


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00540	Connector, dc plug, 5.5x2.1x23 mm, molding style, spring contacts, nickel plated, 105° C	1	
2	30-00795	Wire, 2C TS, 18 AWG, UL2651, 300V, 105C, 4.4 mm, VW-1, PVC, red and black	1	
3	24-00003	Overmold, PVC	1	black

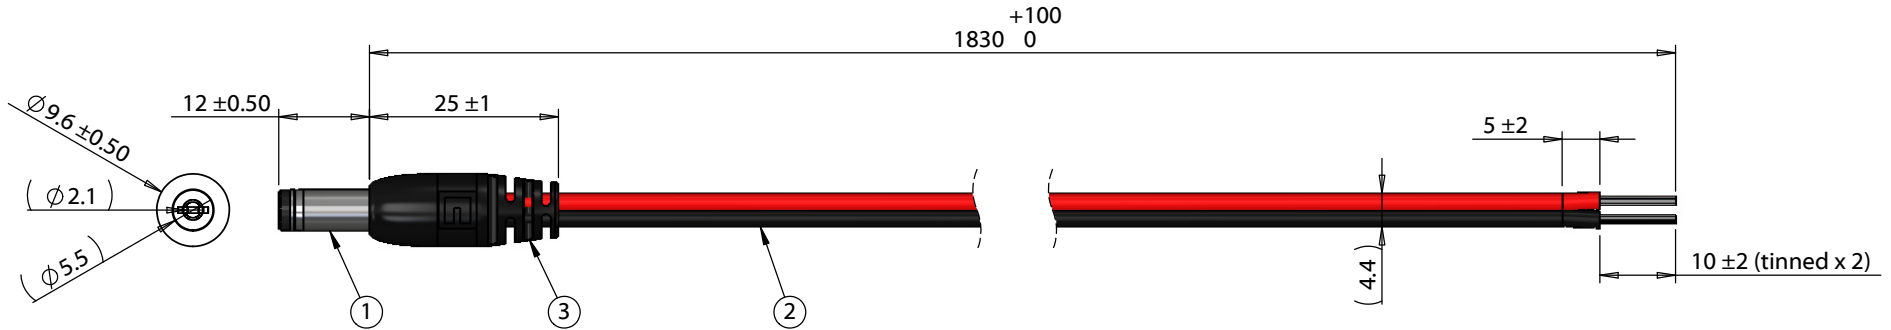

Wiring Diagram	
50-00540	wire color
center	red
sleeve	black

Notes:
Functionally equivalent components may be substituted

Revision: A	Date: 12/6/2016	Description: Initial release	Prepared: AG <small>Digitally signed by AG Date: 2017.07.31 17:04:28 -07'00'</small>	Notes: RoHS compliant	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
			Verified: LA <small>Digitally signed by LA Date: 2017.08.03 08:46:42 -07'00'</small>	Function test: no open, no short circuit, no intermittent	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 5.5x2.1x12 mm 50-00540 dc plug to 10 mm tinned, 18 AWG, 30-00795 R-B wire, 105° C	Size: A
					Part number: 10-02318
					Scale: 1:1
					Sheet 1 of 1

5

↑

4

3

2

1