TINA2-RS

~14° spot beam optimized for Osram Golden Dragon+. Assembly with holder and installation tape.



TECHNICAL SPECIFICATIONS:

Dimensions	Ø 16.1 mm
Height	10.1 mm
Fastening	tape
ROHS compliant	yes

MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
TINA2-O-PLUS-RS	Single lens	PMMA	clear	
TINA2-O-PLUS-HLD-WHT	Holder	PC	white	
TINA-TAPE3	Tape	Acrylic foam	black	

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CA11847_TINA2-RS » Box size: 451 x 241 x 298 mm	Single lens	4140	230	230	0.0

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.



Bottom view

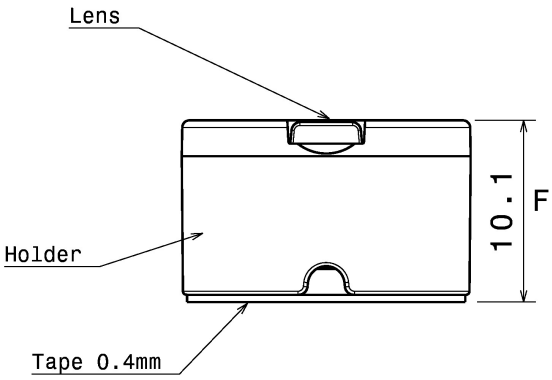

Front view

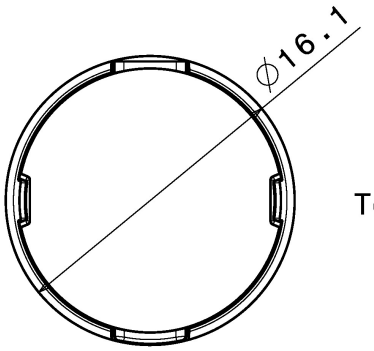

Top view

MATERIALS
Lens: PMMA
Holder: PC
Tape: Acrylic foam

This drawing is our property.
It can't be reproduced
or communicated without
our written agreement.

DRAWN BY m	DATE 29.04.2011	DRAWING TITLE: Datasheet Tina2-O-Plus Assy			
CHECKED BY t k	DATE 29.04.2011	SIZE A4	DRAWING NUMBER		REV 2
DESIGNED BY HH	DATE 01.01.2011	SCALE 3:1	WEIGHT(g) -		SHEET 1/1

See also our general installation guide: www.ledil.com/installation_guide

PHOTOMETRIC DATA (MEASURED):

OSRAM
Opto Semiconductors

LED	Golden Dragon+
FWHM / FWTM	10.0° / 20.0°
Efficiency	93 %
Peak intensity	18 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):

CREE LED

LED	XP-G2 HE
FWHM / FWTM	17.0° / 34.0°
Efficiency	88 %
Peak intensity	6.8 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

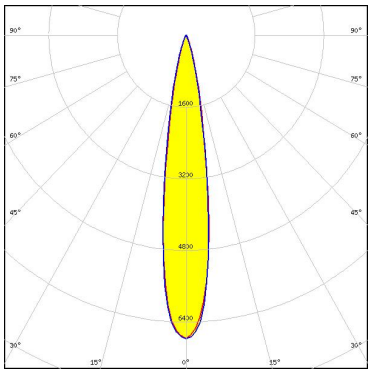

CREE LED

LED	XP-G3
FWHM / FWTM	16.0° / 34.0°
Efficiency	85 %
Peak intensity	6.6 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

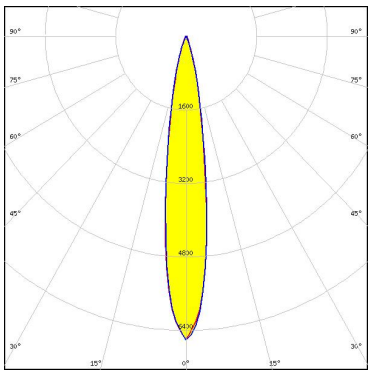

CREE LED

LED	XP-L HI
FWHM / FWTM	12.0° / 30.0°
Efficiency	89 %
Peak intensity	9.6 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

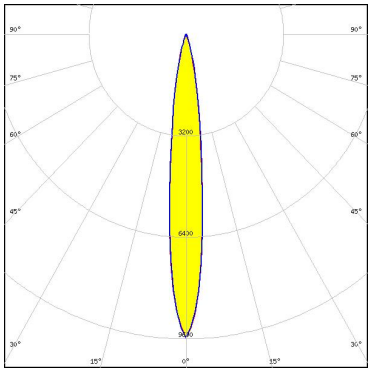

CREE LED

LED	XT-E
FWHM / FWTM	12.0° / 30.0°
Efficiency	82 %
Peak intensity	8 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

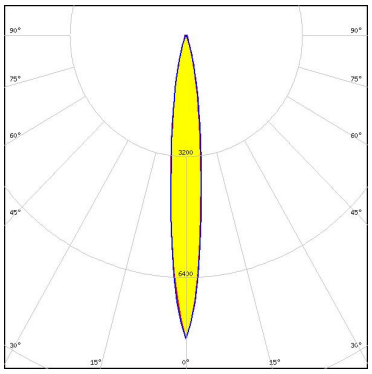

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):

LUMILEDS

LED	LUXEON 3030 HE Plus
FWHM / FWTM	14.0° / 34.0°
Efficiency	87 %
Peak intensity	7.4 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

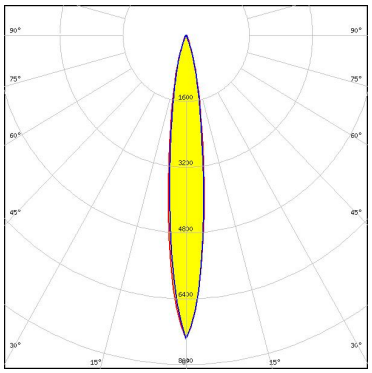

LUMILEDS

LED	LUXEON 5050 Square LES
FWHM / FWTM	22.0° / 52.0°
Efficiency	85 %
Peak intensity	2.8 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

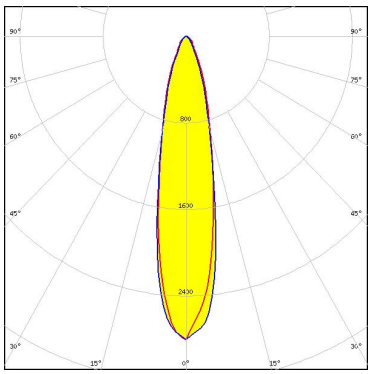

LUMILEDS

LED	LUXEON IR Domed 150
FWHM / FWTM	10.0° / 27.0°
Efficiency	81 %
LEDs/each optic	1
Light colour	IR
Required components:	

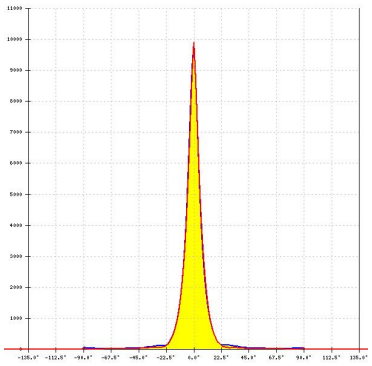

NICHIA

LED	NV4WB35AM
FWHM / FWTM	20.0° / 44.0°
Efficiency	86 %
Peak intensity	3.9 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

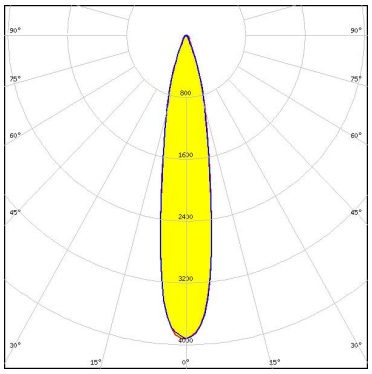

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):

OSRAM
Opto Semiconductors

LED	Duris S8
FWHM / FWTM	25.0° / 59.0°
Efficiency	85 %
Peak intensity	2.2 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

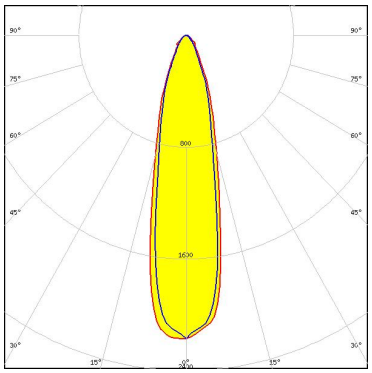

OSRAM
Opto Semiconductors

LED	KW CULPM1.TG
FWHM / FWTM	10.0° / 24.0°
Efficiency	89 %
Peak intensity	15.1 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

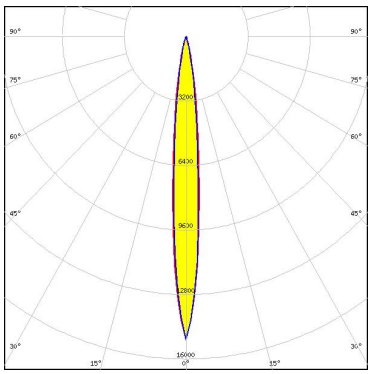

OSRAM
Opto Semiconductors

LED	PLPVEC2 850A
FWHM / FWTM	10.0° / 23.0°
Efficiency	93 %
LEDs/each optic	1
Light colour	IR
Required components:	

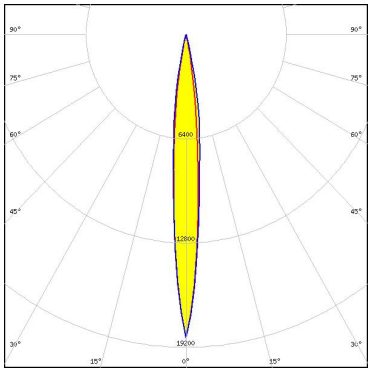

OSRAM
Opto Semiconductors

LED	SFH 4232A
FWHM / FWTM	8.0° / 19.0°
Efficiency	94 %
LEDs/each optic	1
Light colour	IR
Required components:	

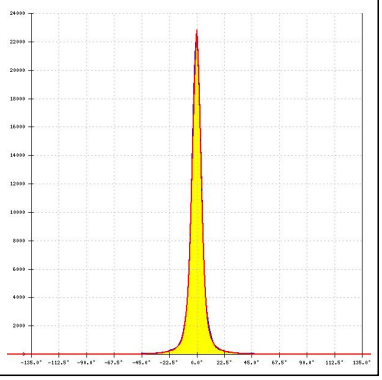

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):

OSRAM
Opto Semiconductors

LED	SFH 4715AS
FWHM / FWTM	17.0° / 35.0°
Efficiency	88 %
LEDs/each optic	1
Light colour	IR
Required components:	

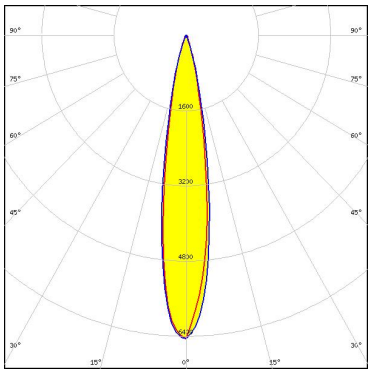

OSRAM
Opto Semiconductors

LED	SFH 4725S
FWHM / FWTM	14.0° / 32.0°
Efficiency	88 %
LEDs/each optic	1
Light colour	IR
Required components:	

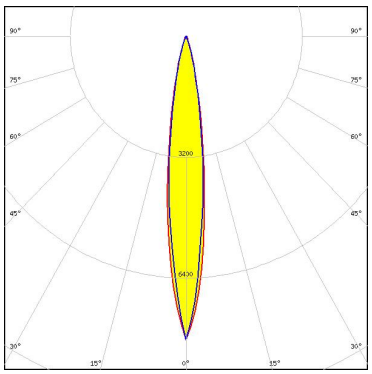

OSRAM
Opto Semiconductors

LED	SFH 4727AS
FWHM / FWTM	23.0° / 42.0°
Efficiency	86 %
LEDs/each optic	1
Light colour	IR
Required components:	





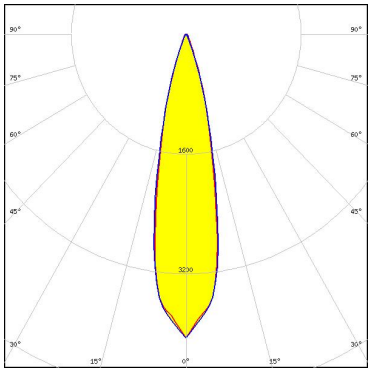

SAMSUNG

LED	LH351C
FWHM / FWTM	16.0° / 34.0°
Efficiency	91 %
Peak intensity	7.2 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

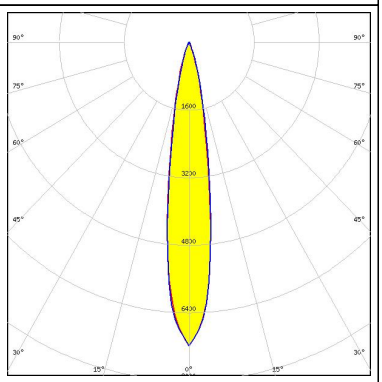

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy
Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.
228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.
405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support
www.ledil.com/
where_to_buy

Shipping locations
Salo, Finland
Hong Kong, China

Distribution Partners
www.ledil.com/
where_to_buy

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.