SEANNA-A

~2.3° spot beam. Assembly with holder.



TECHNICAL SPECIFICATIONS:

Dimensions	Ø 155.2 mm
Height	82 mm
Fastening	pin, screw
ROHS compliant	yes


MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
SEANNA-A	Single lens	PMMA	clear	
SEANNA-FRES	Single lens	PMMA	clear	
SEANNA-HLD-B	Holder	PA66GF30	black	
SEANNA-HLD-B-TOPRING	Holder	PA66GF30	black	
SEANNA-HLD-B-BOTTOMRING	Holder	PA66GF30	black	
SEANNA-SCREW	Accessory	Stainless steel	clear	

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
FCP13895_SEANNA-A » Box size:	Single lens		20	2	6.5

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

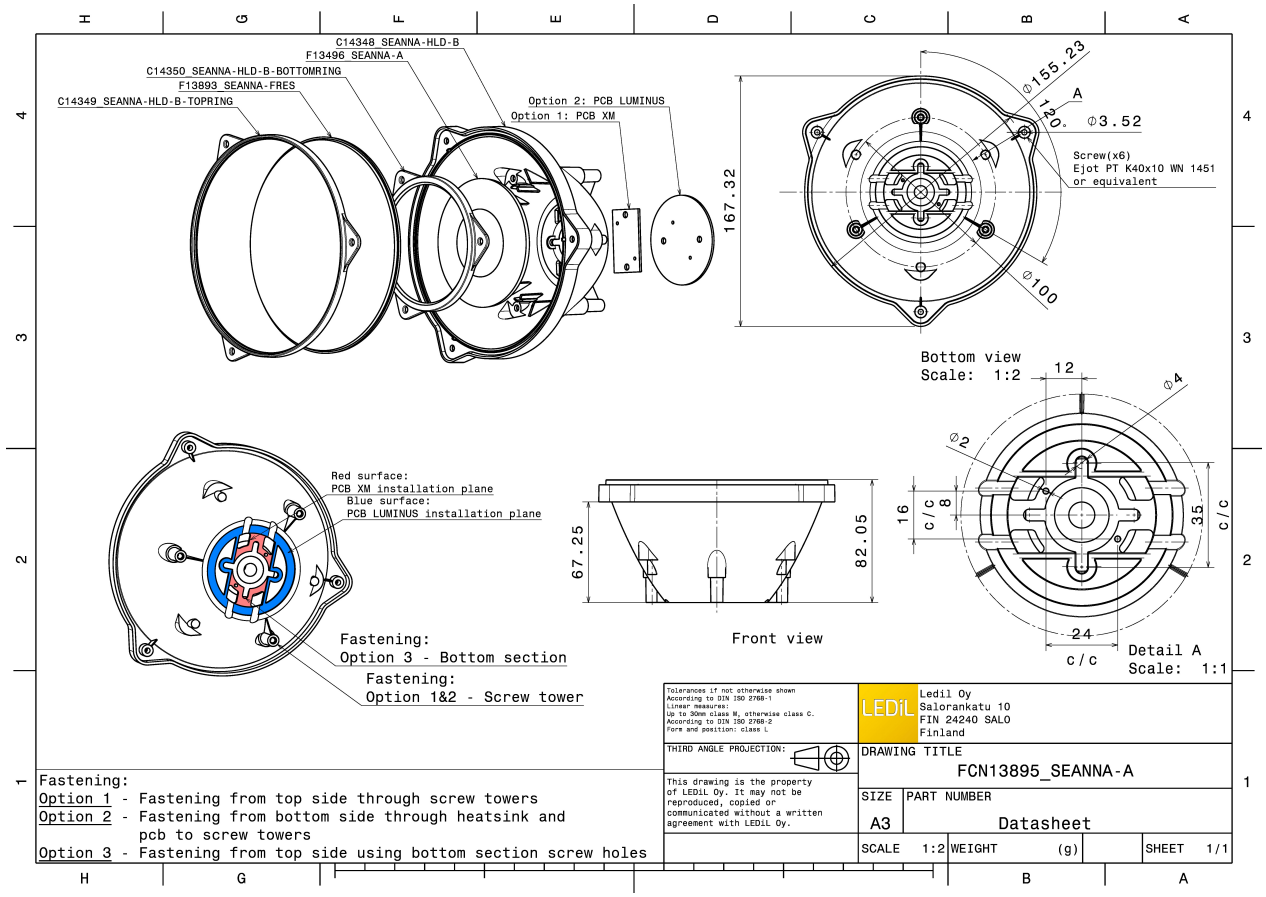

See also our general installation guide: www.ledil.com/installation_guide


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.


PHOTOMETRIC DATA (MEASURED):

CREE LED

LED	XD16
FWHM / FWTM	1.0° / 3.0°
Efficiency	91 %
Peak intensity	629 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

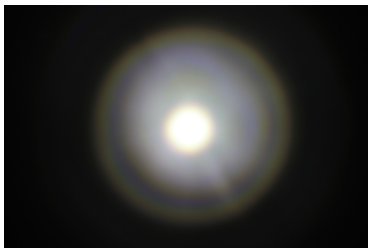


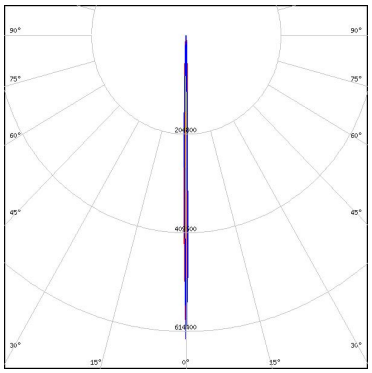


CREE LED

LED	XP-E2
FWHM / FWTM	1.0° / 3.0°
Efficiency	%
Peak intensity	718 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

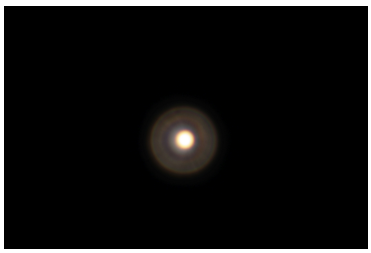


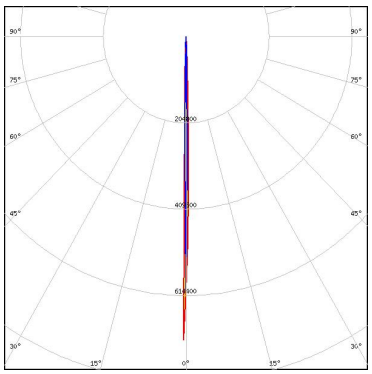


CREE LED

LED	XP-L HD
FWHM / FWTM	2.4° / 5.3°
Efficiency	94 %
Peak intensity	255 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

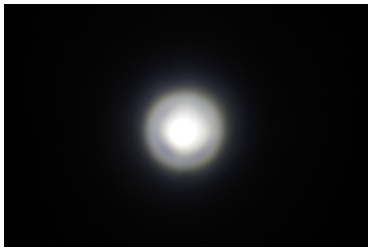


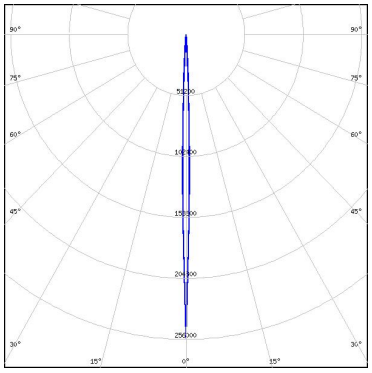

CREE LED

LED	XP-L HI
FWHM / FWTM	1.6° / 3.2°
Efficiency	94 %
Peak intensity	492 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

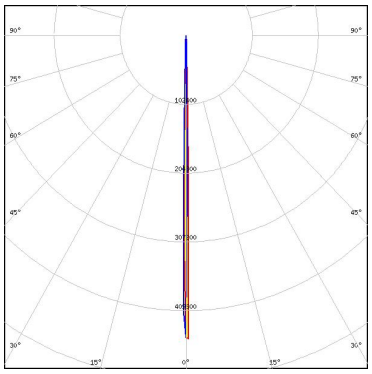



LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (MEASURED):

NICHIA


LED	NVSW3x9A
FWHM / FWTM	1.9° / 4.1°
Efficiency	92 %
Peak intensity	310 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

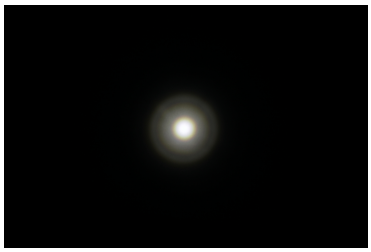

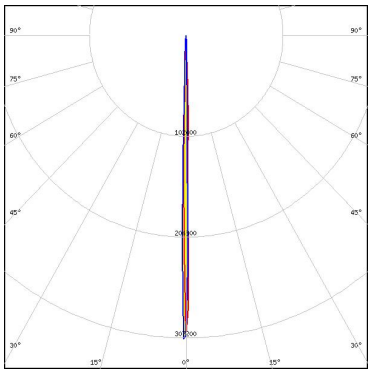


OSRAM
Opto Semiconductors

LED	OSLON Black Flat
FWHM / FWTM	1.2° / 2.3°
Efficiency	94 %
Peak intensity	1196 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

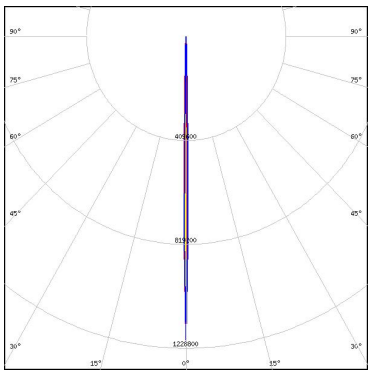

OSRAM
Opto Semiconductors

LED	OSLON Square CSSRM2/CSSRM3
FWHM / FWTM	1.5° / 3.3°
Efficiency	94 %
Peak intensity	587 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

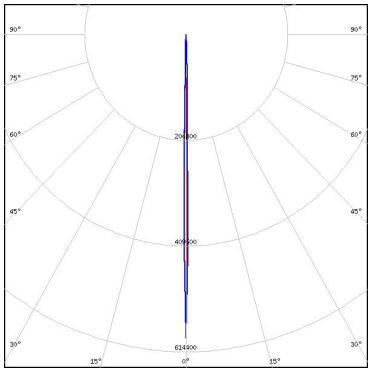


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):


CREE LED

LED	MK-R
FWHM / FWTM	4.0° / 10.4°
Efficiency	91 %
Peak intensity	82 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

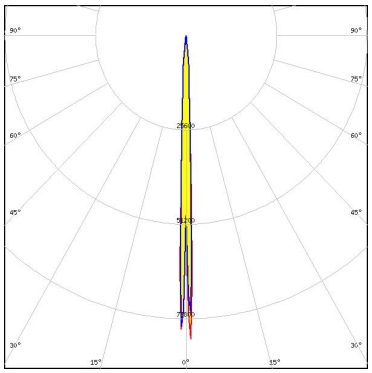

CREE LED

LED	XB-D
FWHM / FWTM	1.3° / 3.2°
Efficiency	87 %
Peak intensity	698 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

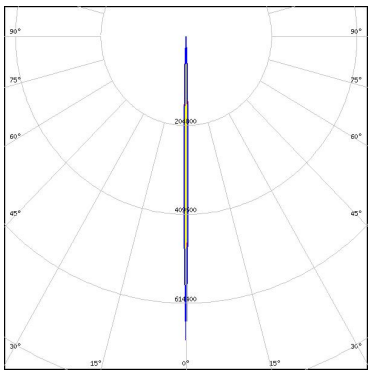


CREE LED

LED	XHP35 HD
FWHM / FWTM	2.4° / 4.2°
Efficiency	89 %
Peak intensity	257 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

CREE LED

LED	XHP35 HI
FWHM / FWTM	1.6° / 3.6°
Efficiency	83 %
Peak intensity	496 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

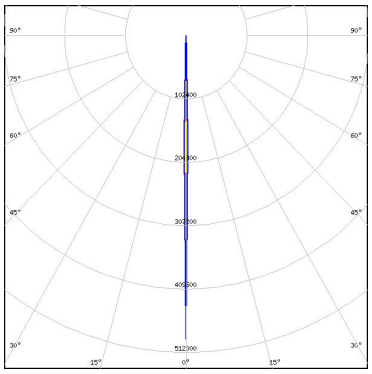


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):


CREE LED

LED	XHP35.2
FWHM / FWTM	2.0° / 6.0°
Efficiency	89 %
Peak intensity	161.9 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

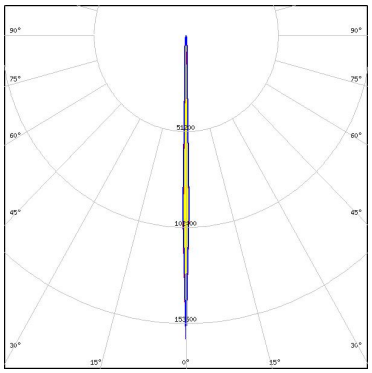


CREE LED

LED	XHP35.2 HI
FWHM / FWTM	2.0° / 4.0°
Efficiency	89 %
Peak intensity	161 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

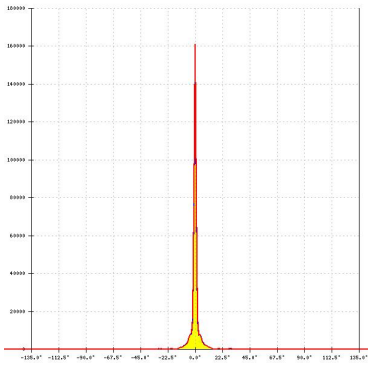


CREE LED

LED	XHP50
FWHM / FWTM	3.3° / 6.7°
Efficiency	87 %
Peak intensity	122 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

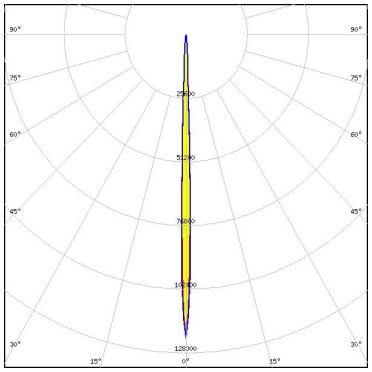

CREE LED

LED	XHP50.2
FWHM / FWTM	2.7° / 6.8°
Efficiency	84 %
Peak intensity	128.7 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

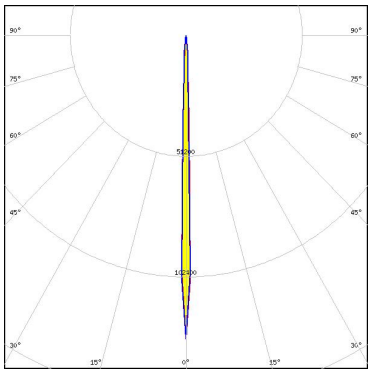


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):


CREE LED

LED	XHP70
FWHM / FWTM	4.3° / 10.4°
Efficiency	81 %
Peak intensity	69.9 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

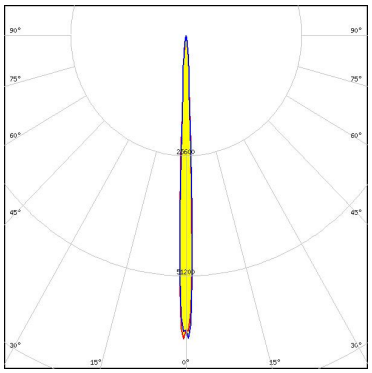


CREE LED

LED	XHP70.2
FWHM / FWTM	4.5° / 10.1°
Efficiency	83 %
Peak intensity	71.6 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

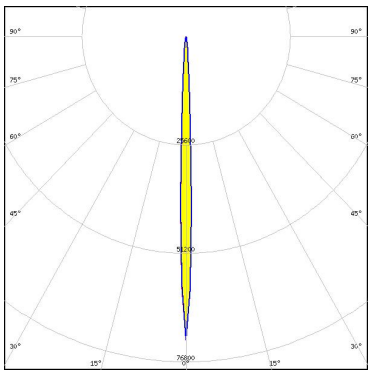


CREE LED

LED	XM-L
FWHM / FWTM	2.4°
Efficiency	%
Peak intensity	272 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

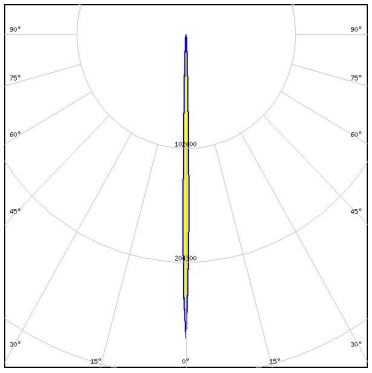

CREE LED

LED	XM-L2
FWHM / FWTM	2.0° / 3.9°
Efficiency	85 %
Peak intensity	275 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

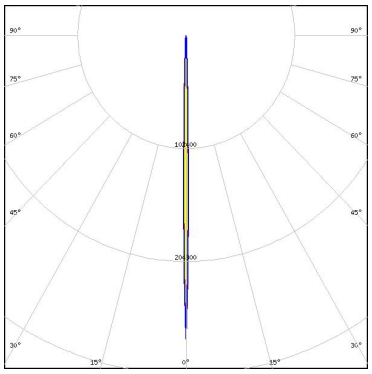


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):


CREE LED

LED	XM-L3
FWHM / FWTM	2.0° / 6.0°
Efficiency	90 %
Peak intensity	196.2 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

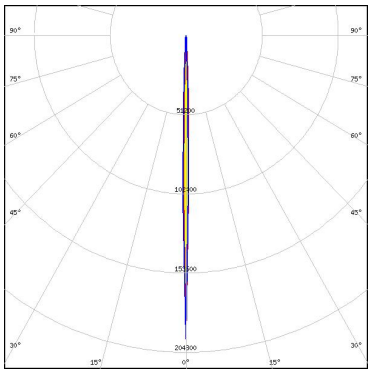


CREE LED

LED	XP-E
FWHM / FWTM	1.2° / 2.9°
Efficiency	92 %
Peak intensity	955 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

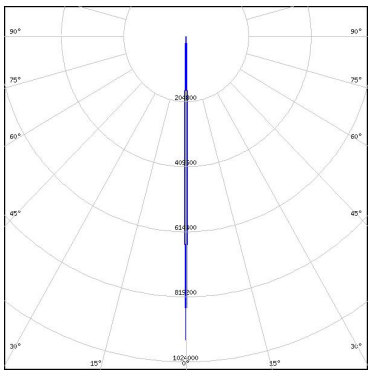


CREE LED

LED	XP-E2
FWHM / FWTM	2.0° / 6.0°
Efficiency	85 %
Peak intensity	211.5 cd/lm
LEDs/each optic	1
Light colour	Blue
Required components:	

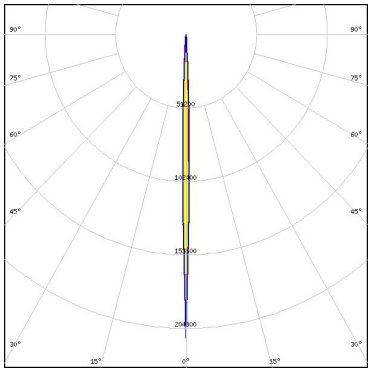

CREE LED

LED	XP-G
FWHM / FWTM	1.4° / 3.4°
Efficiency	90 %
Peak intensity	578 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

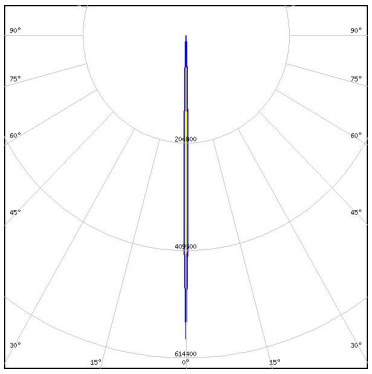


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):


CREE LED

LED	XP-G2
FWHM / FWTM	1.4° / 3.2°
Efficiency	91 %
Peak intensity	628 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

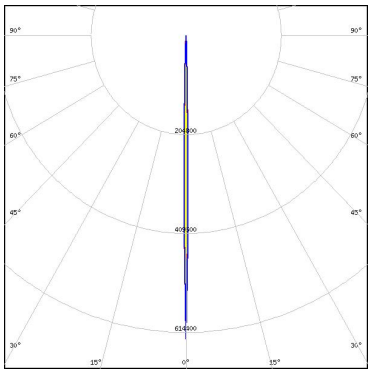


CREE LED

LED	XP-G2 HE
FWHM / FWTM	2.0° / 4.0°
Efficiency	89 %
Peak intensity	286.5 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

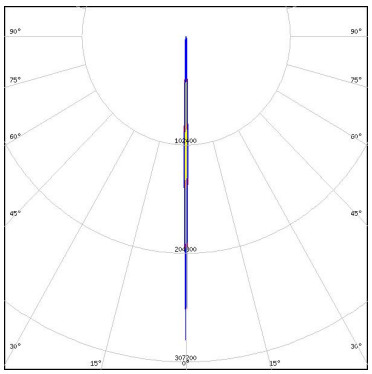


CREE LED

LED	XP-G3
FWHM / FWTM	2.0° / 4.0°
Efficiency	88 %
Peak intensity	246.2 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

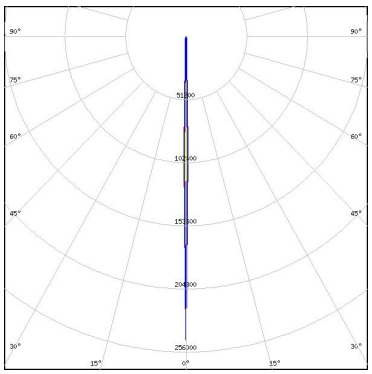

CREE LED

LED	XP-P
FWHM / FWTM	2.0° / 6.0°
Efficiency	84 %
Peak intensity	246.8 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

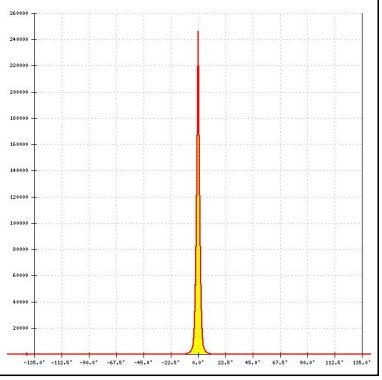


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):

CREE LED

LED	XQ-E HD
FWHM / FWTM	1.1° / 2.5°
Efficiency	92 %
Peak intensity	1460 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

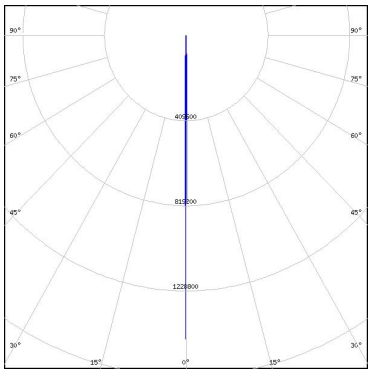


CREE LED

LED	XQ-E HI
FWHM / FWTM	1.2° / 2.0°
Efficiency	90 %
Peak intensity	1300 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	


CREE LED

LED	XT-E
FWHM / FWTM	1.4° / 3.5°
Efficiency	88 %
Peak intensity	519 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

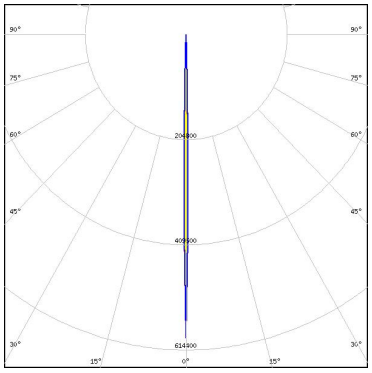

LED ENGIN

LED	LZ4 (00xW00)
FWHM / FWTM	3.3° / 8.2°
Efficiency	91 %
Peak intensity	136 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

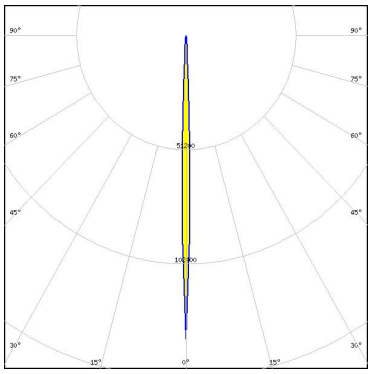


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):


LUMILEDS

LED	LUXEON CZ
FWHM / FWTM	1.7° / 3.9°
Efficiency	93 %
Peak intensity	346 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

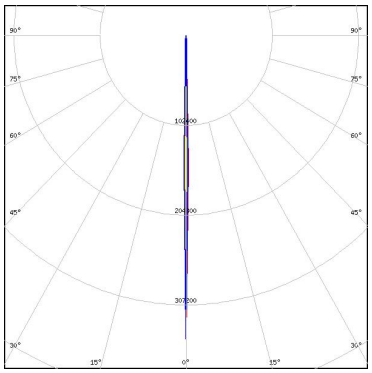


LUMILEDS

LED	LUXEON CZ
FWHM / FWTM	1.4° / 3.7°
Efficiency	94 %
Peak intensity	424 cd/lm
LEDs/each optic	1
Light colour	Green
Required components:	

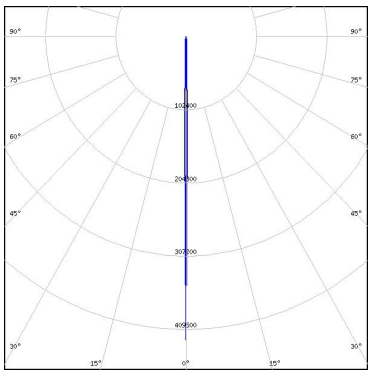


LUMILEDS

LED	LUXEON CZ
FWHM / FWTM	1.3° / 3.4°
Efficiency	94 %
Peak intensity	564 cd/lm
LEDs/each optic	1
Light colour	PC Amber
Required components:	

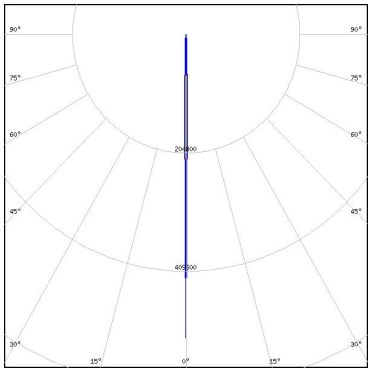

LUMILEDS

LED	LUXEON CZ
FWHM / FWTM	1.6° / 3.8°
Efficiency	93 %
Peak intensity	371 cd/lm
LEDs/each optic	1
Light colour	Blue
Required components:	

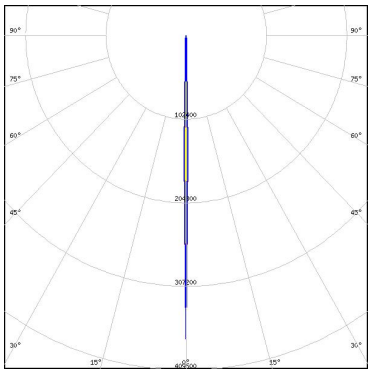


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):


LUMILEDS

LED	LUXEON CZ
FWHM / FWTM	1.2° / 3.3°
Efficiency	94 %
Peak intensity	564 cd/lm
LEDs/each optic	1
Light colour	Red
Required components:	

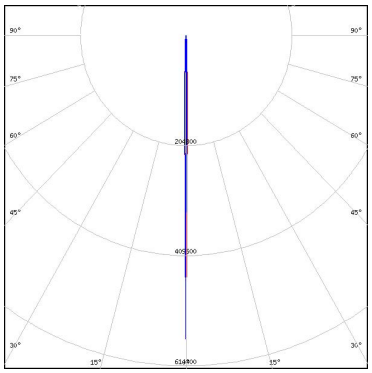


LUMILEDS

LED	LUXEON HL2X
FWHM / FWTM	2.0° / 4.0°
Efficiency	89 %
Peak intensity	317.8 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

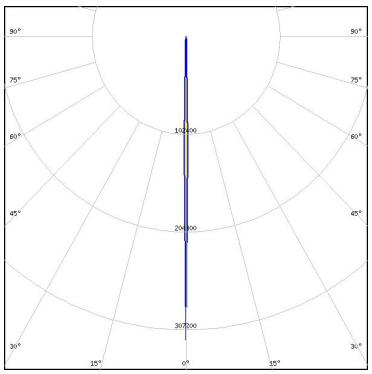


LUMILEDS

LED	LUXEON M/MX
FWHM / FWTM	3.6° / 9.0°
Efficiency	89 %
Peak intensity	99 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

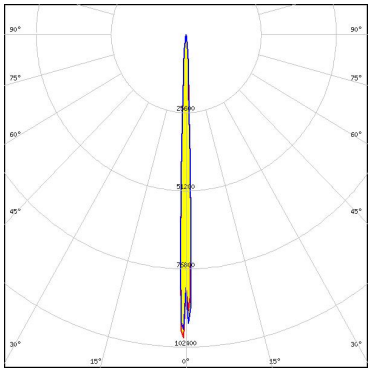

LUMILEDS

LED	LUXEON MZ
FWHM / FWTM	2.2° / 6.0°
Efficiency	84 %
Peak intensity	151 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

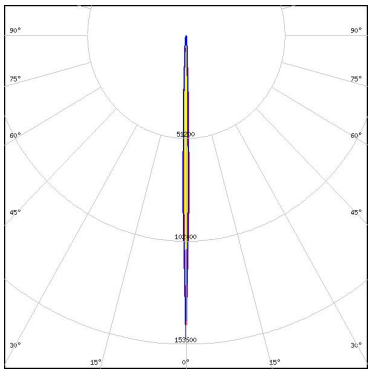


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):


LUMILEDS

LED	LUXEON Rebel
FWHM / FWTM	1.3° / 3.2°
Efficiency	90 %
Peak intensity	704 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

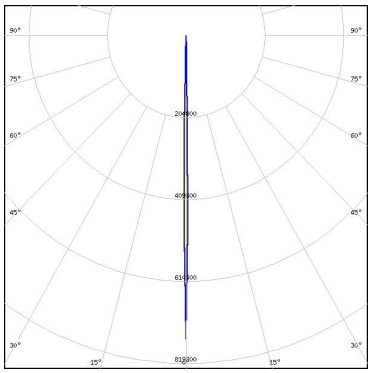


LUMILEDS

LED	LUXEON Rebel ES
FWHM / FWTM	1.6° / 3.6°
Efficiency	90 %
Peak intensity	530 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

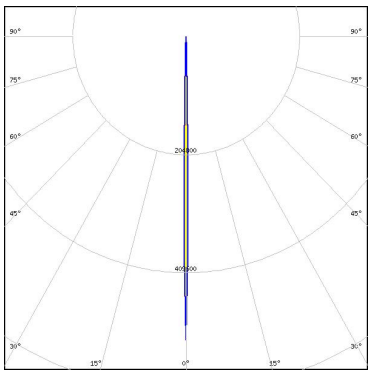


LUMILEDS

LED	LUXEON Rubix
FWHM / FWTM	2.0° / 4.0°
Efficiency	88 %
Peak intensity	290.2 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

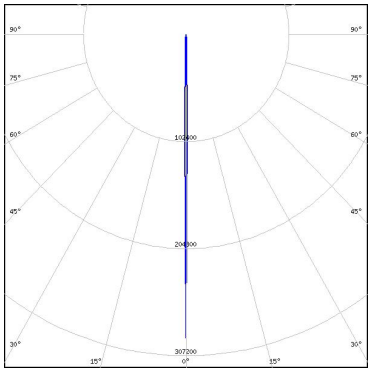

LUMILEDS

LED	LUXEON Rubix
FWHM / FWTM	2.0° / 6.0°
Efficiency	83 %
Peak intensity	141.9 cd/lm
LEDs/each optic	1
Light colour	Blue
Required components:	

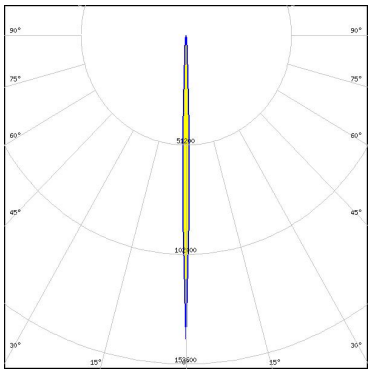


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):


LUMILEDS

LED	LUXEON Rubix
FWHM / FWTM	2.0° / 6.0°
Efficiency	83 %
Peak intensity	157.7 cd/lm
LEDs/each optic	1
Light colour	Green
Required components:	

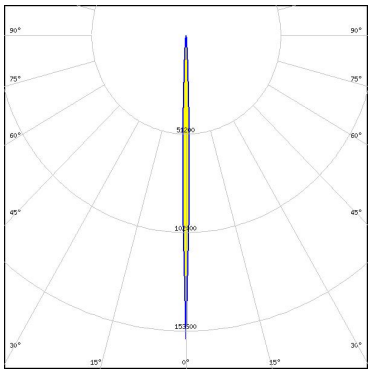


LUMILEDS

LED	LUXEON Rubix
FWHM / FWTM	2.0° / 6.0°
Efficiency	85 %
Peak intensity	196.2 cd/lm
LEDs/each optic	1
Light colour	Red
Required components:	

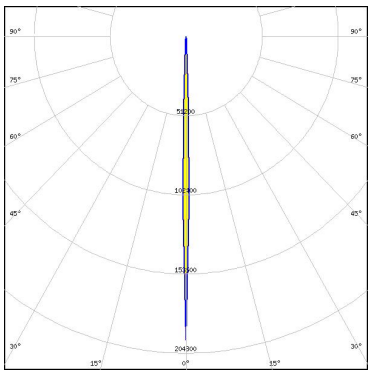


LUMILEDS

LED	LUXEON S1000
FWHM / FWTM	3.8° / 8.0°
Efficiency	88 %
Peak intensity	100 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

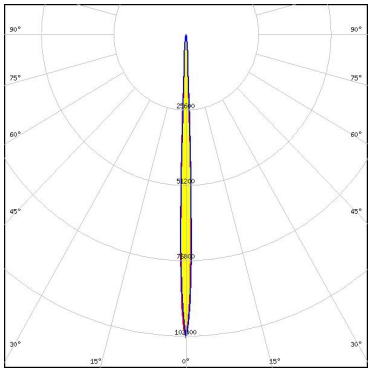

LUMILEDS

LED	LUXEON V2
FWHM / FWTM	2.0° / 4.0°
Efficiency	88 %
Peak intensity	250.1 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

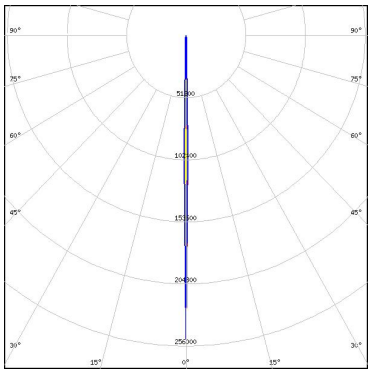


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):


LUMINUS

LED	SBT-90
FWHM / FWTM	2.3° / 4.8°
Efficiency	90 %
Peak intensity	253 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

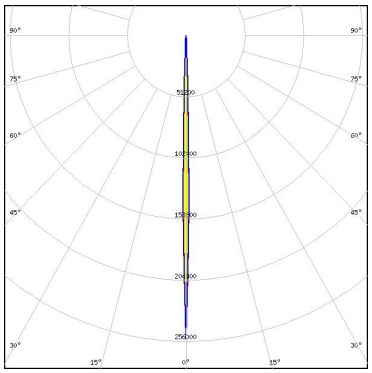


LUMINUS

LED	SBT-90
FWHM / FWTM	2.0° / 6.0°
Efficiency	76 %
Peak intensity	175.9 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

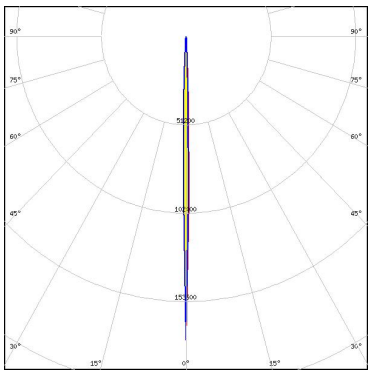


NICHIA

LED	NV4WB35AM
FWHM / FWTM	2.0° / 4.0°
Efficiency	90 %
Peak intensity	185.5 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

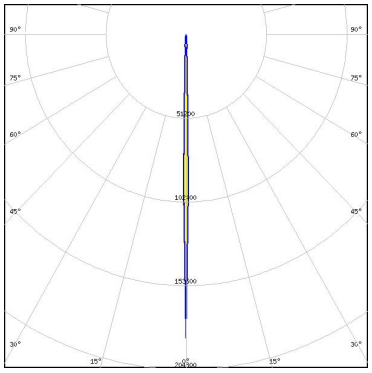

NICHIA

LED	NVSW219F
FWHM / FWTM	2.0° / 4.0°
Efficiency	89 %
Peak intensity	296 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

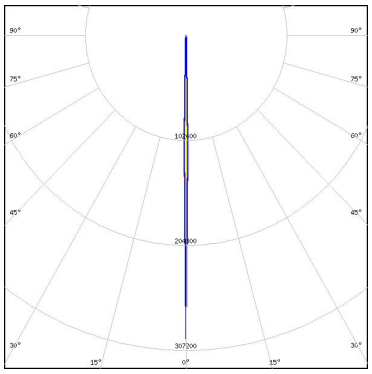


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):


NICHIA

LED	NVSW519A
FWHM / FWTM	2.0° / 4.0°
Efficiency	89 %
Peak intensity	251.6 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

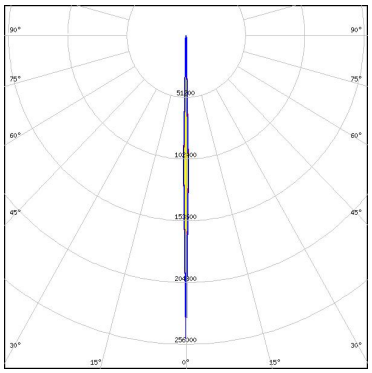


OSRAM
Opto Semiconductors

LED	KW CSLPM1.TG
FWHM / FWTM	2.0° / 4.0°
Efficiency	90 %
Peak intensity	229.3 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

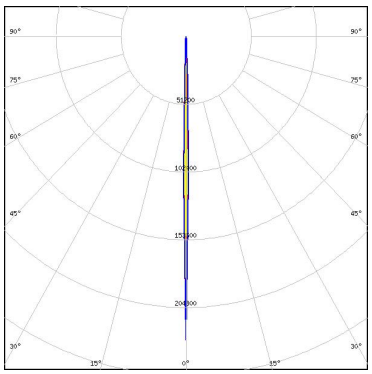


OSRAM
Opto Semiconductors

LED	KW CULPM1.TG
FWHM / FWTM	2.0° / 6.0°
Efficiency	92 %
Peak intensity	176.8 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

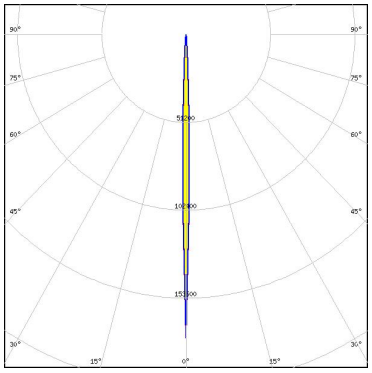

OSRAM
Opto Semiconductors

LED	OSCONIQ C 2424
FWHM / FWTM	2.0° / 4.0°
Efficiency	90 %
Peak intensity	241.6 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

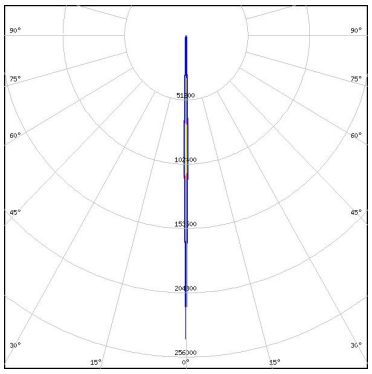


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):


OSRAM
Opto Semiconductors

LED	OSCONIQ P 3737 (2W version)
FWHM / FWTM	2.0° / 4.0°
Efficiency	89 %
Peak intensity	258.2 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

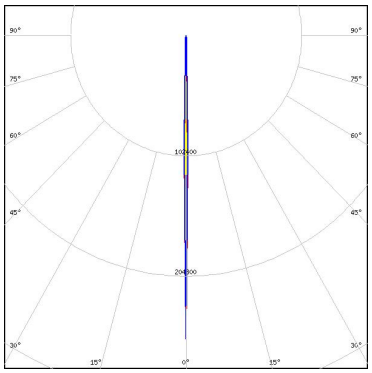


OSRAM
Opto Semiconductors

LED	OSCONIQ P 3737 (3W version)
FWHM / FWTM	2.0° / 4.0°
Efficiency	90 %
Peak intensity	232.3 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

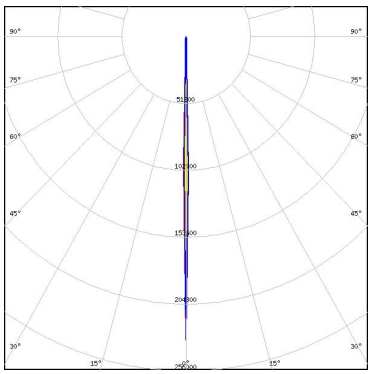


OSRAM
Opto Semiconductors

LED	OSCONIQ P 7070
FWHM / FWTM	3.5° / 7.1°
Efficiency	91 %
Peak intensity	122.2 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

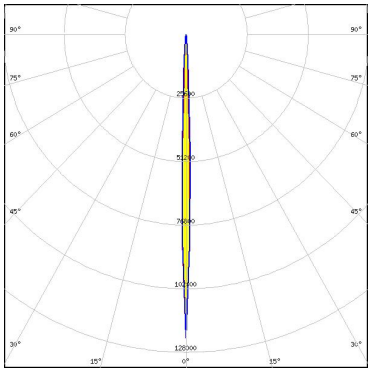

OSRAM
Opto Semiconductors

LED	OSLON Square PC
FWHM / FWTM	1.5° / 3.6°
Efficiency	89 %
Peak intensity	550 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

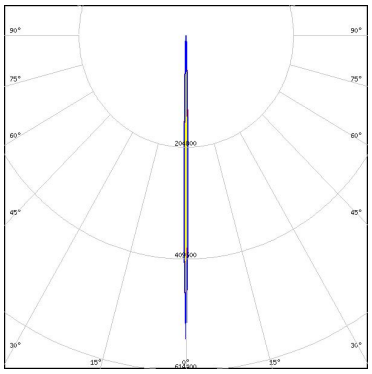


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):


SAMSUNG

LED	LH351B
FWHM / FWTM	2.0° / 4.0°
Efficiency	90 %
Peak intensity	279.4 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

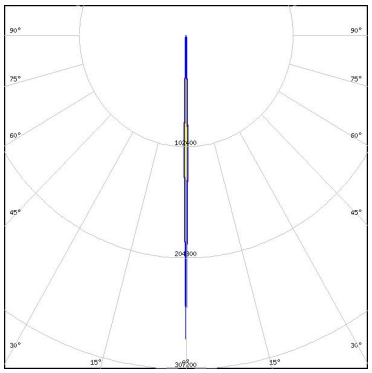


SAMSUNG

LED	LH351C
FWHM / FWTM	2.0° / 4.0°
Efficiency	91 %
Peak intensity	279.2 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

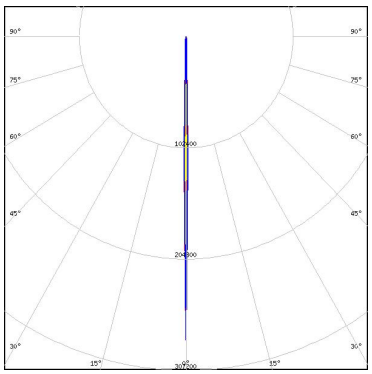


SAMSUNG

LED	LH351D
FWHM / FWTM	2.0° / 4.0°
Efficiency	91 %
Peak intensity	235.3 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

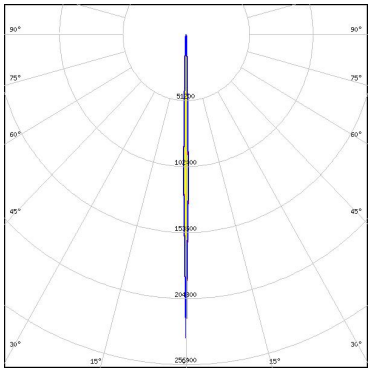

SEOUL SEMICONDUCTOR

LED	Z8Y50P
FWHM / FWTM	3.0° / 7.0°
Efficiency	79 %
Peak intensity	90.4 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

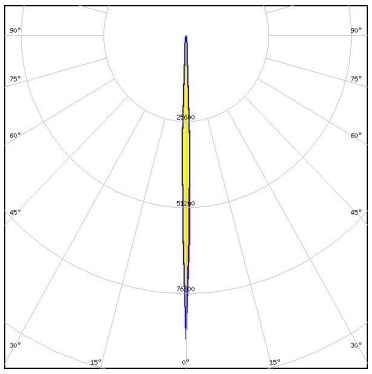

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy
Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.
228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.
405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support
www.ledil.com/
where_to_buy

Shipping locations
Salo, Finland
Hong Kong, China

Distribution Partners
www.ledil.com/
where_to_buy

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.