

3M Science.
Applied to Life.™

Shaping the future

3M™ Cubitron™ II Abrasive Belts

The speed and cutting power of 3M precision shaped grain – now available in more grades and constructions!

CUBITRON™ II

Forget everything you know about grinding with abrasive belts.

3M™ Cubitron™ II Abrasive Belts have set the world standard for cutting speed and belt life. Now, our expanded lineup of Cubitron II belts gives you more choices of grades, sizes and constructions – so you can enjoy the same world-class performance in applications ranging from high pressure automated grinding to low and medium pressure offhand applications.

Cubitron II belts continue to raise the bar for grinding performance and productivity – thanks to a breakthrough 3M technology that re-writes the rules for speed, consistency and belt life.

- Average up to 30% faster cutting on hard-to-grind metals than the next-best competitive belt
- Cuts cooler – diverts heat from the workpiece and belt to the swarf
- Helps eliminate burnishing and heat stress
- Lasts up to 4 times as long as conventional ceramic aluminum oxide belts
- Now available in more belt sizes, grades and constructions, for applications ranging from high pressure, automated grinding to low and medium pressure offhand operations

▲ Improved Productivity

“With Cubitron II belts, we’ve reduced belt changeover time by over 50%.”

– Casting House

Shaping a new era



As shown by the sparks in this photo, Cubitron II abrasives divert heat to the swarf, keeping both the workpiece and the belt cooler.

The secret behind the revolutionary performance of new Cubitron II belts lies in their proprietary triangular-shaped abrasive grain. These self-sharpening triangles are designed to fracture as they wear, continuously forming new, super-sharp points and edges that slice cleanly through the metal like a knife, instead of gouging or plowing. This prevents heat from building up in the workpiece – reducing heat-related stress cracks and discoloration. And, because the abrasive itself stays cooler and sharper, it lasts up to four times as long as conventional ceramic grain belts!

▲ Less Operator Fatigue

“Because Cubitron II belts cut faster, nearly all operators report that much less pressure is required throughout the life of the belt.”

– Aerospace Parts Manufacturer



▲ Higher Cut Rates

“It took our operator 60 minutes to complete a work order using a competitor’s belt. He completed the same size work order in just 45 minutes, using a Cubitron II belt.”

– Precision Casting Company

▲ Longer Belt Life

“I was able to get three times the life with the 994F 36+ versus the competitive ceramic belt. Not only did this increase my productivity but it also reduced the hassle of belt changeover.”

– Foundry Operator




▲ **Cuts Cooler, for Improved Part Quality**

“We processed 24 parts with no heat stress using a single Cubitron II belt, versus a competitive belt that showed signs of heat stress on the very first part.”



– *Investment Casting Company*



of grinding performance

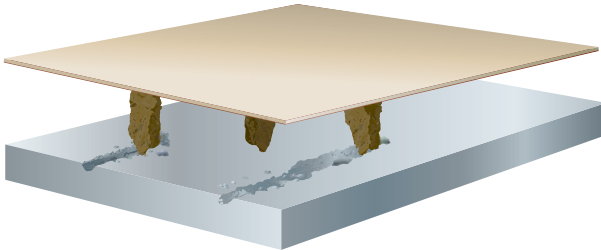

Conventional ceramic abrasive grain is irregular and blocky in shape. Instead of a clean, machining action, the grain tends to “plow” through the metal, causing heat to build up in the workpiece and the abrasive – resulting in a slower cut, shorter belt life and undesirable effects, such as burnishing.

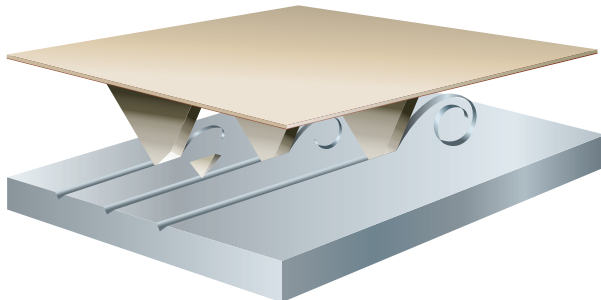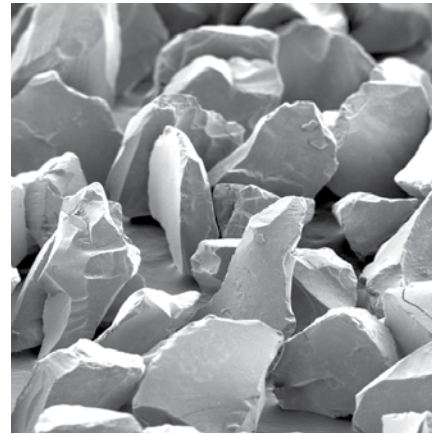

The new precision-shaped grain found in 3M™ Cubitron™ II Belts combines the advanced material properties of our original Cubitron grain with the precise microreplicated structures pioneered in 3M™ Trizact™ Abrasives. As the triangular shaped grain wears, it continuously fractures to form sharp points and edges. The result is a belt that cuts faster, stays cooler and lasts up to 4 times longer than the next best competitive belt.



How cool is this?

3M™ Cubitron™ II Belts are engineered to run cooler, eliminating metal discoloration/oxidation and reducing the chance of heat-related stress cracks.



3M Cubitron™ II 984F 36+ Competitive Belt 1 Competitive Belt 2 Competitive Belt 3

This photo shows four identical 304 stainless steel bars after nine grinding cycles of ten seconds each. While the three bars that were ground using conventional ceramic abrasive belts show varying degrees of oxidation, the bar ground with a Cubitron II belt is free of burnishing.

No contest.

Cubitron II vs. Conventional Grain Competitors



50% More Material Removed


This photo shows three identical 304 stainless steel bars after nine grinding cycles of ten seconds per cycle using equal pressure. In that time, the Cubitron II belt removed more than 50% more metal than the so-called “next-generation” ceramic grain abrasive.

Taking productivity to the next level

3M™ Cubitron™ II Belts not only last up to four times longer than conventional ceramic abrasive belts, but also cut faster throughout their life. This translates to more finished parts per belt per hour – and more profit to your bottom line. But no belt can live up to its full potential – unless your employees see the benefit. That’s where Cubitron II belts can really push your productivity over the top.

For example, many operators report that Cubitron II belts run smoother, and cut fast with less pressure. This can mean less operator fatigue and greater comfort – which in turn can lead to fewer errors, greater consistency and improved employee morale.


3M™ Cubitron™ II Abrasive Belts cut faster!

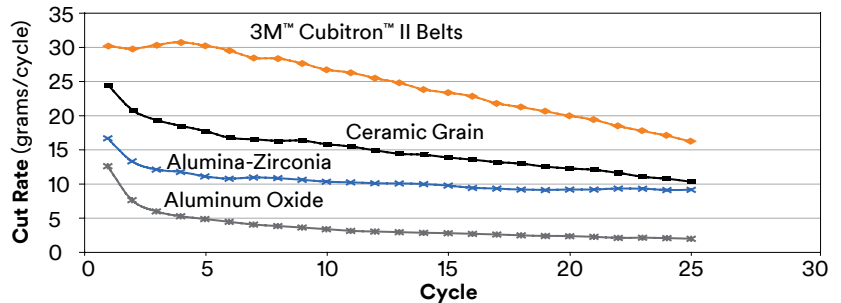

The evolution of high-performance grinding abrasives

In their day, each of the three competitive abrasive technologies shown on this graph represented a major advance in grinding performance. Now, in side-by-side comparisons of cutting rates on stainless steel, Cubitron II sets a new standard in productivity.

3M™ Cubitron™ II Abrasive Belts last longer! Cumulative Cut, SS304: Typical End Point

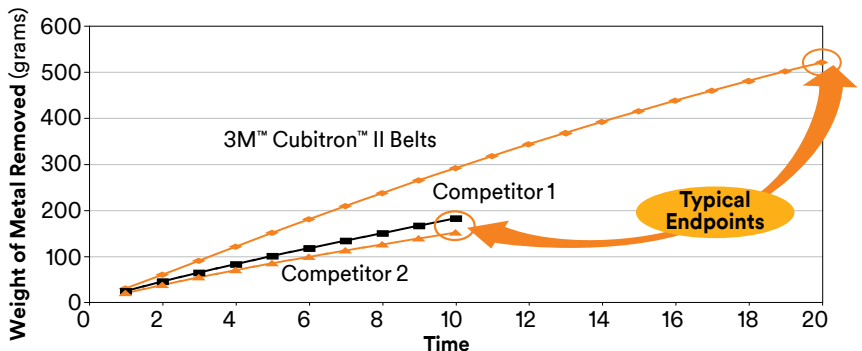

3M surveys indicate that most operators stop using a belt when performance drops to 2/3 of its initial cut rate. As this graph shows, Cubitron II belts take twice as long to reach that end point as conventional ceramic abrasive belts. In addition, Cubitron II belts cut faster throughout their entire life. Bottom line? Not only is more work done per unit of time, but also much more total work per belt.


Our new lineup of 3M™ Cubitron™ II Abrasive Belts

994F Z-weight backing optimal for high pressure carbon steel, aluminum applications

997F ZF-weight backing ideal for high pressure stainless, cobalt chrome and nickel alloy applications

984F YF-weight backing excels in medium/high pressure stainless, cobalt chrome and nickel alloy applications

947A X-weight poly-cotton backing provides greater flexibility – optimized for low/medium pressure applications on stainless, mild steel and aluminum

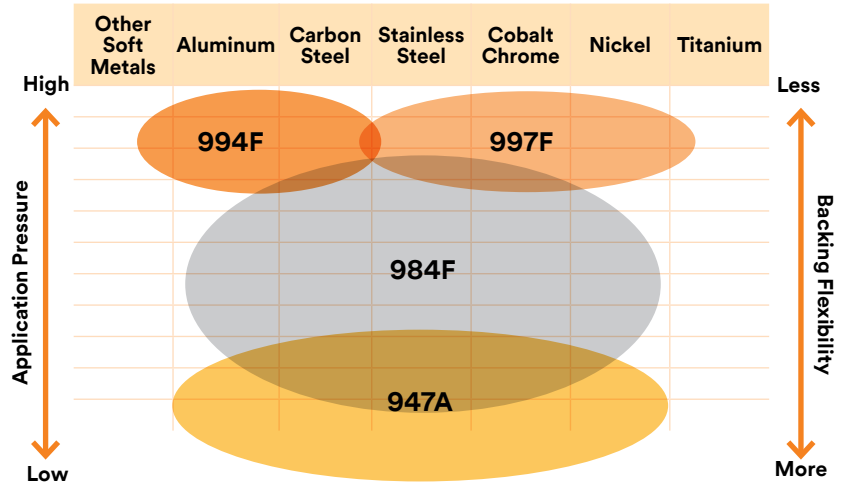

New Grades

The new world standard for cutting speed and belt life

3M™ Cubitron™ II Abrasive Belt Selection Guide

Because of the enhanced efficiency and durability of Cubitron II belts, you can use a similar or finer grade than your current belt, while enjoying significantly faster cut rates and longer belt life. And in many cases, by switching to a Cubitron II belt, you can reduce the number of steps in your sequence, without sacrificing surface finish.

Substrate	Portable/File Tool	Coarse Grade Pressure Assist Grinding	Slack of Belt Sander	Stroke Sander	Benchtop Belt Machine	Backstand Offhand	Centerless and Roll Grinding	Flat Finishing
Carbon Steel	947A/984F	994F	947A	947A	947A/984F	947A/984F	984F	984F
Stainless Steel	947A/984F	997F	947A	947A	947A/984F	947A/984F	984F	984F
Cobalt & Nickel Alloys	947A/984F	997F	947A	-	947A/984F	947A/984F	984F	984F
Aluminum, Brass, Bronze	947A/984F	994F	947A	947A	947A	947A	984F	984F

Product ID	Grades	Backing	Stiff/Flexible	Pressure	Wet/Dry
947A	40+, 60+, 80+, 120+	X Wt Poly/Cotton	Flexible	Low/Medium	Dry
984F	36+, ▶ 50+, 60+, 80+ ▶ 120+	YF Wt Polyester	Stiff	Medium/High	Wet/Dry
994F	36+	Z Wt Polyester	Very Stiff	High	Wet/Dry
997F	36+	Z Wt Polyester	Very Stiff	High	Wet/Dry

New Grades

At 3M, product innovation is just the beginning

The 3M Customer Abrasive Methods (CAM) Center, located at 3M's St. Paul, Minnesota, headquarters, was established to help customers identify the most cost-effective combination of abrasives, equipment and techniques for their particular applications. At the CAM Center, evaluations are carried out under controlled, repeatable conditions using a wide array of production scale grinding, polishing and finishing equipment, as well as in our on-site research and testing laboratories.

The services of the 3M CAM Center include applications development, process optimization, operator training and other technical support. Contact your local 3M representative for more information.

Product Use: All statements, technical information and recommendations contained in this document are based on tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

Warranty and Limited Remedy: Unless stated otherwise in 3M's product literature, packaging inserts or product packaging for individual products, 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product. Individual products may have additional or different warranties as stated on product literature, package inserts or product packages. 3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's application. If the 3M product is defective within the warranty period, your exclusive remedy and 3M's and seller's sole obligation will be, at 3M's option, to replace the product or refund the purchase price.

Limitation Of Liability: Except where prohibited by law, 3M and seller will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental, or consequential regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Abrasive Systems Division

3M Center, Building 223-6N-02
St. Paul, MN 55144-1000
1-866-279-1235
www.3M.com/abrasives

Please recycle. Printed in USA.
© 3M 2015. All rights reserved. Issued: 6/15
10568HB 61-5002-8253-0

3M, Cubitron and Trizact are trademarks of 3M Company. Used under license by 3M subsidiaries and affiliates.