


## Specification Sheet

Part Number: 596-00377

Pre-Printed Signal Word labels come with the header pre-printed in colors so that only one color of ribbon is needed to complete the message panel.

Labels are pre-made to the most recent ANSI standards so that code compliance is assured.

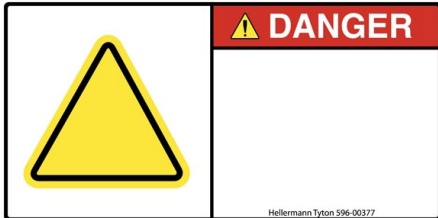

Pre-Printed Signal Panel labels can be printed using standard thermal transfer printers to reduce labor, eliminate minimum orders and allow the user to create labels on demand when needed.

Pre-Printed Header Label, DANGER, 2.75" x 5.50", PET, Red, 250/roll

**Article Number** 596-00377

**Type** DV55X275

**Color** Red (RD)

**Quantity Per** roll

**Product Description** These labels come with preprinted color headers so only one color of ribbon is needed to complete the message panel. Labels can be used with TagPrint® Pro label software and HellermannTyton thermal transfer printers to reduce labor, eliminate minimum orders and allow the user to create labels on demand.

|                                  |  |
|----------------------------------|--|
| <b>Short Description</b>         | Pre-Printed Header Label, DANGER, 2.75" x 5.50", PET, Red, 250/roll        |
| <b>Global Part Name</b>          | DV55X275-336/926-RD  |
| <b>Technical Description</b>     | Pre-Printed Header Label, DANGER, 2.75" X 5.5", Red                        |
| <b>Width W (Imperial)</b>        | 5.5  |
| <b>Width W (Metric)</b>          | 139.7  |
| <b>Thickness T (Metric)</b>      | 64.0   |
| <b>Height H (Imperial)</b>       | 2.75   |
| <b>Height H (Metric)</b>         | 69.85  |
| <b>Width of Liner (Metric)</b>   | 71.12  |
| <b>Width of Liner (Imperial)</b> | 2.80   |
| <b>Material</b>                  | Type 336/926, Polyester, UV-stabilized, clear polyester laminate (336/926) |
| <b>Material Shortcut</b>         | 336/926  |
| <b>Adhesive</b>                  | Acrylic  |
| <b>Halogen Free</b>              | No   |

|                                       |                                   |
|---------------------------------------|-----------------------------------|
| <b>Adhesive Operating Temperature</b> | -40°F to +302°F (-40°C to +150°C) |
| <b>Operating Temperature</b>          | -40°F to +302°F (-40°C to +150°C) |
| <b>Reach Compliant (Article 33)</b>   | Yes                               |
| <b>ROHS Compliant</b>                 | Yes                               |
| <b>Certification/Specification</b>    | NEC2020 NEC2011 NEC2014 NEC2017   |
| <b>UL Recognized (US)</b>             | Yes                               |
| <b>Package Quantity (Imperial)</b>    | 250                               |
| <b>Package Quantity (Metric)</b>      | 250                               |
| <b>Customs Number</b>                 | 3919102055                        |
| <b>Labels per Column</b>              | 1                                 |
| <b>Labels per Row</b>                 | 1                                 |