


# Female Disconnects - Vinyl Insulated Butted Seam



Product Number†	UPC (054007-)	Wire Range (AWG)**	Mates with	L	Barrel Length	Barrel I.D.	Maximum Insulation Diameter	Terminals per:	
			Male Tab Width(W) x Thickness					Carton	Case
MVU18-187DFK	02368	22-18	0.187 x 0.020	0.78	0.25	0.085	0.145	—	1000
MVU18-250DFX	11820	22-18	0.250 x 0.032	0.87	0.25	0.080	0.145	100	500
MVU18-250DFK	01301	22-18	0.250 x 0.032	0.87	0.25	0.080	0.145	—	1000
MVU14-110DFX*	22856	16-14	0.110 x 0.020	0.81	0.19	0.115	0.145	100	500
MVU14-110DFK*	01775	16-14	0.110 x 0.020	0.81	0.19	0.115	0.145	—	1000
MVU14-187DFX	22872	16-14	0.187 x 0.020	0.78	0.25	0.085	0.145	100	500
MVU14-187DFK	01776	16-14	0.187 x 0.020	0.78	0.25	0.085	0.145	—	1000
MVU14-250DFX	22880	16-14	0.250 x 0.032	0.87	0.25	0.080	0.145	100	500
MVU14-250DFK	01777	16-14	0.250 x 0.032	0.87	0.25	0.080	0.145	—	1000
MVU10-375DFK*	02055	12-10	0.375 x 0.050	1.23	0.25	0.175	0.250	—	500

\* Not ULListed or CSA Certified

\*\* For #10-12 AWG, MVU10-250DF has been substituted with MVI10-250DF.

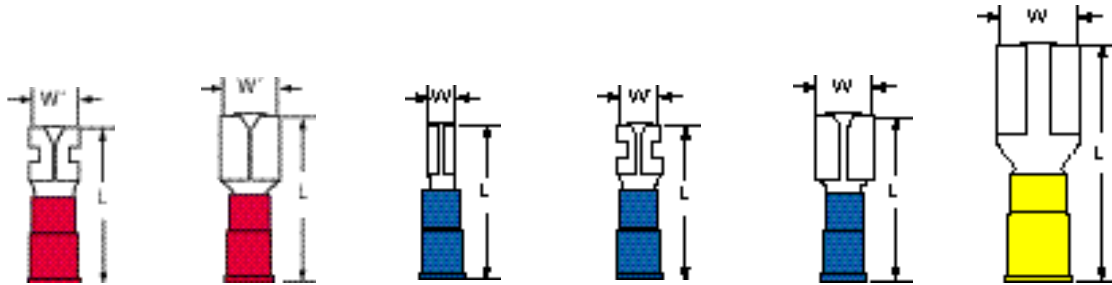

Wire Range	MVU18-187DF	MVU18-250DF	MVU14-110DF	MVU14-187DF	MVU14-250DF	MVU10-375DF
Suggested Mate	22-18 MVU18-187DM	22-18 MVU18-250DM	16-14 0.110 Male Tab	16-14 MVU14-187DM	16-14 MVU14-250DM	12-10 0.375 Male Tab