

## Han 10Ex UL-HBM-DL

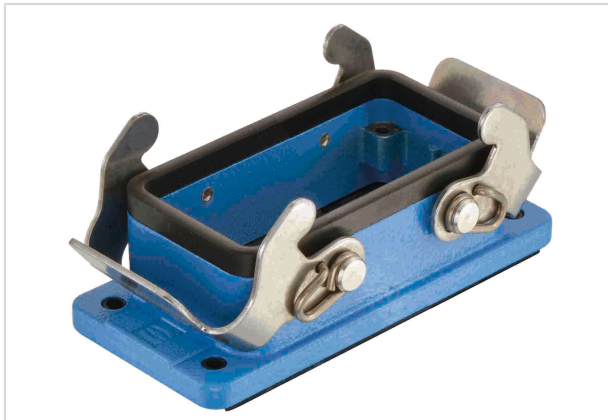


Image is for illustration purposes only. Please refer to product description.

|                    |                                                                                       |
|--------------------|---------------------------------------------------------------------------------------|
| Part number        | 09 36 510 1301                                                                        |
| Specification      | Han 10Ex UL-HBM-DL                                                                    |
| HARTING eCatalogue | <a href="https://b2b.harting.com/09365101301">https://b2b.harting.com/09365101301</a> |

### Identification

|                          |                          |
|--------------------------|--------------------------|
| Category                 | Hoods/Housings           |
| Series of hoods/housings | Han <sup>®</sup> Ex      |
| Type of hood/housing     | Bulkhead mounted housing |

### Version

|                      |                                                              |
|----------------------|--------------------------------------------------------------|
| Size                 | 10 B                                                         |
| Locking type         | Double locking lever                                         |
| Field of application | Connectors for explosion hazardous environments              |
| Details              | for US purposes only                                         |
| Details              | ATTENTION! Only to be used with Han <sup>®</sup> Ex inserts! |

### Technical characteristics

|                                        |                       |
|----------------------------------------|-----------------------|
| Limiting temperature                   | -20 ... +40 °C        |
| Degree of protection acc. to IEC 60529 | IP65 With cable gland |

### Material properties

|                         |                     |
|-------------------------|---------------------|
| Material (hood/housing) | Zinc die-cast       |
| Surface (hood/housing)  | Powder-coated       |
| Colour (hood/housing)   | RAL 5015 (sky blue) |
| Material (seal)         | NBR                 |
| Material (locking)      | Stainless steel     |
| RoHS                    | compliant           |
| ELV status              | compliant           |



Pushing Performance

## Material properties

|                                      |               |
|--------------------------------------|---------------|
| China RoHS                           | e             |
| REACH Annex XVII substances          | Not contained |
| REACH ANNEX XIV substances           | Not contained |
| REACH SVHC substances                | Not contained |
| California Proposition 65 substances | Yes           |
| California Proposition 65 substances | Nickel        |
|                                      | Lead          |
|                                      | Naphthalene   |

## Commercial data

|                                |                                          |
|--------------------------------|------------------------------------------|
| Packaging size                 | 1                                        |
| Net weight                     | 246.6 g                                  |
| Country of origin              | China                                    |
| European customs tariff number | 85389099                                 |
| eCl@ss                         | 27440202 Shell for industrial connectors |