

Han-Eco Mod.16-C-f. HCC-cord, loop

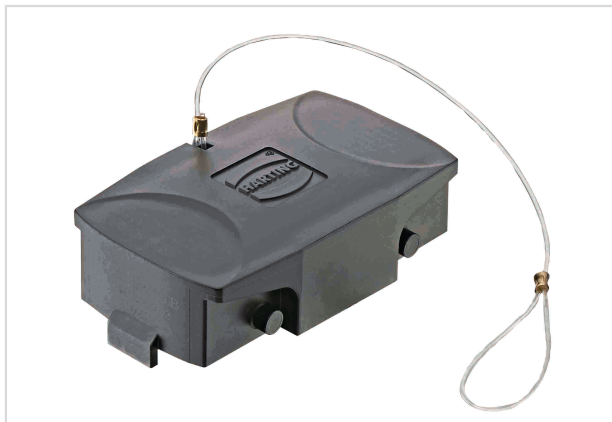


Image is for illustration purposes only. Please refer to product description.

Part number	19 41 016 5402
Specification	Han-Eco Mod.16-C-f. HCC-cord, loop
HARTING eCatalogue	https://b2b.harting.com/19410165402

Identification

Category	Hoods/Housings
Series of hoods/housings	Han-Eco® Modular
Type of hood/housing	Protection cover
Description of hood/housing	for bulkhead mounted housings for surface mounted housings for cable to cable housing With fixing cord (loop)

Version

Size	16 B
Locking type	Double locking lever

Technical characteristics

Limiting temperature	-40 ... +125 °C
Number of relockings	≥500
Degree of protection acc. to IEC 60529	IP65

Material properties

Material (hood/housing)	Polyamide (PA) Fibre-glass reinforced
Colour (hood/housing)	RAL 9005 (jet black)
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant



Pushing Performance

Material properties

China RoHS	e
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	No
California Proposition 65 substances	Yes
California Proposition 65 substances	Nickel Lead

Specifications and approvals

Specifications	IEC 61984
	EN 45545-2 R22: HL1, HL2, HL3
	EN 45545-2 R23: HL1, HL2, HL3
	EN 45545-2 R24: HL1, HL2, HL3
UL / CSA	UL 1977 ECBT2.E235076
	CSA-C22.2 No. 182.3 ECBT8.E235076

Commercial data

Packaging size	1
Net weight	60.6 g
Country of origin	Germany
European customs tariff number	85389099
eCl@ss	27440208 Cap for industrial connectors