



Connector Location A


Connector Location B

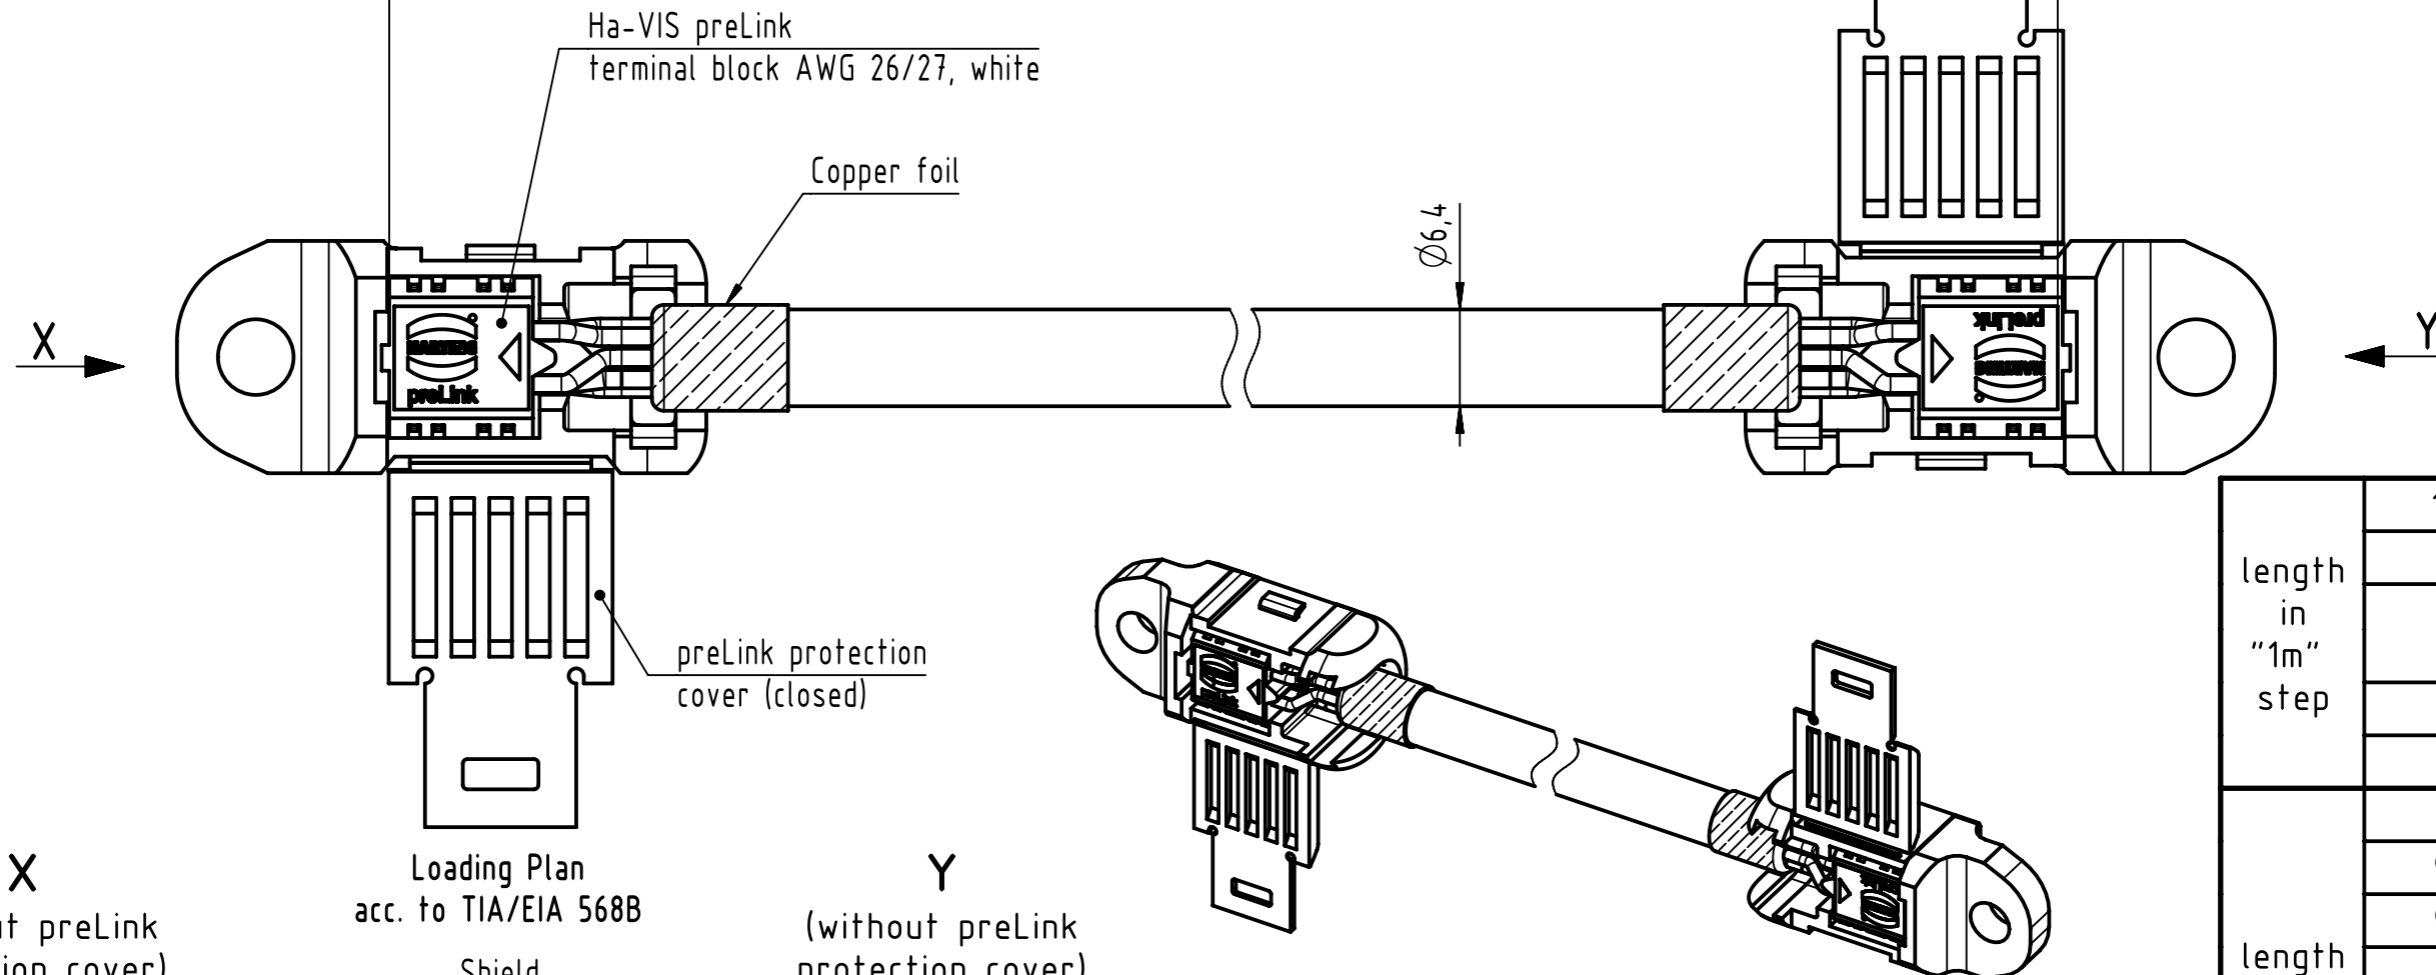

X
(without preLink protection cover)

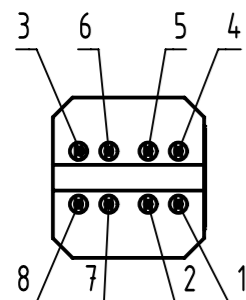

Y
(without preLink protection cover)

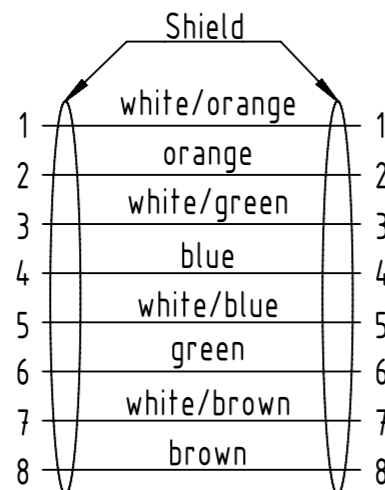

- Protection level: IP20
- Temperature range:
 - Fixed installation: -30°C ... +75°C
 - Dynamic installation: -5°C ... +50°C

length in "1m" step	100	XXX=000
	99	XXX=990
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	a [m]	XXX

6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

4x2xAWG 26/7, S/FTP, PUR, Cat.7, yellow	20826002XXX
Type of cable	Part no.

All rights reserved Department HCS - RO HARTING Customised Solutions D-32339 Espelkamp	All Dimensions in mm Tech. Character. Free size tol. According to production drawing	Created by BANCIUD Banciu Title 2x preLink Cable 4x2xAWG26/7 Cat.6A	Inspected by 402676 Gross Standardisation MUNTEANV Muntean Date 2020-11-20	State Final Release	Doc-Key / ECM-Nr. 100209218/UGD/005/E 500000183773
	Type TB	Number 20826002XXX	Rev. E	Page 1/1	