


## Specification Sheet

Part Number: TAG73T1-795

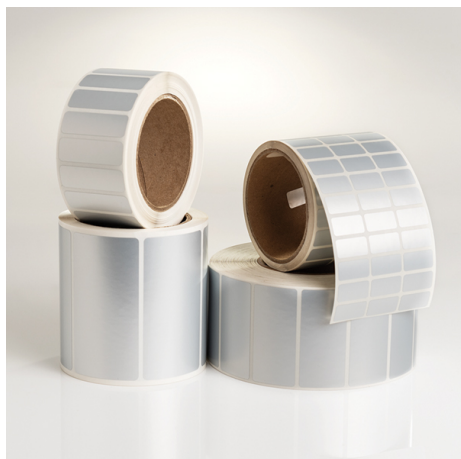

Metalized polyester has a matte finish, allowing for the highest resolution and print contrast.

The acrylic-based adhesive bonds to a wide variety of substrates and can withstand high temperatures long term.

Thermal Transfer Labels, 2.0" x 1.0", 1 Across, Polyester, Silver, 3000/roll

**Article Number** 596-73795

**Type** TAG73T1

**Color** Silver (SR)

**Quantity Per** roll

**Product Description** HellermannTyton's metalized polyester labels include a layer of metallic particles that give the appearance of being made of metal. Applications include asset tracking and product rating plates. The high operating temperature makes them suitable for use on electronic equipment. Great for replacing expensive metal stampings, engravings and even silk screened rating plates, the printed labels offer high quality imaging for text and graphics and can be permanently placed on a wide variety of flat surfaces.

<b>Short Description</b>	Thermal Transfer Labels, 2.0" x 1.0", 1 Across, Polyester, Silver, 3000/roll
<b>Global Part Name</b>	TAG73T1-795-SR
<b>Width W (Imperial)</b>	2.0
<b>Width W (Metric)</b>	50.8
<b>Thickness T (Metric)</b>	64.0
<b>Height H (Imperial)</b>	1.0
<b>Height H (Metric)</b>	25.4
<b>Width of Liner (Metric)</b>	55.83
<b>Width of Liner (Imperial)</b>	2.20
<b>Material</b>	Type 795, Polyester (795)
<b>Material Shortcut</b>	795
<b>Adhesive</b>	Acrylic
<b>Halogen Free</b>	No
<b>Adhesive Operating Temperature</b>	-40°F to +302°F (-40°C to +150°C)

<b>Operating Temperature</b>	-67°F to +302°F (-55°C to +150°C)
<b>Reach Compliant (Article 33)</b>	Yes
<b>ROHS Compliant</b>	Yes
<b>Certification/Specification</b>	UL-Recognized
<b>UL Recognized (US)</b>	Yes
<b>UL Recognized (US and Canada)</b>	Yes
<b>Package Quantity (Imperial)</b>	3000
<b>Package Quantity (Metric)</b>	3000
<b>Customs Number</b>	3919102055
<b>Labels per Column</b>	1
<b>Labels per Row</b>	1