
DESCRIPTION: MACHINED MICRO-D // SOLDER CUP // FEMALE

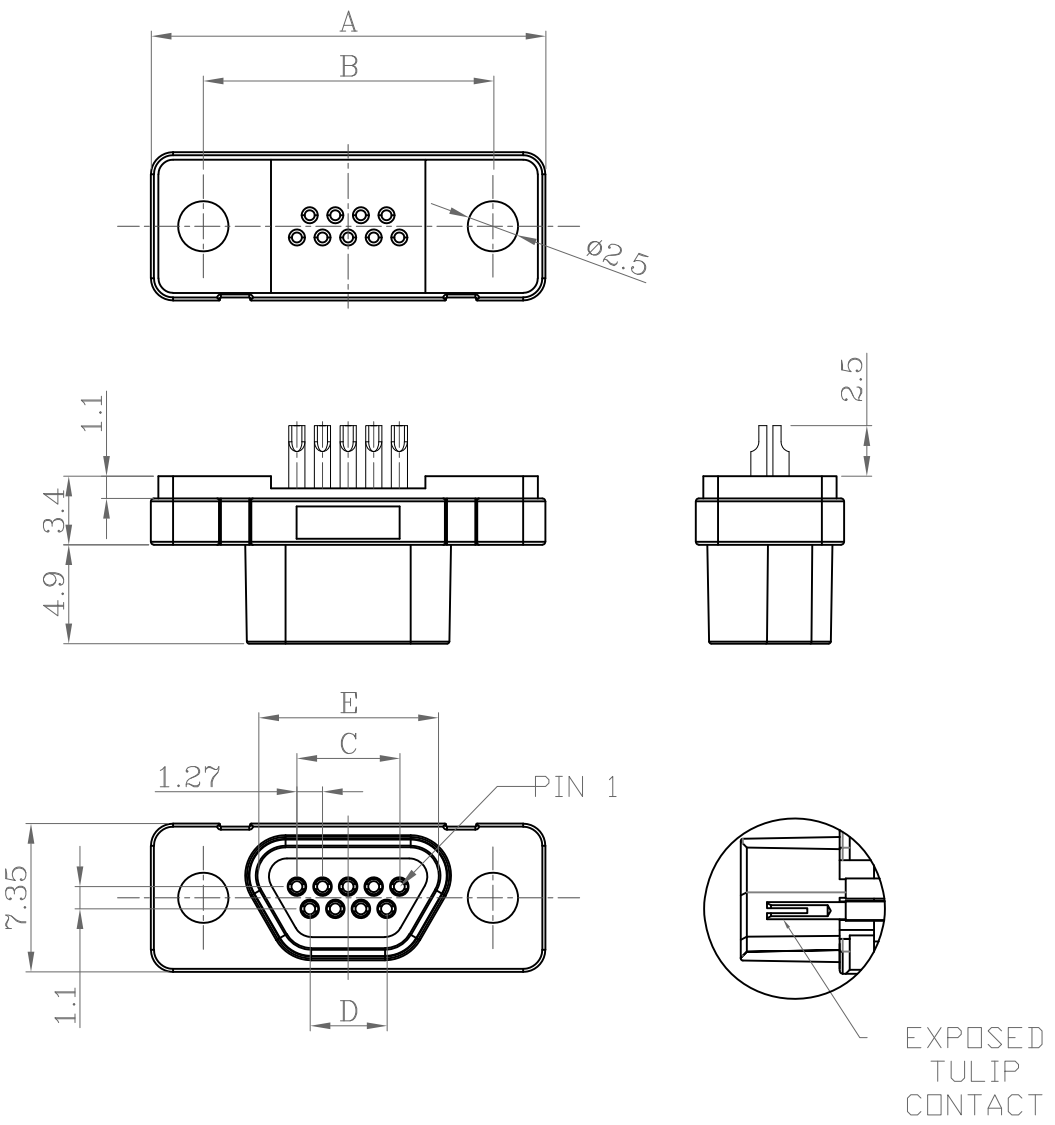

NOTE:

MATERIAL	
INSULATOR	LCP UL94V-0, BLACK
CONTACT	BRASS, 15u" GOLD PLATING
SHELL	ZINC ALLOY, NICKEL 60u"-100u"
ELECTRICAL	
RATED CURRENT	2A
VOLTAGE	60VDC
INSULATOR RESISTANCE	1000 MOhms MIN.
CONTACT RESISTANCE	30 mOhms MAX.
WIRE AWG	26 AWG MAX
ENVIRONMENT	
OPERATION TEMPERATURE	-40°C TO +125°C

**NOT DESIGNED TO MATE WITH NORCOMP 380 // 381 // 960 SERIES & NORCOMP MICRO-D CABLE ASSEMBLIES USING THE 960 SERIES CONNECTORS. IF ANY QUESTIONS PLEASE CONTACT ENG@NORCOMP.NET

DIMENSIONS(mm)					
SIZE	A	B	C	D	E
9	19.55	14.35	5.08	3.81	8.90
15	23.36	18.20	8.89	7.62	12.60
25	29.70	24.55	15.24	13.97	19.20

580-MYY-203L001

SERIES
580 = MACHINED MICRO-D
MACHINED
POSITIONS
09
15
25
GENDER
1 = FEMALE - "TULIP" CONTACTS
SOLDER CUP TERMINATION
CONTACT PLATING OPTIONS
1 = 15u" GOLD PLATING
2 = 30u" GOLD PLATING

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: J. KADEL

DATE: 05/12/2020

TOLERANCES
.x ±0.20
.xx ±0.10
.xxx ±0.05
.xxxx ±0.03
ANGULAR ±1°

NorComp

SCALE: NTS

SHEET 1 OF 1

REV 2

DWG NO. 580-MYY-203L001