
DESCRIPTION: M5 - FEMALE TO FEMALE - 3 POSITION - CABLE ASSEMBLY

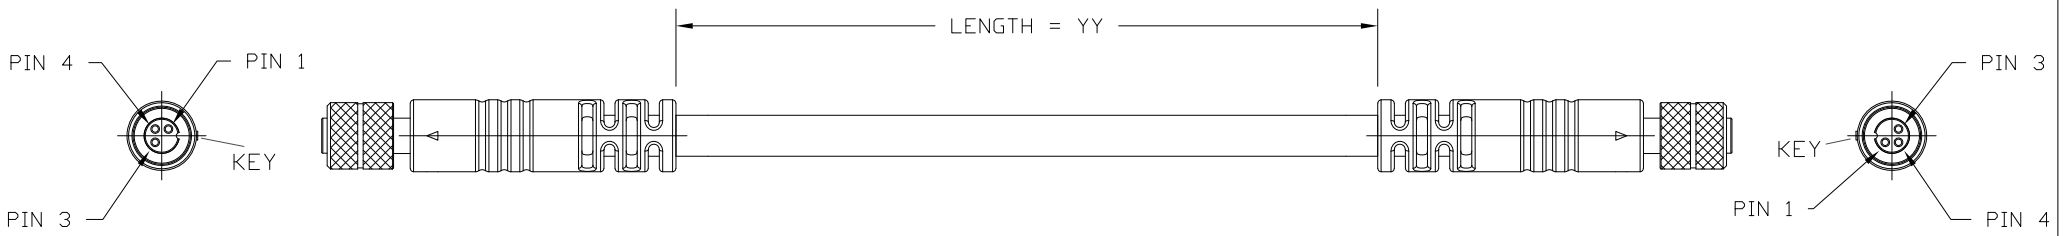


CONNECTOR 1

CONNECTOR 2

1. CONNECTOR 1 : 850-003-203RSS4, MOLDED STRAIGHT HOOD, COLOR BLACK
2. CONNECTOR 2 : 850-003-203RSS4, MOLDED STRAIGHT HOOD, COLOR BLACK
3. WIRE : 28AWG, 2 TWISTED PAIRS, UL20276, FOIL/BRAID/DRAIN WIRE SHIELD, COLOR BLACK, 30V
4. CABLE DIAMETER : 3.70mm±0.15
5. PIN OUT :

WIRING SCHEMATIC

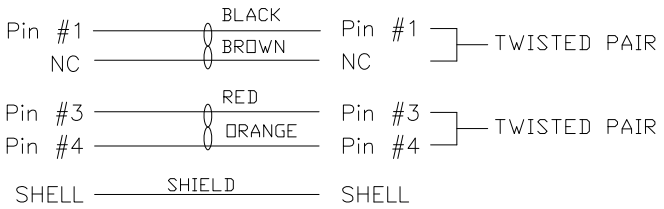

CCA-000-MYYR234

- 01 = 1 METER
- 02 = 2 METERS
- 03 = 3 METERS

**SEE PAGE 3 FOR CABLE SPECIFICATIONS

RoHS COMPLIANT


UNITS = mm

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:	DATE:		SCALE:	SHEET OF	REV
M. SIGMON	09-25-15	NorComp	NTS	1 3	2
			DWG NO.	CCA-000-MYYR234	

DESCRIPTION: M5 - FEMALE TO FEMALE - 3 POSITION - CABLE ASSEMBLY

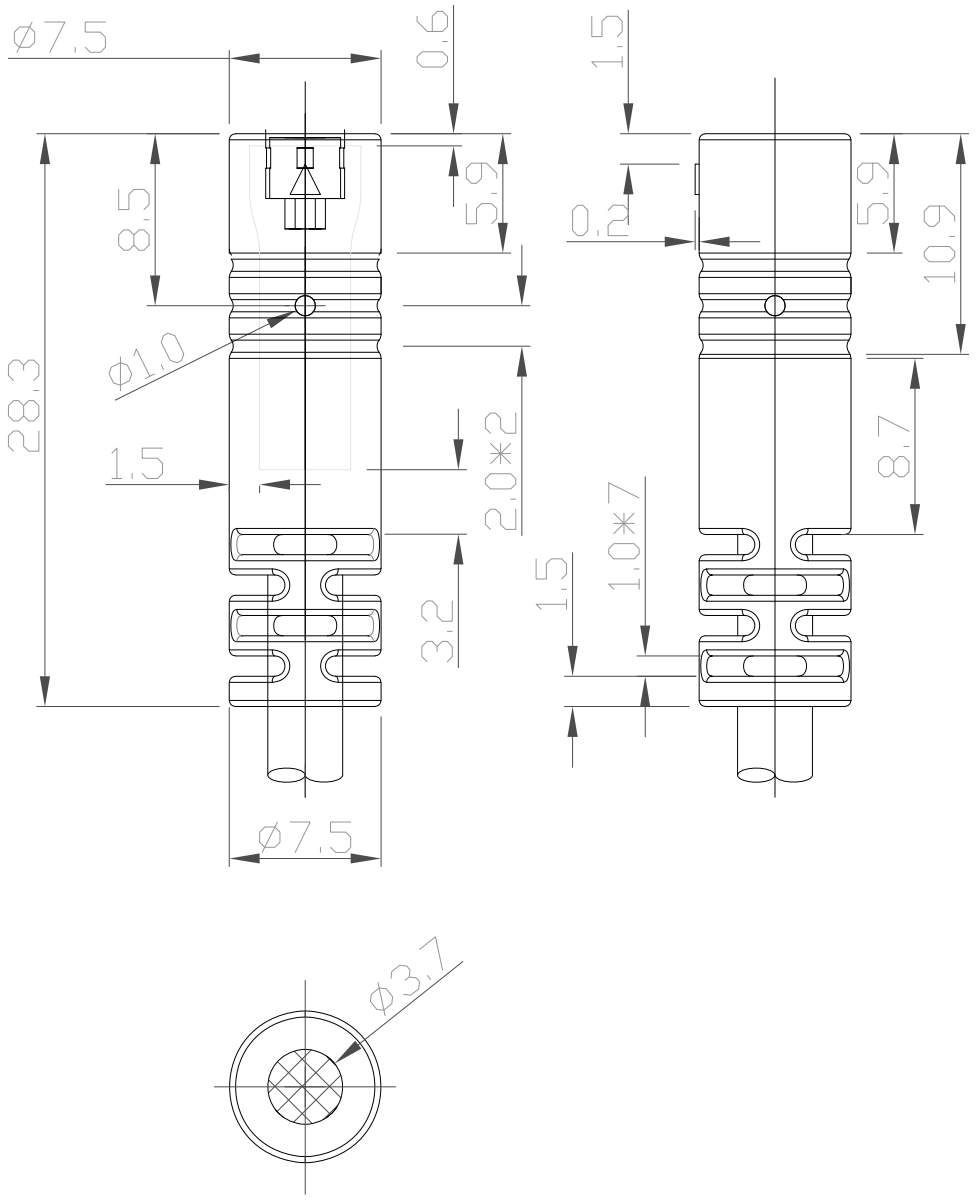

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.


DRAWN:	DATE:		SCALE:	SHEET	OF	REV
M. SIGMON	09-25-15	NorComp	NTS	2	3	2

DWG NO. CCA-000-MYYR234

DESCRIPTION: M5 - FEMALE TO FEMALE - 3 POSITION - CABLE ASSEMBLY

ELECTRICAL CHARACTERISTICS

VOLTAGE RATING :	30V
TEMPERATURE RATING :	80°C
SPARK TEST :	AC-500V/0.15 sec MIN.
DIELECTRIC STRENGTH :	AC-750V/1 sec MIN.
INSULATION RESISTANCE :	SR-PVC: DC-500V 10 MΩHM/KM MIN. AT 20°C
CONDUCTOR RESISTANCE :	28AWG-244 ΩHM/KM MAX. AT 25°C

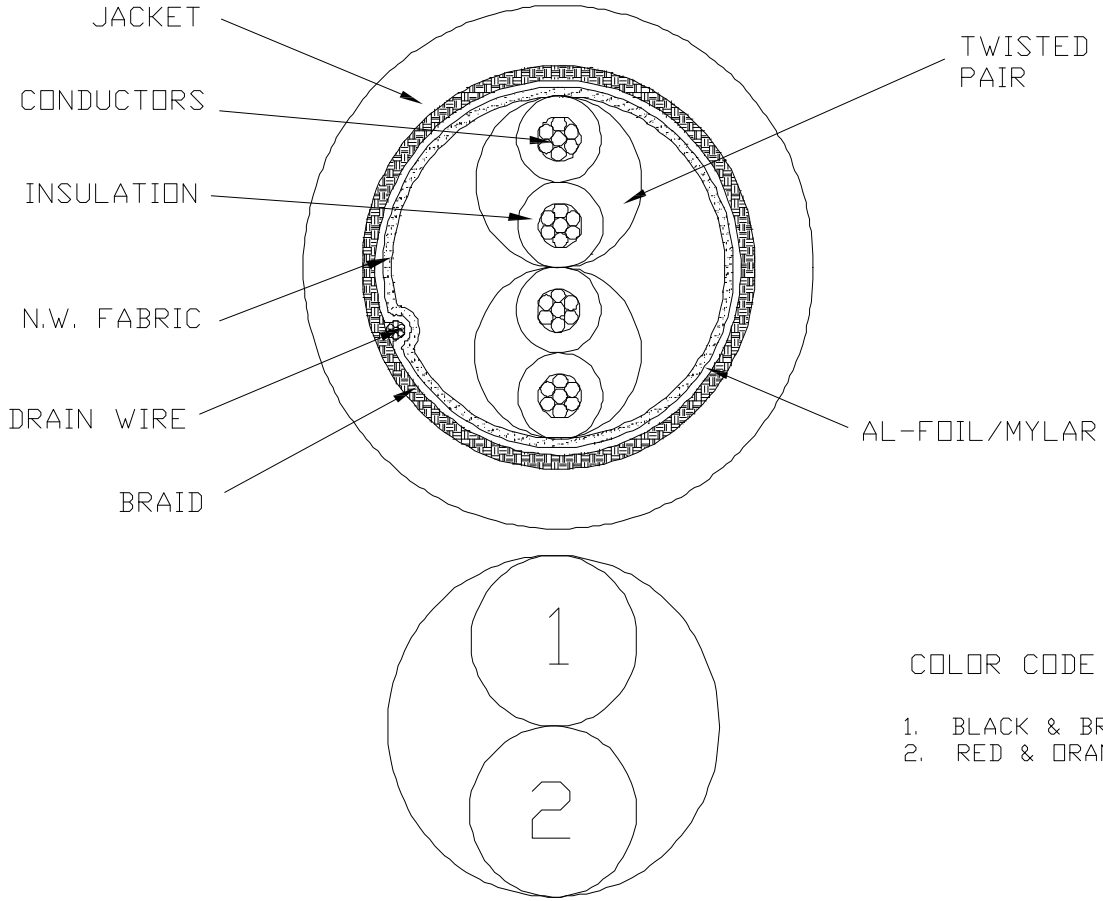

COLOR CODE

1. BLACK & BROWN (P570 & P571)
2. RED & ORANGE (P572 & P573)

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:	DATE:		SCALE:	SHEET OF	REV
M. SIGMON	09-25-15	NorComp	NTS	3 3	2
			DWG NO.	CCA-000-MYYR234	