

Ŧ	۵ D	п –	m	0



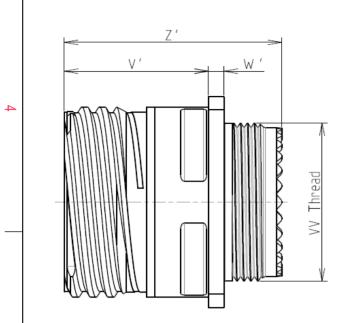



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +200°C			

: 2000 hours

8D 0

G

13

Μ

03


А


F

С

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M18x1-6g		

Е



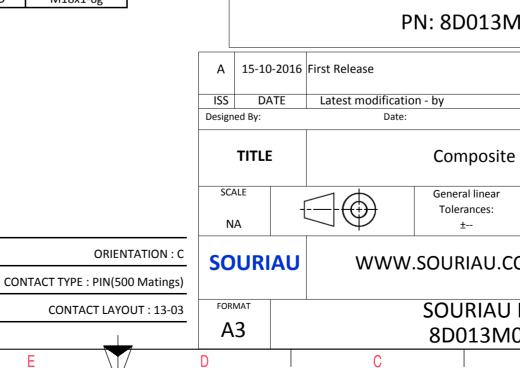

σ	Þ			
			4	
S EXAMPLE			3	
any non-conformits which does not co er of the Parties or I adation, technical n untry Jurisc TR BMO3AC	mply with by a third party		2	
		1		
	CUSTOMER DRAWING	MOD N°		
site Receptacle 8D series				
ar	NPRDS / PROJECT 859			
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
UDRG N° SHEET MO3AC-C 1/2				
M03AC-C	A	±/ £	J	
-	· · · · · · · · · · · · · · · · · · ·			

-	Ŧ	۵	гт —	m	D	0	
		Contact Layout				SQUARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	Panel Cuto
4		3#16			ب ۷		
	Ctc A B C	13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47			<u>+</u>	[Δ _Δ Dim
ω						Ç	ØA ØAA R1 ØT
	-					SOURIAU shall not I due to a use of t the Specifications issu (professional	he Products w ued by either c I recommenda
N						PN:	Count FR 8D0131
					A 15-10-2 ISS DATE Designed By:	016 First Release E Latest modification - I Date:	by
-					SCALE NA		Composit General linear Tolerances: ±
					SOURIA		
					FORMAT A3	3	OURIAL 8D013N
	Н	G	F F	E	D	C	

