

—	G	нт – – – – – – – – – – – – – – – – – – –	m	D	O O



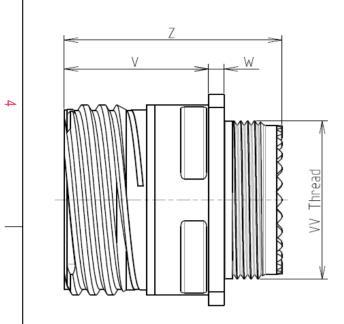

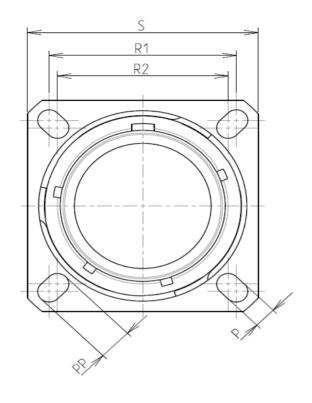

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 17

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium	
-Shell Plating	: Black Zinc Nickel	
-Insulator	: Thermoplastic	
-Contacts	: Copper Alloy	
-Seals & Grommet	: Silicon Elastomer	
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum	
-Durability	: 500 Mating cycles	
-Delivered with Souriau contacts and Accessories		
-Temperature Range	- 65℃ to +175℃	
-Salt Spray	: 500 hours	

: 35.93 g ± 10%

8D 0

G

17

Ζ

08

В

F

Е


Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
PP	4.93±0.2	
R1	26.97	
R2	24.61	
S	33.3±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M25x1-6g	


ORIENTATION : E

CONTACT LAYOUT : 17-08

CONTACT TYPE : SOCKET(500 Matings)

Е



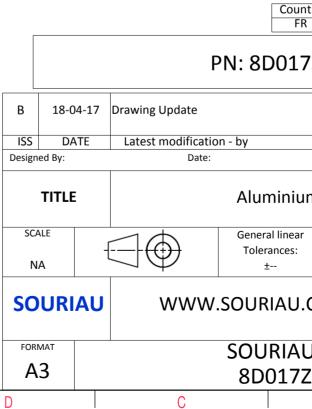

	4			
	4			
	4			
	4			
	4			
	4			
NAME OF A DESCRIPTION OF A DESCRIPTION OF A DESCRIPTION O				
IS EXAMPLE	3			
any non-conformity or damage which does not comply with				
er of the Parties or by a third party				
idation, technical notice.)				
Intry Jurisdiction & Control List	2			
	2			
7Z08BE				
I I I				
MOD N°	—			
CUSTOMER DRAWING				
customer drawing um Receptacle 8D series				
customer DRAWING um Receptacle 8D series ar NPRDS / PROJECT				
customer drawing um Receptacle 8D series	1			
CUSTOMER DRAWING um Receptacle 8D series ar NPRDS / PROJECT 859 This document is the property of SOURIAU SOURIAU it must not be reproduced or	1			
CUSTOMER DRAWING um Receptacle 8D series ar NPRDS / PROJECT 859 This document is the property of SOURIAU SOURIAU it must not be reproduced or communicated without permission	1			
CUSTOMER DRAWING um Receptacle 8D series ar NPRDS / PROJECT 859 J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission VU DRG N°	1			
CUSTOMER DRAWING um Receptacle 8D series ar NPRDS / PROJECT 859 This document is the property of SOURIAU SOURIAU it must not be reproduced or communicated without permission	1			

		۵	гт –	m		0	
		Contact Layout					Panel Cutor
4	-x ($ \begin{array}{c} $			τ <u>ε</u>	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
_	Conta position A B C C D	Contacts (insert arrangement 17-8) ct 1DD Location X-axis (mm) Y-axis (mm) +.000 (0.00) +.236 (5.99) +.128 (3.25) +.086 (2.18) +.230 (5.84) 078 (1.98) +.094 (2.39) 216 (5.49)				Max. thickness panel for receptacle: Ty	_Ø⊺ ype 0: front mot
ω	size no. cor	094 (2.39) 216 (5.49) 230 (5.84) 078 (1.96) 128 (3.25) +.066 (2.18) +.000 (0.00) 052 (1.32) nber of of size contacts rating location Supersedes 8 16 II All MS20053-8				Dim ØA ØAA R1 ØT	A
						SOURIAU shall not be li due to a use of the F the Specifications issued (professional rec	Products wi by either o
N						PN: {	Countr FR 8D017
_					B 18-04-1 ISS DATE Designed By:	7 Drawing Update Latest modification - by Date:	
-					TITLE SCALE NA	Gen	uminiun neral linear olerances: ±
					SOURIA		JRIAU.C URIAU
					A3	80	D017Z
	Н	G	F	E	D	C	

