


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
09/26/14	B	REDRAWN IN AUTOCAD UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
03/03/17	C	DIM. 190.8 WAS 201.28 DIM. 27.40 WAS 29.21 DIM. 3.50 WAS 3.18	T.B.	B.S.	
04/07/17	D	UPDATED MOUNTING INSTRUCTION	T.B.	B.S.	
04/21/17	E	DIM. 4.90 WAS 5.33 DIM. 3.45 WAS 3.50	T.B.	B.S.	

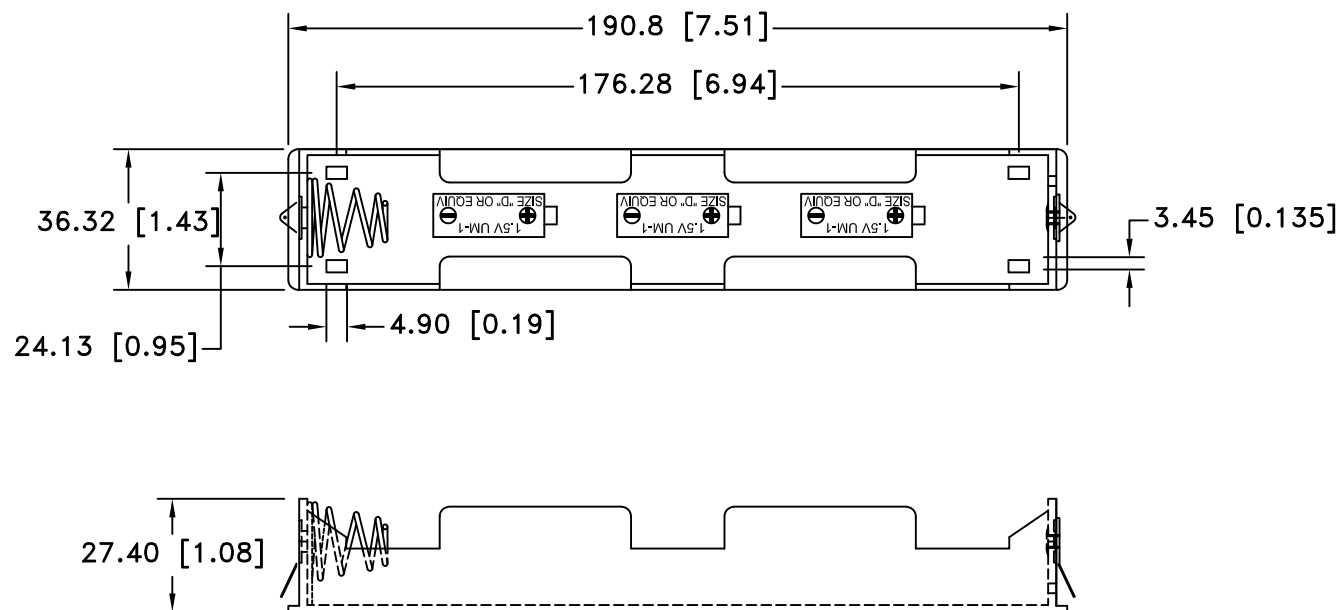

NOTES:


SPECIFICATION:

1. MATERIAL:

HOUSING : BLACK POLYPROPYLENE  
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959  
 TEMPERATURE RANGE: -10°C to +100°C  
 RIVETS: BRASS, NICKLE PLTD.  
 SPRING: SPRING STEEL, NICKLE PLTD.  
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER  
 EIA-540J000  
 ROHS 2 COMPLIANT

MOUNTING INSTRUCTION:

USE 6-32 MACHINE SCREWS.  
 ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title 3 "D" CELL HOLDER WITH SOLDER LUG		
Fractional ± .8 (.030)			
Angular ± 3°	Date 04/21/17	Drawing Number BH13DL	