


AI-3435-TF-LW140-R 34mm Indicator

3541 Stop Eight Road ● Dayton, Ohio 45414

Product Overview


- 34mm diameter, 3-28 VDC self-drive indicator
- 96 dBA minimum output (12VDC @ 10 cm) and 3,500 Hz continuous tone
- ABS housing and 140mm long 24 AWG UL1007 lead wires
- Built-on mounting tabs for quick, easy mounting

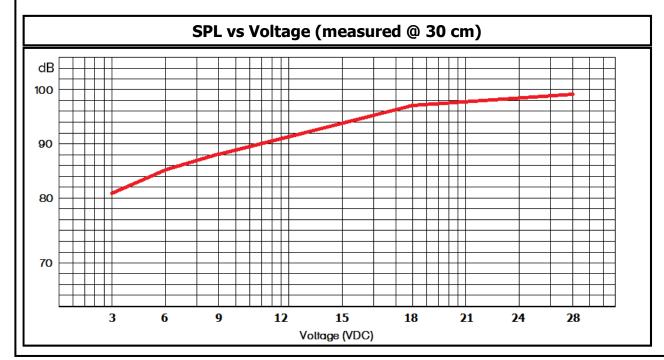








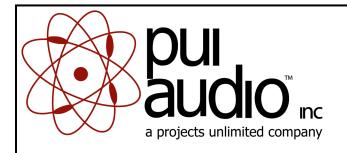

AI-3435-TF-LW140-R 34mm Indicator


Mechanical and Environment Testing			
Test Description	Test Condition		
High Temperature	+95°C (±2°C) with random humidity for 96 hours		
Low Temperature	-40°C (±2°C) with random humidity for 96 hours		
Humidity	40°C (±2°C) with 90% to 95% relative humidity for 96 hours		
Vibration	1.5 mm movement modulated at 10-55 Hz for two hours in three directions		
Drop Test	75 cm free fall onto wood board, 9 cycles		
Temperature Cycle Test	-40°C to 95°C, five 3 hour cycles		
After tests, part shall rest for 2 hours. Pa	arts are then tested for clean, pure tones.		

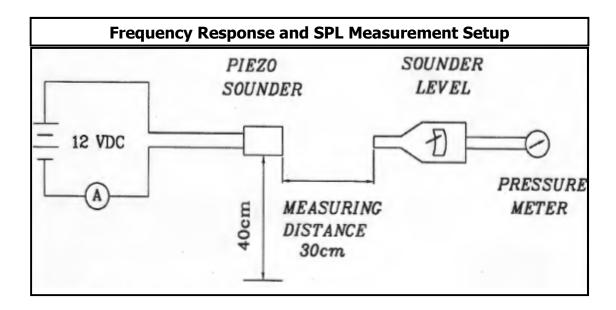


SPECIFICATIONS					
PARAMETERS	UNITS				
RATED VOLTAGE	Vdc				
OPERATING VOLTAGE RANGE	Vdc				
RATED CURRENT (MAX)	mA				
MINIMUM SPL @ 10 CM	dBA				
RESONANT FREQUENCY	Hz				
TONE OR PULSE RATE	0 pulse /sec				
OPERATING TEMPERATURE	°C				
STORAGE TEMPERATURE	°C				
HOUSING MATERIAL	-				
TERMINAL MATERIAL	-				
WEIGHT	grams				
STORAGE TEMPERATURE HOUSING MATERIAL TERMINAL MATERIAL	°C -				

THIS DOCUMENT CONTAINS DATA
PROPRIETARY TO PROJECTS UNLIMITED, INC.
ANY USE OR REPRODUCTION, IN ANY FORM,
WITHOUT PRIOR WRITTEN PERMISSION OF
PROJECTS UNLIMITED, INC. IS PROHIBITED.
©2003, Projects Unlimited Inc.

		REVISION HISTORY		
].	LTR	DESCRIPTION	DATE	APPROVED
	-	RELEASED FROM ENGINEERING	8/15/2005	
•	Α	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	2/21/2008	B.R.

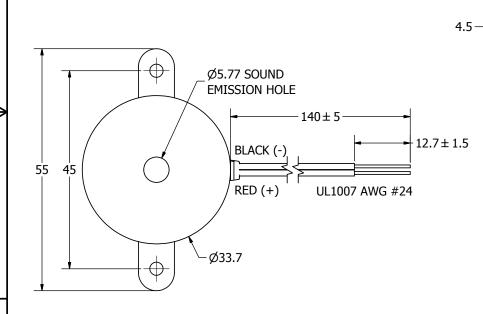

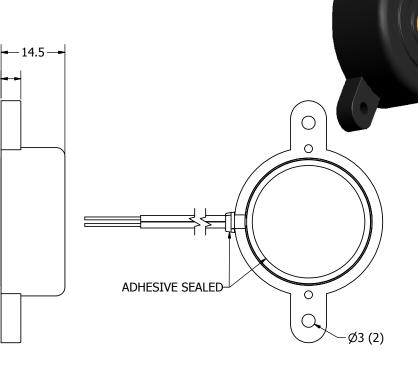

Checked by

Date

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED:		Designed by
DIMENSIONS ARE IN	SIZE	J.A.F.
MILLIMETERS,		∞
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	A 3	XXX
AI-3435-TF-L\	W140-R.idw	4

J.A.F.	8/15/2005	Е
	pul.	
	audic	" " (

Date

P. 8/16/2005 B.R. 8/16/2005 2/21/2008 AI-3435-TF-LW140-R

Approved by

Indicator Edition Sheet - 1/1

Date

Drawn Date