
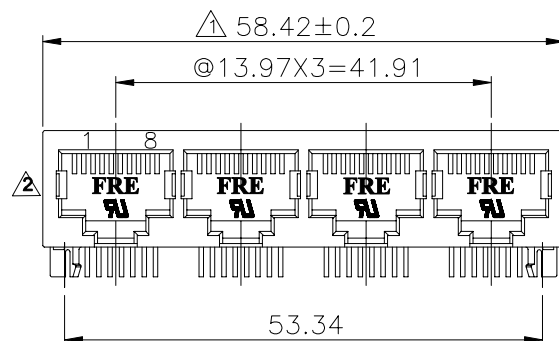
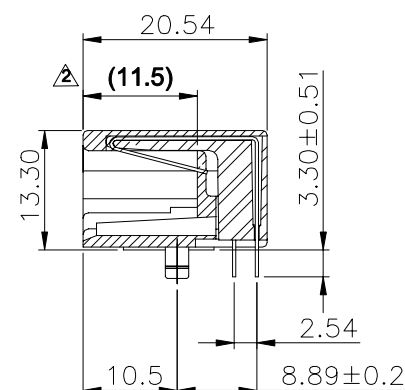
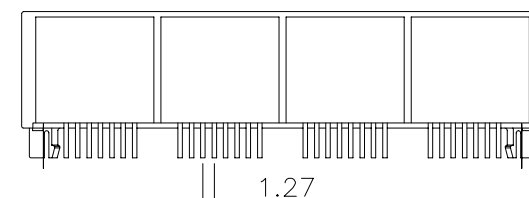


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
1		DRAWING MODIFY	JAMY 4/18/06	
2		DRAWING MODIFY	Yuan 08/01/06	

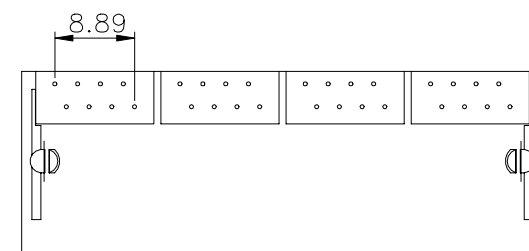

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 35 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : NYLON+G.F.30% UL94V-0.COLOR YELLOW
- CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:


- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.
- WAVE SOLDERING TEMPERATURE: 255°C TO 265°C (5~10 SECONDS).

4. RoHS COMPLIANT

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

ROHS PART NUMBER: E5908-00CL8X-L

2- 6u" 5-50u"
3-15u" 4-30u"

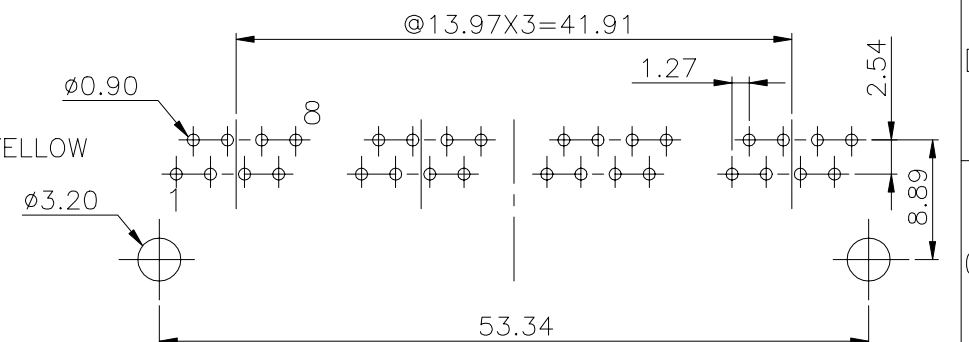

PC Board Layout Component Side Shown

DETACHED LISTS	MM (INCH)		DFTO JAMY	DATE 10/17/05	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED		CHKD ANKUE	DATE 2006/8/3		
	MM		MFO	DATE	TITLE 20.57 PCB JACK 8P	
	.0 ± 0.2		APPV LUSHENG	DATE 2006/8/3		
	.00 ± 0.15				DRAWING NO. GE593266-LA /PART NO. SEE NOTE	
	.000 ± 0.075		MATERIAL :			
	ANGLES ± 0.5		QT'Y :		SIZE	REV
	THIRD ANGLE PROJECTION		FINISH :		A3	2
			SCALE : 1.5:1		DO NOT SCALE DRAWING	
					SHEET X OF Y	