


OptoTEC™ OT Series Thermoelectric Cooler

Note: This product is not recommended for new designs.
 This product series has been replaced with the OptoTEC™ OTX Series.
 The recommended replacement is:
 MFG Part Number: 387006640
 Description: OTX08-32-F0-0707-11-W2.25

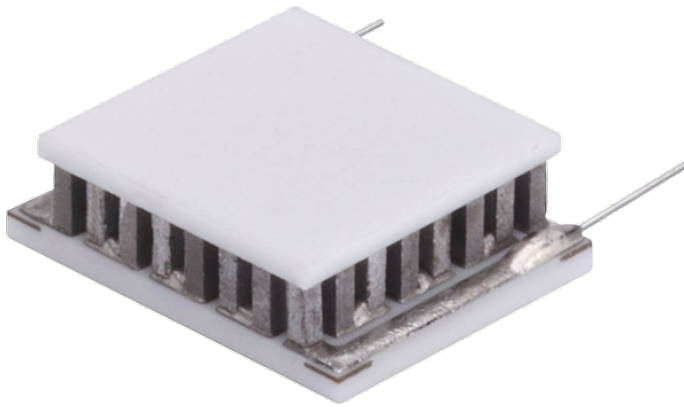


Features

- Miniature geometric sizes
- Precise temperature control
- Reliable solid-state operation
- No sound or vibration
- DC operation
- RoHS-compliant

Applications

- Thermoelectric Cooling for CMOS Sensors
- Cooling Solutions for Autonomous Systems
- Heads-Up Displays, Imaging Sensors

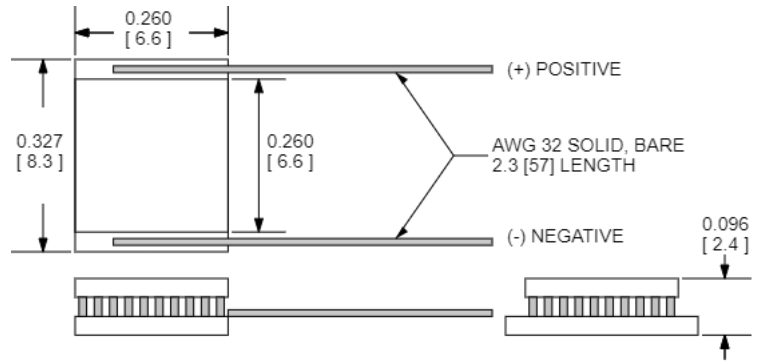


CERAMIC MATERIAL: Al₂O₃
 SOLDER CONSTRUCTION: 138°C, BiSn


INCHES [MM]

ELECTRICAL AND THERMAL PERFORMANCE


Heat Pumped at Cold Side
 Thot = 27 °C

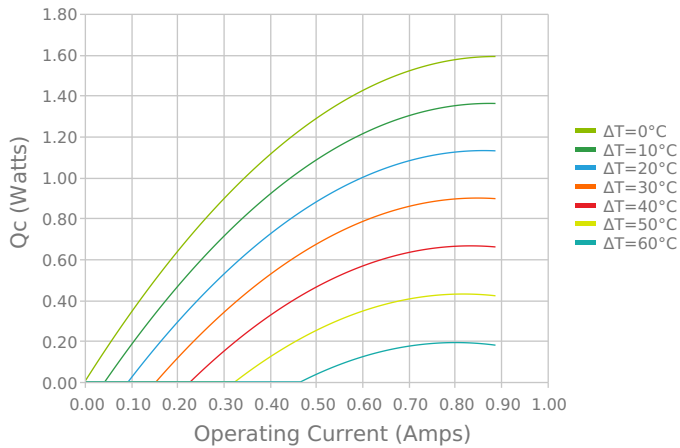


Heat Pumped at Cold Side
 Thot = 27 °C

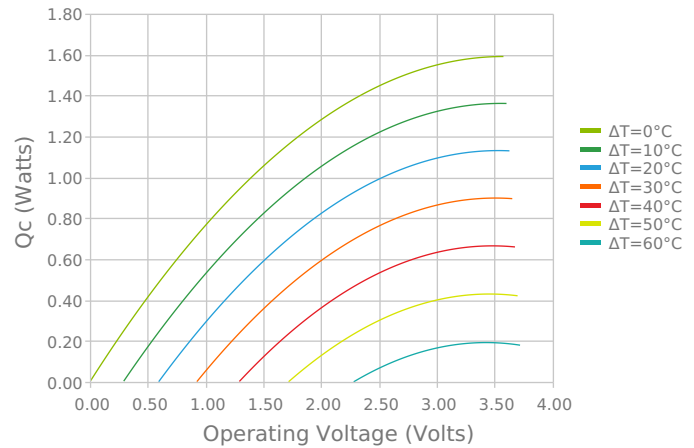


Current vs Voltage (I vs V)
 Thot = 27 °C

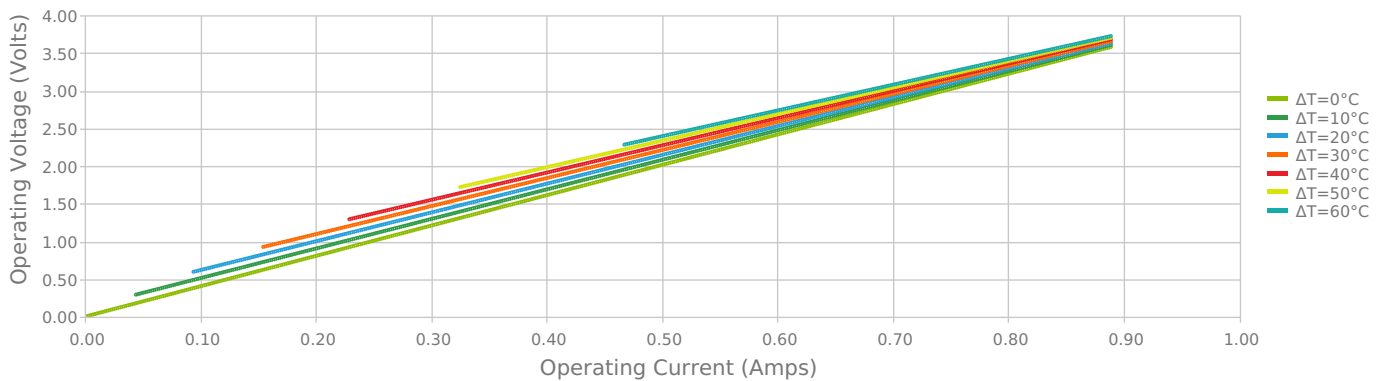


Coefficient of Performance (COP = Qc/Pin)
Thot = 27 °C

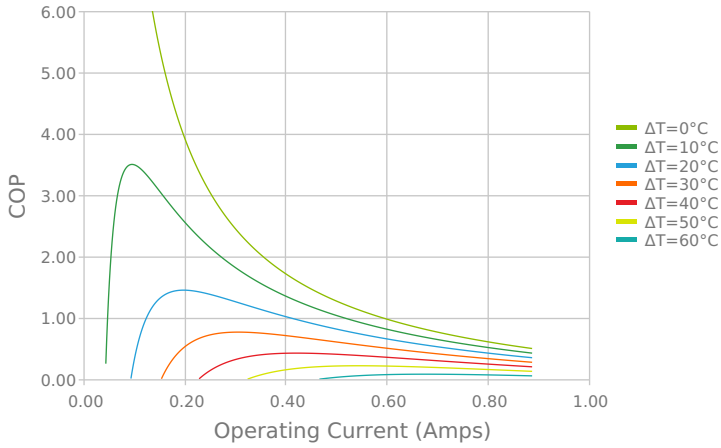


Coefficient of Performance (COP = Qc/Pin)
Thot = 27 °C

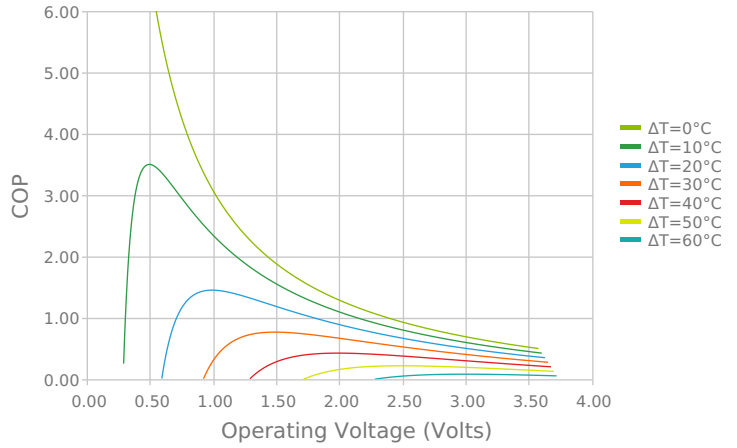


Total Heat Dissipated at Hot Side (Qh=Qc+Pin)
Thot = 27 °C

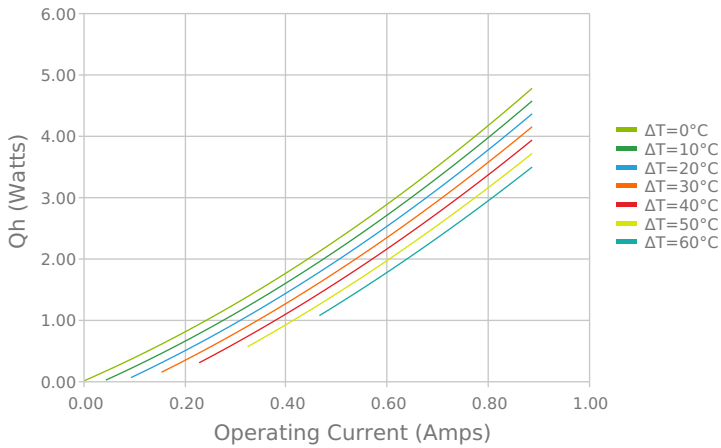


Total Heat Dissipated at Hot Side (Qh=Qc+Pin)
Thot = 27 °C

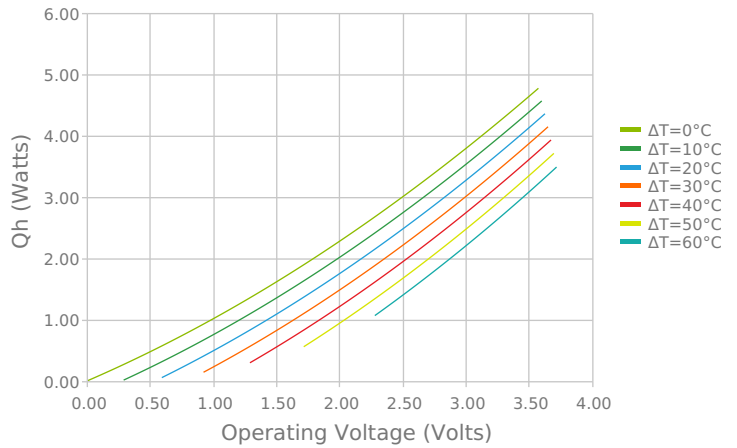

Heat Pumped at Cold Side (Qc)
Thot = 27 °C | Current = 0.7 Amps

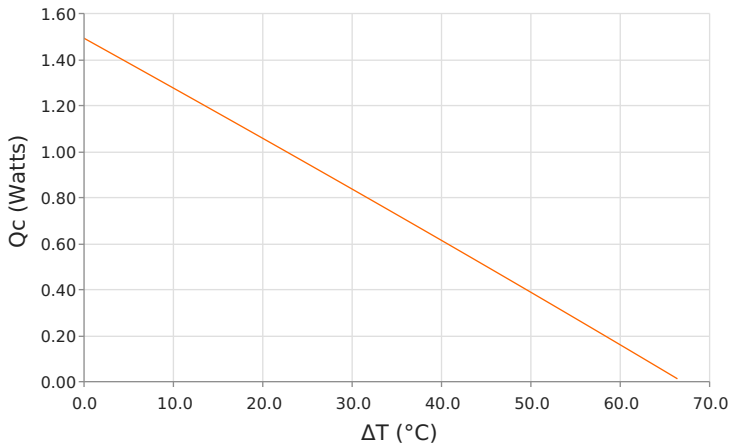

Coefficient of Performance (COP = Qc/Pin)
Thot = 27 °C | Current = 0.7 Amps

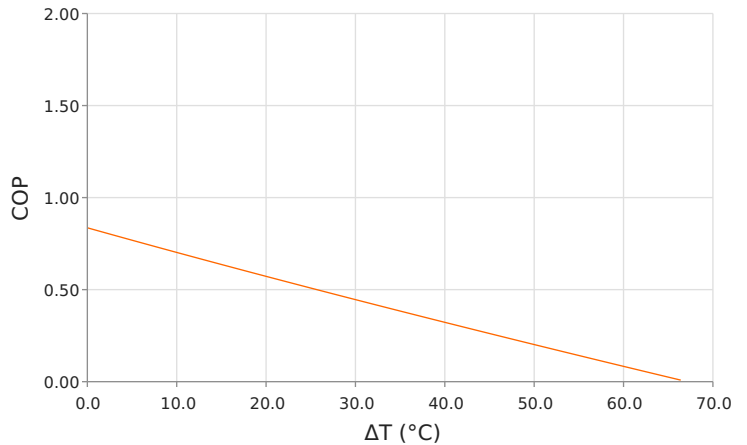

SPECIFICATIONS*

| | 27.0 °C | 35.0 °C | 50.0 °C |
|---|-------------|-----------|-----------|
| Hot Side Temperature | | | |
| Qcmax ($\Delta T = 0$) | 1.6 Watts | 1.6 Watts | 1.7 Watts |
| ΔT_{max} ($Q_c = 0$) | 68.0°C | 70.9°C | 76.0°C |
| I_{max} (I @ ΔT_{max}) | 0.8 Amps | 0.8 Amps | 0.8 Amps |
| V_{max} (V @ ΔT_{max}) | 3.4 Volts | 3.5 Volts | 3.8 Volts |
| Module Resistance | 4.03 Ohms | 4.19 Ohms | 4.51 Ohms |
| Max Operating Temperature | 80 °C | | |
| Weight | 1.0 gram(s) | | |

* Specifications reflect thermoelectric coefficients updated March 2020

FINISHING OPTIONS

| Suffix | Thickness | Flatness / Parallelism | Hot Face | Cold Face | Lead Length |
|--------|--------------------------------------|--|----------|-----------|--------------------|
| 11 | 2.438 ±0.127 mm 0.096 ± 0.0050 in | 0.051 mm / 0.051 mm 0.002 in / 0.002 in | Lapped | Lapped | 50.8 mm 2.00 in |

SEALING OPTIONS

| Suffix | Sealant | Color | Temp Range | Description |
|--------|---------|-------|------------|----------------------|
| | None | | | No sealing specified |

NOTES

1. Max operating temperature: 80°C
2. Do not exceed I_{max} or V_{max} when operating module
3. Reference assembly guidelines for recommended installation
4. Solder tinning also available on metallized ceramics

Any information furnished by Laird and its agents, whether in specifications, data sheets, product catalogues or otherwise, is believed to be (but is not warranted as being) accurate and reliable, is provided for information only and does not form part of any contract with Laird. All specifications are subject to change without notice. Laird assumes no responsibility and disclaims all liability for losses or damages resulting from use of or reliance on this information. All Laird products are sold subject to the Laird Terms and Conditions of sale (including Laird's limited warranty) in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2019-2021 Laird Thermal Systems, Inc. All rights reserved. Laird™, the Laird Ring Logo, and Laird Thermal Systems™ are trademarks or registered trademarks of Laird Limited or its subsidiaries.

OptoTEC™ is a trademark of Laird Thermal Systems, Inc. All other marks are owned by their respective owners.

Date: 01/08/2022