

MIL-STD-1553 Transformers

Low profile 3.3V Pulse Transformers

Ruggedized



- ⊗ Dual ratio in a single transformer package (see Schematic)
- ⊗ Weight: ≤5.0 grams
- ⊗ Applicable specifications
 - MIL-STD-1553B
 - MIL-STD-202
 - MIL-PRF-21038
 - AS9001
- ⊗ Maximum Re-flow Temperature for SMT parts: 235°C

Electrical Specifications @ 25 °C – Operating Temperature – 55 °C to +125 °C

Part Number	Terminals	Ratio (±3%)	DC Resistance (Ω MAX)	Impedance (Ω MIN)	Droop	Overshoot		CMR	Frequency Range (No Load)	IR @ 250Vdc (MIN)	DWV
						±1V	MIN				
Q1553-70	1-3:4-8	1.0CT:3.0CT	1-3 = 0.35	4-8	20%	±1V	45db	75kHz to 1MHz	10K MΩ	100 Vrms	
	1-3:5-7	1.0CT:2.15CT	4-8 = 3.50	4000	MAX	MIN	MIN				
Q1553-71	1-3:4-8	1CT:3.54CT	1-3 = 0.35	4-8	20%	±1V	45db	75kHz to 1MHz	10K MΩ	100 Vrms	
	1-3:5-7	1CT:2.50CT	4-8 = 3.50	4000	MAX	MIN	MIN				
SMQ1553-70	1-3:4-8	1.0CT:3.0CT	(1-3) 0.35	4-8	20%	±1V	45dB	75kHz to 1MHz	10K MΩ	100 Vrms	
	1-3:5-7	1.0CT:2.15CT	(4-8) 3.5	4000	max	MAX	MIN				
SMQ1553-71	1-3:4-8	1CT:3.54CT	(1-3) 0.35	4-8	20%	±1V	45dB	75kHz to 1MHz	10K MΩ	100 Vrms	
	1-3:5-7	1CT:2.50CT	(4-8) 3.5	4000	max	MAX	MIN				
GL1553-70	1-3:4-8	1.0CT:3.0CT	(1-3) 0.35	4-8	20%	±1V	45db	75kHz to 1MHz	10K MΩ	100 Vrms	
	1-3:5-7	1.0CT:2.15CT	(4-8) 3.5	4000	MAX	MIN	MIN				
GL1553-71	1-3:4-8	1CT:3.54CT	(1-3) 0.35	4-8	20%	±1V	45dB	75kHz to 1MHz	10K MΩ	100 Vrms	
	1-3:5-7	1CT:2.50CT	(4-8) 3.5	4000	max	MAX	MIN				
DGL1553-70	1-3:1613/5-7:12-9	1CT:3.0CT	(1-3),(5-7) 0.35	16-13&12-9	20%	±1V	45dB	75kHz to 1MHz	10K MΩ	100 Vrms	
	1-3:15-14/5-7:11-10	1CT:2.15CT	(16-13),(12-9) 3.5	4000	max	MAX	MIN				
DGL1553-71	1-3:1613/5-7:12-9	1CT:3.54CT	(1-3),(5-7) 0.35	16-13&12-9	20%	±1V	45dB	75kHz to 1MHz	10K MΩ	100 Vrms	
	1-3:15-14/5-7:11-10	1CT:2.50CT	(16-13),(12-9) 3.5	4000	max	MAX	MIN				



MIL-STD-1553 Transformers

Low profile 3.3V Pulse Transformers



Ruggedized



Mechanical

Electrical Schematic

Q1553

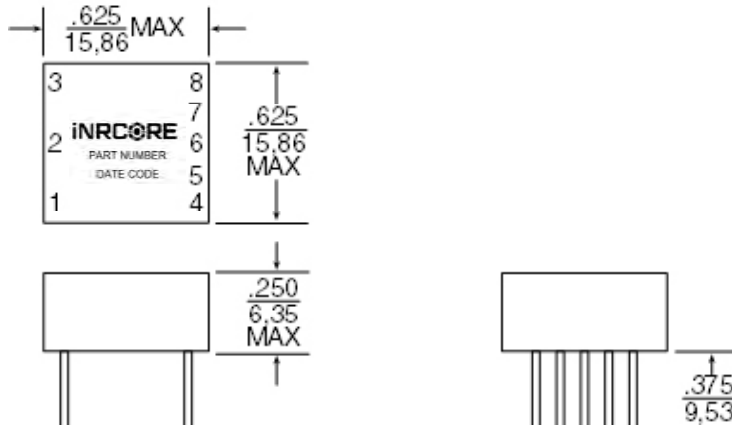



Notes:

1. All dimensions are in inches.
2. Tolerances: $.xx = +.008$
3. All specifications and dimensions are subject to change without notice.
4. MSL - 1
5. Tube - 20 pieces

Mechanical

Electrical Schematic

SMQ1553

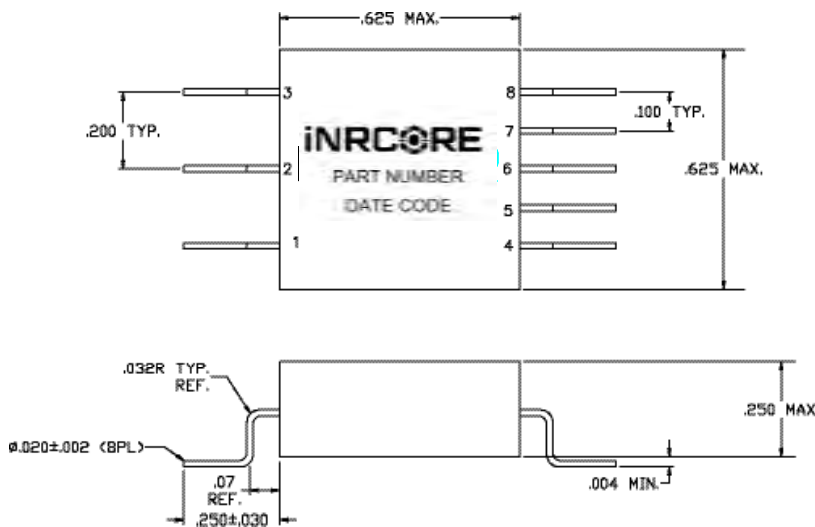

Notes:

1. All dimensions are in inches.
2. Tolerances: $.xx = +.008$
3. All specifications and dimensions are subject to change without notice.
4. MSL - 3
5. Tape & Reel Size- 300 pieces



MIL-STD-1553 Transformers

Low profile 3.3V Pulse Transformers




Ruggedized



Mechanical

Electrical Schematic

GL1553

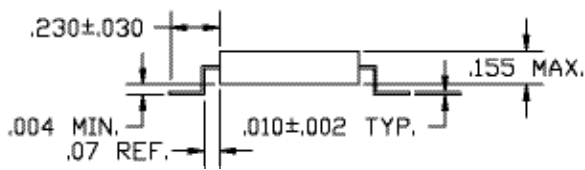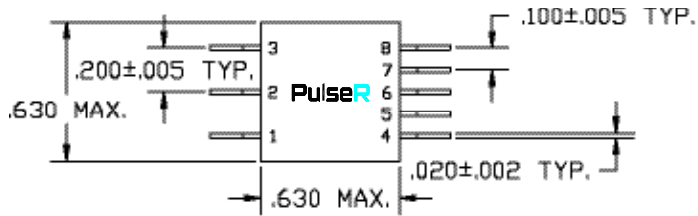




Notes:

1. All dimensions are in inches.
2. Tolerances: .xx = +.008
3. All specifications and dimensions are subject to change without notice.
4. MSL - 3
5. Tape & Reel Size- 350 pieces

Mechanical

Electrical Schematic

DGL1553

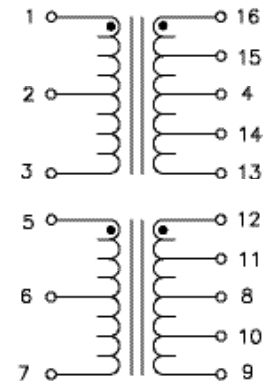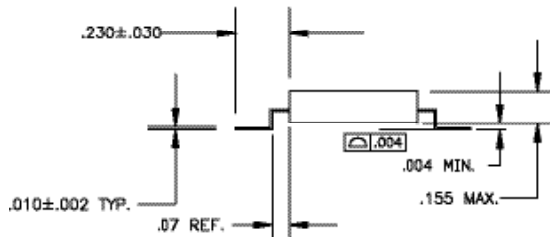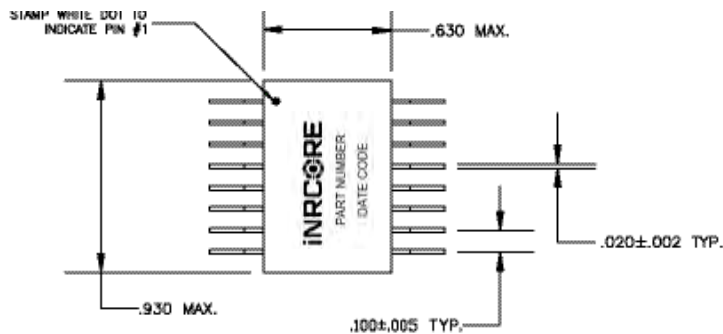


Notes:

1. All dimensions are in inches.
2. Tolerances: .xx = +.008
3. All specifications and dimensions are subject to change without notice.
4. MSL - 3
5. Tape & Reel Size- 300 pieces



Tin/Lead Recommended Reflow Profile (Based on J-STD-020D)

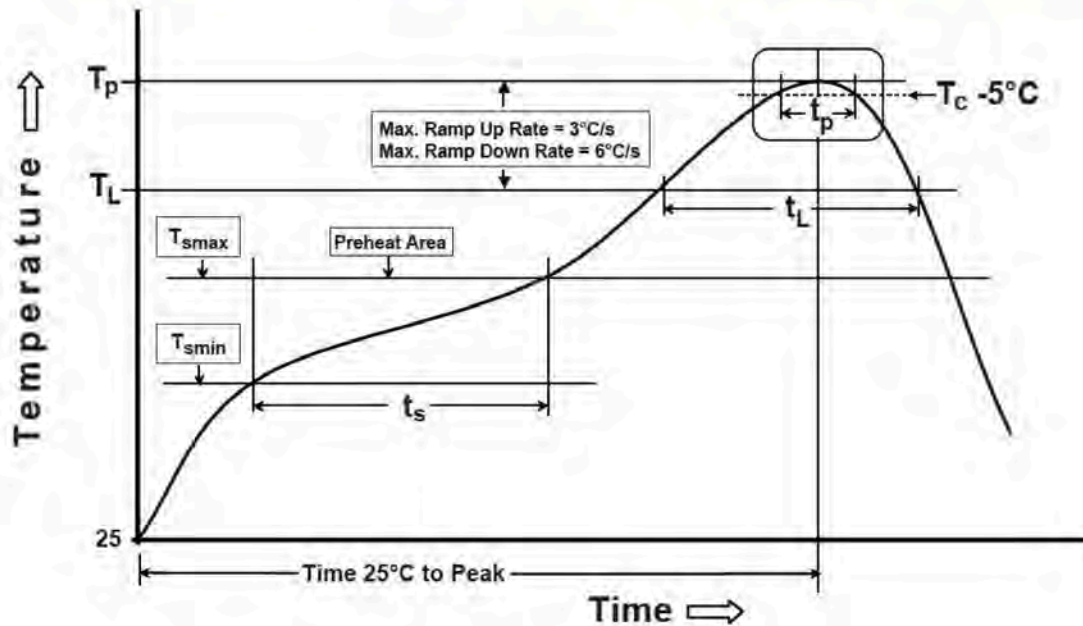

T_{SMIN} (°C)	T_{SMAX} (°C)	T_L (°C)	T_P (°C MAX)	t_s (s)	t_L (s)	t_p (s MAX)	Ramp-up rate (T_L to T_P)	Ramp-down rate (T_P to T_L)	Time 25°C to peak temperature (s MAX)
100	150	183	235	60-120	60-150	20	3°C/s MAX	6°C/s MAX	360

Notes:

1. All temperatures measured on the package leads.
2. Maximum times of reflow cycle: 2.

For More Information

iNRCORE, LLC
 311 Sinclair Road Bristol,
 PA 19007-6812 U.S.A
 Tel: + 1.215.781.6400
 Fax: +1.215.7816430

Global Sales Representatives and Locations:
<http://www.inrcore.com>

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. iNRCORE, LLC. All rights reserved.

