

**Ratings**

Voltage: 300 V  
 Temperature: -25 ~ 80 °C  
 Flammability: VW-1

**Conductor**

Conductor count: 9  
 Gauge: 28 AWG 0.09 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size:  $\phi 0.127 \times 7$   
 Resistance at 20 °C: 239  $\Omega$  /km max

**Insulator**

Material: PVC  
 Color: white, black, red, yellow, blue, green, orange, purple, gray  
 Diameter:  $\phi 0.95 \pm 0.10$  mm  
 Nominal thickness: 0.26 mm  
 Resistance at 20 °C: 10 M $\Omega$  /km min

**Filler**

Material: cotton rope



**Outer jacket**

Material: PVC  
 Color: black  
 Diameter:  $\phi 5.1 \pm 0.20$  mm  
 Nominal thickness: 0.79 mm

**Wire marking:** E339579 UL AWM STYLE 2464 28 AWG 80°C 300V VW-1 --- cUL AWM I/II A 80°C 300V FT1 TENSILITY

**Tests**

Insulation tensile strength: 2.11 kgf/mm<sup>2</sup>  
 Jacket tensile strength: 1.05 kgf/mm<sup>2</sup>  
 After aging at 113  $\pm 2$  °C for 7 days:  
 Minimum tensile strength 70 % original  
 Minimum elongation 65 % original  
 Heat shock: 121  $\pm 1$  °C /1 hour, no observed degradation  
 Deformation: 121  $\pm 1$  °C /1 hour,  $\leq 50$  %  
 Cold bend: -10  $\pm 2$  °C /1 hour, no observed cracking

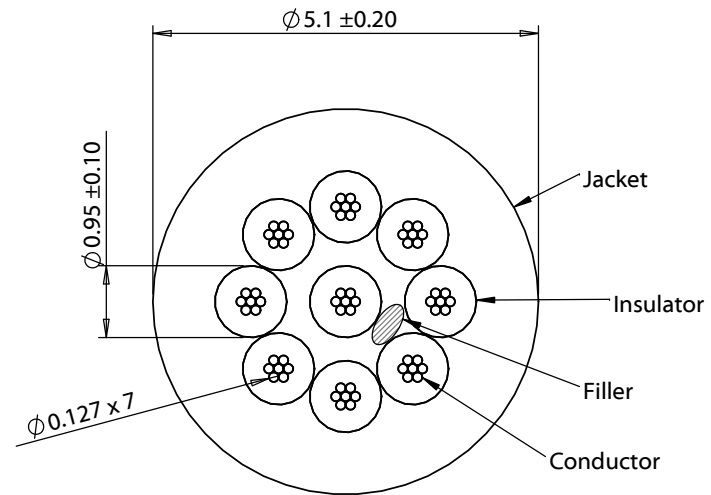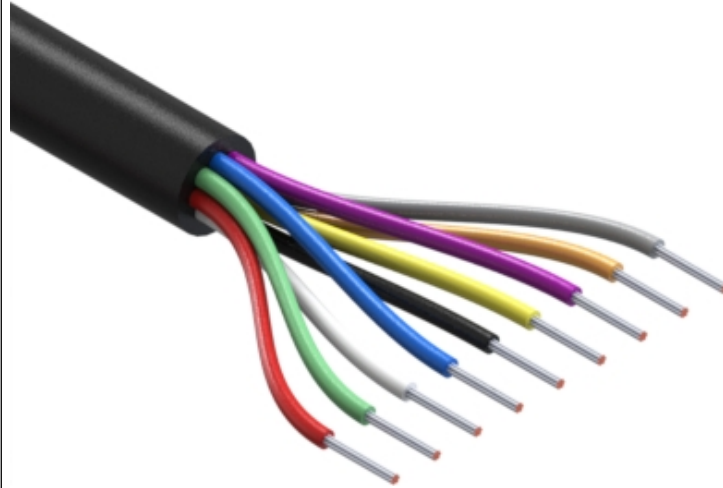

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118                  fax 1.541.323.4202 web tensility.com</p>	
A	10/13/2015	Initial release	Verified:	RoHS and REACH compliant		
A1	1/26/2016	Updated dimensions	Dimensions are in millimeters. Tolerances: X: $\pm 0.5$ mm X.X: $\pm 0.3$ mm X.XX: $\pm 0.05$ mm	Function test: no open, no short circuit, no intermittent	Size: A	Part number: 30-00528
A2	9/6/2018	Increased operating temperature range		Description:	Scale: 10:1	
				Wire, 9C TS, 28 AWG, UL2464, 300V, 80C, 5.1 mm, VW-1, PVC		

5

4

3

2

1