RONDA-WWW-C

~90° wide beam with holder C compatible with LEDiL HEKLA



TECHNICAL SPECIFICATIONS:

Dimensions	Ø 53.9 mm
Height	17 mm
Fastening	socket
ROHS compliant	yes


MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
RONDA-WWW	Single lens	PMMA	clear	
RONDA-HLD-C	Holder	PC	white	

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
FN15966_RONDA-WWW-C	Single lens	420	120	30	0.0
» Box size:					

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

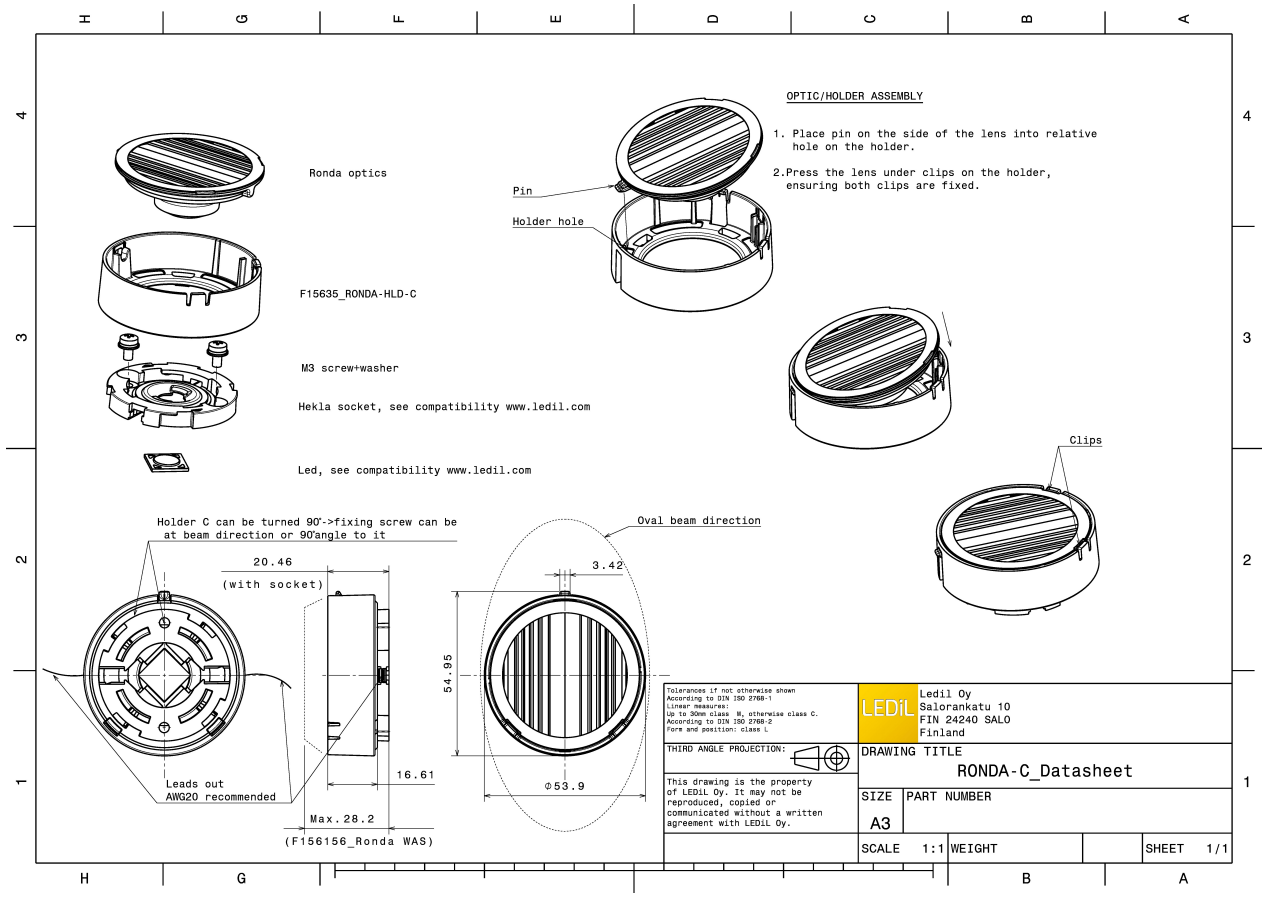

See also our general installation guide: www.ledil.com/installation_guide

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (MEASURED):


bridgelux

LED	V6 Gen6
FWHM / FWTM	89.0° / 129.0°
Efficiency	90 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

F15253_HEKLA-SOCKET-A



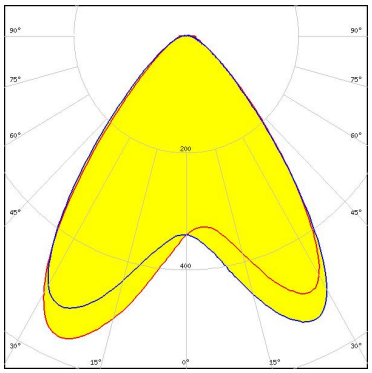


bridgelux

LED	V9 HD
FWHM / FWTM	83.0° / 121.0°
Efficiency	87 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

F15859_HEKLA-SOCKET-I



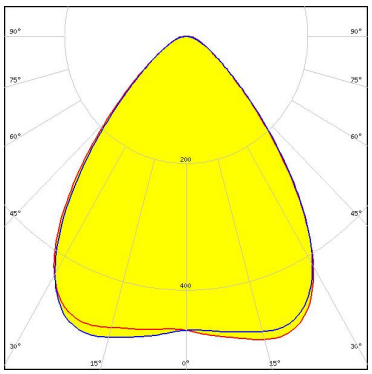


bridgelux

LED	VERO10
FWHM / FWTM	82.0° / 120.0°
Efficiency	89 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

F15616_HEKLA-SOCKET-F



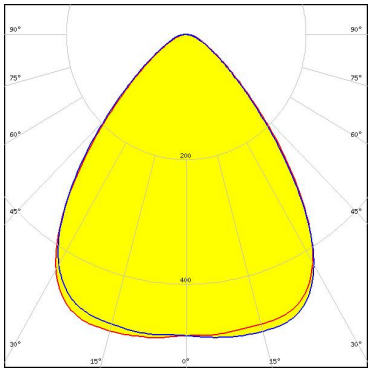

bridgelux


LED	Vesta DTW 13mm (21W)
FWHM / FWTM	77.0° / 127.0°
Efficiency	81 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	Tunable White

Required components:

C16142_HEKLA-SOCKET-K

Bender Wirth: 491 Typ L8



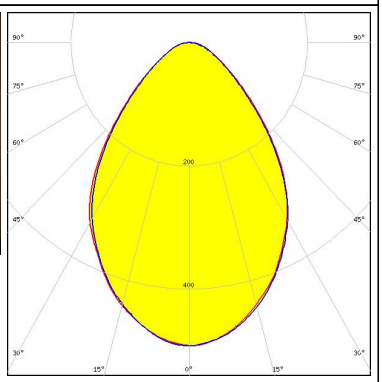

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (MEASURED):


bridgelux

LED	Vesta DTW 15mm (33W)
FWHM / FWTM	67.0° / 112.0°
Efficiency	78 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

C16142_HEKLA-SOCKET-K

Bender Wirth: 491 Typ L8

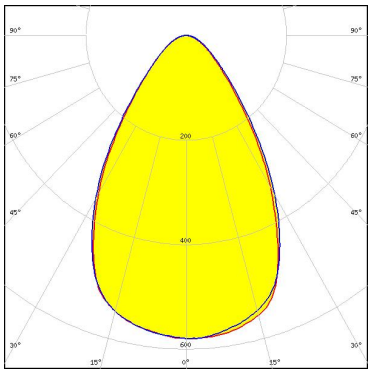

bridgelux


LED	Vesta DTW 9mm (4W/6W/12W)
FWHM / FWTM	77.0° / 115.0°
Efficiency	85 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

C16142_HEKLA-SOCKET-K

Bender Wirth: 490 Typ L8



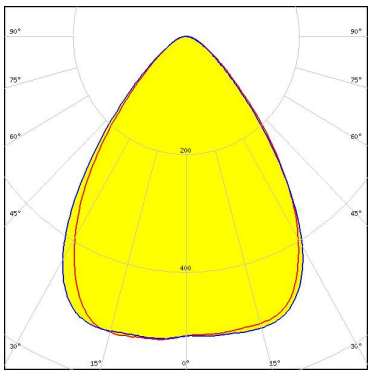

bridgelux


LED	Vesta TW 13mm (25W) CSP
FWHM / FWTM	77.0° / 126.0°
Efficiency	82 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

C16142_HEKLA-SOCKET-K

Bender Wirth: 492 Typ L8



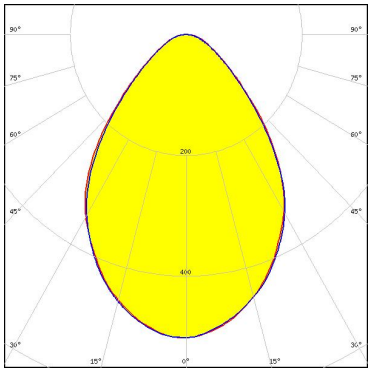

bridgelux

LED	Vesta TW 6mm DP
FWHM / FWTM	80.0° / 116.0°
Efficiency	85 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

C16142_HEKLA-SOCKET-K

Bender Wirth: 504 Typ L8



LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.


PHOTOMETRIC DATA (MEASURED):

bridgelux

LED	Vesta TW 9mm (12W) CSP
FWHM / FWTM	75.0° / 115.0°
Efficiency	86 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
C16142_HEKLA-SOCKET-K




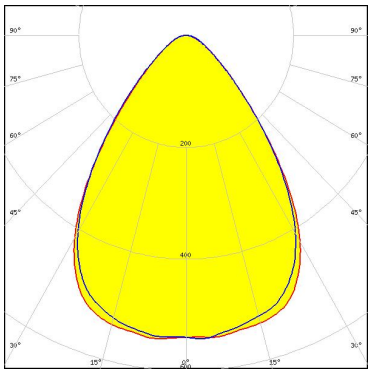


CITIZEN

LED	CLC020 Series (Dim-To-Warm)
FWHM / FWTM	73.0° / 112.0°
Efficiency	86 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
C16142_HEKLA-SOCKET-K

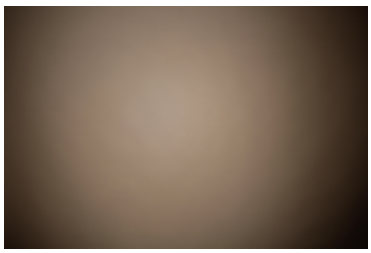

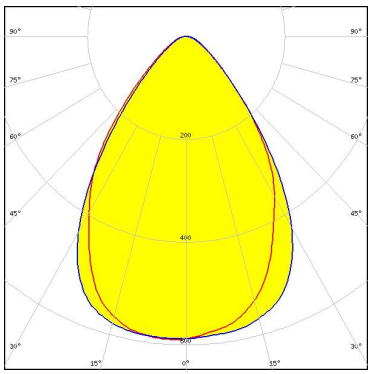


CITIZEN

LED	CLL02x/CLU02x (LES10)
FWHM / FWTM	81.0° / 121.0°
Efficiency	89 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15255_HEKLA-SOCKET-C



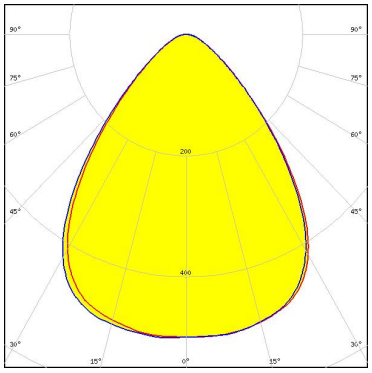


CITIZEN

LED	CLU700/701/702
FWHM / FWTM	93.0° / 132.0°
Efficiency	89 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15255_HEKLA-SOCKET-C



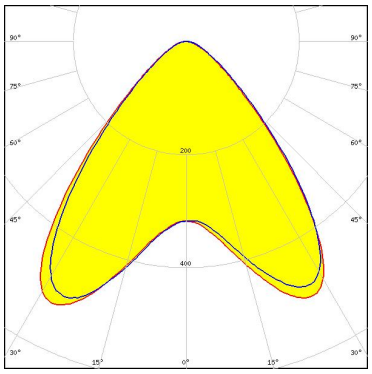

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.


PHOTOMETRIC DATA (MEASURED):

CITIZEN

LED	LCN-C01B (Tunable White)
FWHM / FWTM	74.0° / 114.0°
Efficiency	86 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
C16142_HEKLA-SOCKET-K



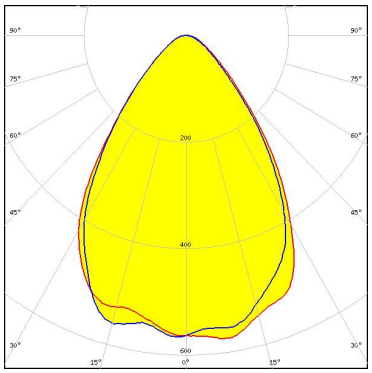


CREE LED

LED	CMA1516
FWHM / FWTM	83.0° / 123.0°
Efficiency	89 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15256_HEKLA-SOCKET-D



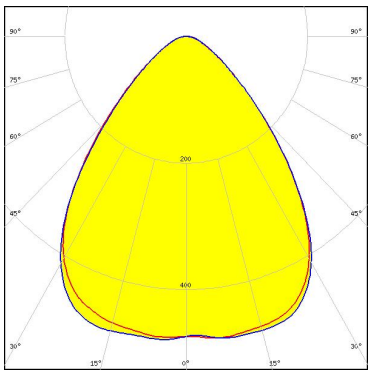


CREE LED

LED	CMA1825
FWHM / FWTM	77.0° / 124.0°
Efficiency	87 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15254_HEKLA-SOCKET-B



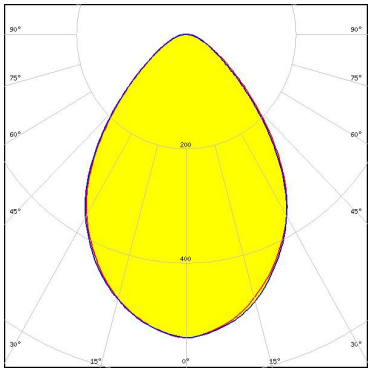


CREE LED

LED	CMT14xx
FWHM / FWTM	79.0° / 119.0°
Efficiency	88 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15255_HEKLA-SOCKET-C



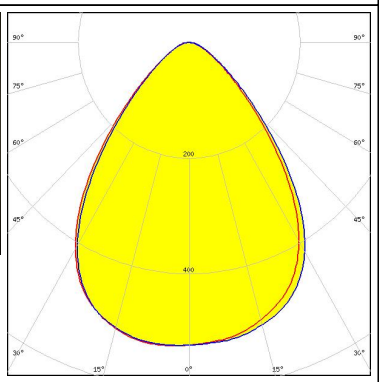

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.


PHOTOMETRIC DATA (MEASURED):

CREE LED

LED	CMT19xx
FWHM / FWTM	80.0° / 129.0°
Efficiency	83 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15859_HEKLA-SOCKET-I



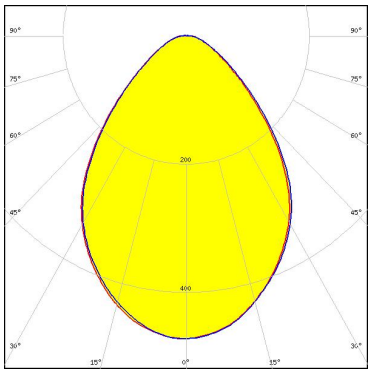


CREE LED

LED	CXA/B 13xx
FWHM / FWTM	94.0° / 131.0°
Efficiency	90 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15956_HEKLA-SOCKET-J



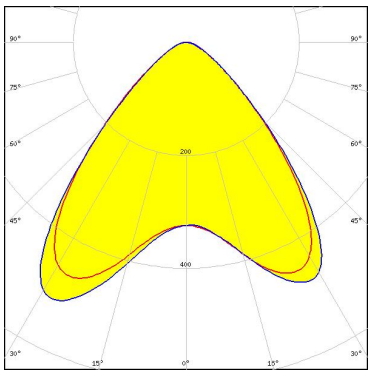


CREE LED

LED	CXA/B 15xx
FWHM / FWTM	84.0° / 123.0°
Efficiency	90 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15256_HEKLA-SOCKET-D



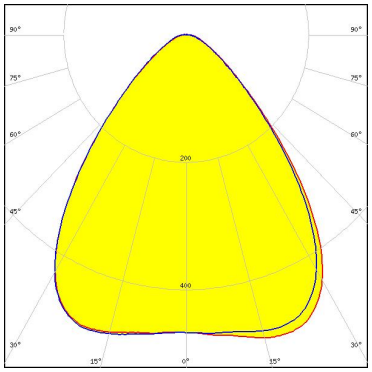


CREE LED

LED	CXA/B 1816 & CXA/B 1820 & CXA 1850
FWHM / FWTM	76.0° / 124.0°
Efficiency	89 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15256_HEKLA-SOCKET-D



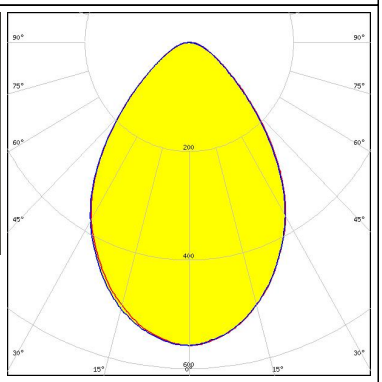

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.


PHOTOMETRIC DATA (MEASURED):

LUMILEDS

LED	LUXEON CX Plus CoB L08 (Gen2)
FWHM / FWTM	78.0° / 129.0°
Efficiency	84 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
Bender Wirth: 637a Hekla



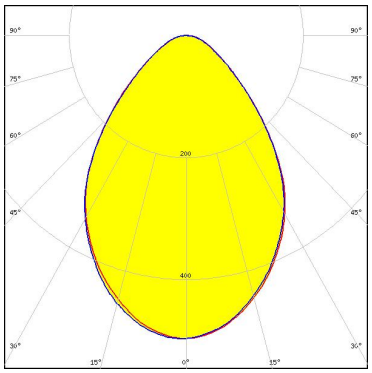


LUMILEDS

LED	LUXEON CoB 1202HD
FWHM / FWTM	89.0° / 128.0°
Efficiency	89 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15848_HEKLA-SOCKET-G



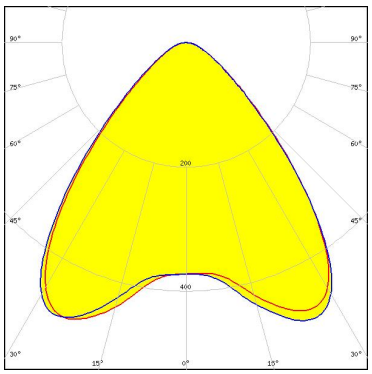


LUMILEDS

LED	LUXEON CoB 1202s
FWHM / FWTM	94.0° / 133.0°
Efficiency	90 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15848_HEKLA-SOCKET-G




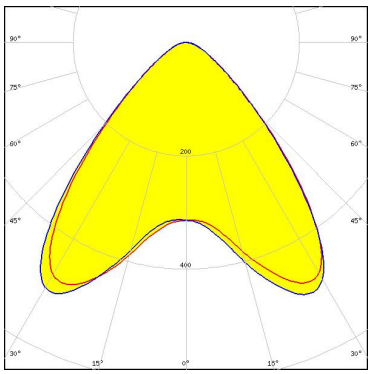


LUMILEDS

LED	LUXEON CoB 1204HD
FWHM / FWTM	83.0° / 131.0°
Efficiency	90 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15858_HEKLA-SOCKET-H

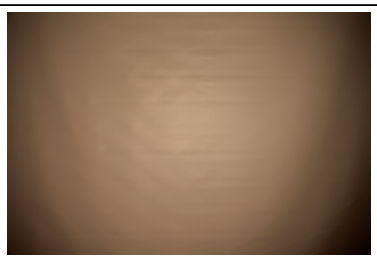

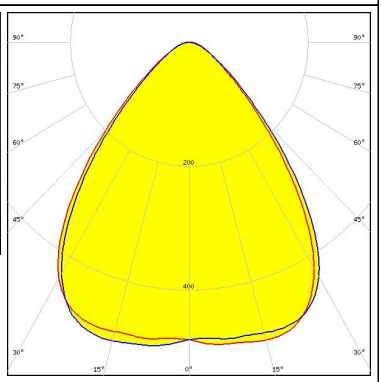

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.


PHOTOMETRIC DATA (MEASURED):

LUMILEDS

LED	LUXEON CoB 1205HD
FWHM / FWTM	75.0° / 118.0°
Efficiency	87 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15858_HEKLA-SOCKET-H




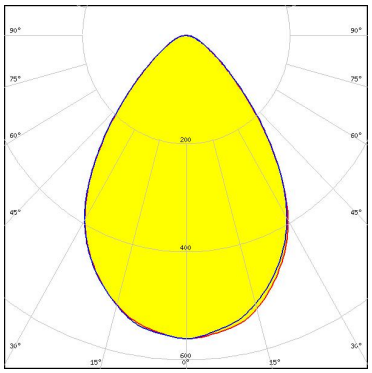


LUMILEDS

LED	LUXEON CX Plus CoB - HD S01H4
FWHM / FWTM	83.0° / 118.0°
Efficiency	89 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
Bender Wirth: 634c Hekla

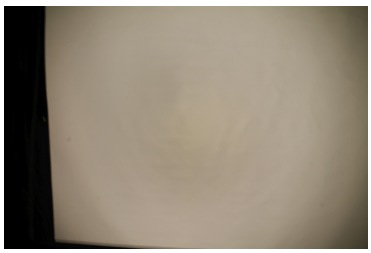


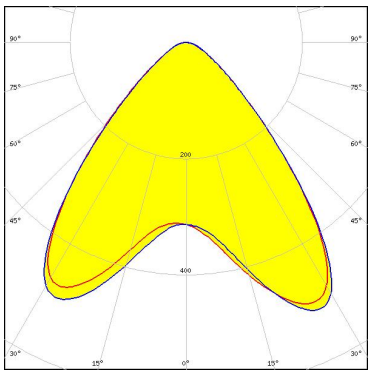


LUMILEDS

LED	LUXEON CX Plus CoB - HD S01H6 / HD S02H6
FWHM / FWTM	83.0° / 118.0°
Efficiency	89 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
Bender Wirth: 634c Hekla

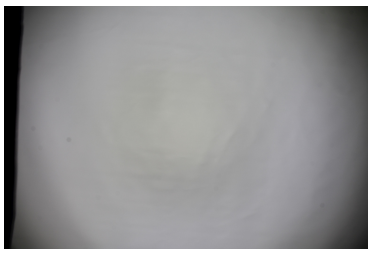

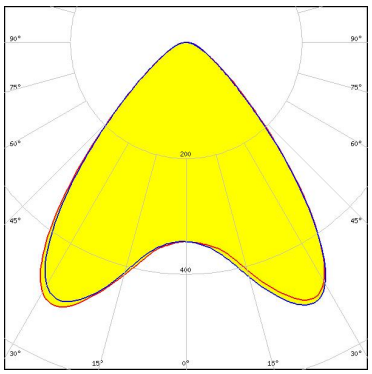


LUMILEDS

LED	LUXEON CX Plus CoB - HD S04H9
FWHM / FWTM	80.0° / 118.0°
Efficiency	89 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
Bender Wirth: 634c Hekla



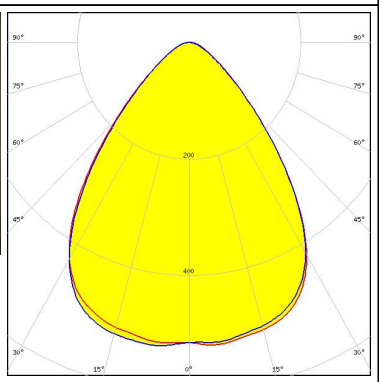

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.


PHOTOMETRIC DATA (MEASURED):

LUMILEDS

LED	LUXEON CX Plus CoB L04 / L05 (Gen2)
FWHM / FWTM	76.0° / 118.0°
Efficiency	88 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
Bender Wirth: 637a Hekla



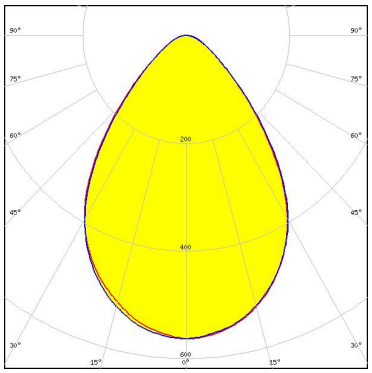


LUMILEDS

LED	LUXEON CX Plus CoB M02 / M03 (Gen2)
FWHM / FWTM	80.0° / 118.0°
Efficiency	89 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
Bender Wirth: 641a Hekla




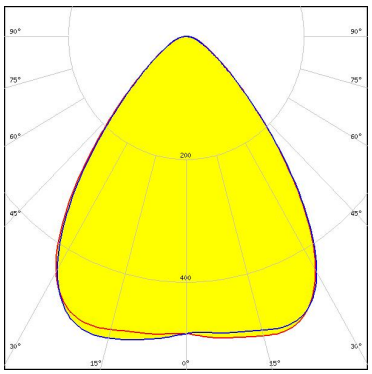


LUMILEDS

LED	LUXEON CX Plus CoB S01 (Gen2)
FWHM / FWTM	83.0° / 117.0°
Efficiency	90 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
Bender Wirth: 634c Hekla

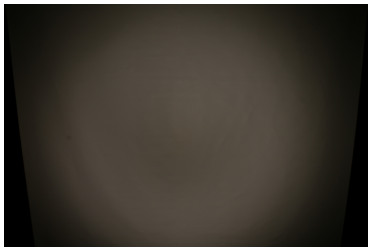


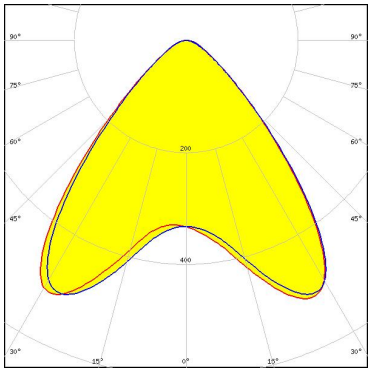


LUMINUS

LED	CDM-14 (Dim-To-Warm)
FWHM / FWTM	81.0° / 128.0°
Efficiency	80 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
C16142_HEKLA-SOCKET-K
Bender Wirth: 491 Typ L8

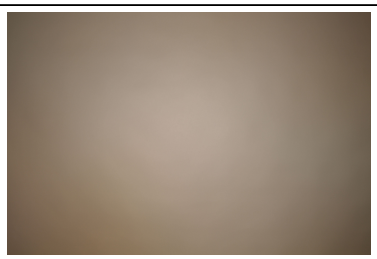

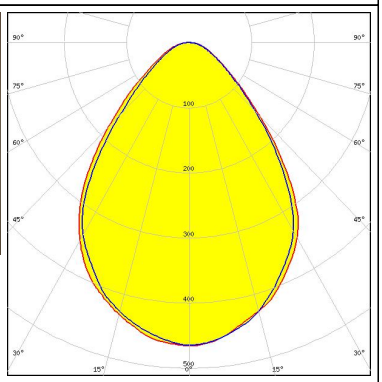

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (MEASURED):

LUMINUS


LED	CDM-6 (Dim-To-Warm)
FWHM / FWTM	90.0° / 131.0°
Efficiency	87 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

C16142_HEKLA-SOCKET-K

Bender Wirth: 490 Typ L8



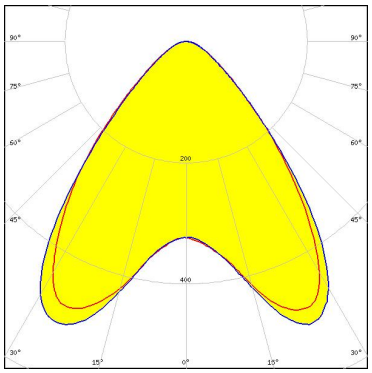

LUMINUS


LED	CDM-9 (Dim-To-Warm)
FWHM / FWTM	82.0° / 121.0°
Efficiency	86 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

C16142_HEKLA-SOCKET-K

Bender Wirth: 490 Typ L8



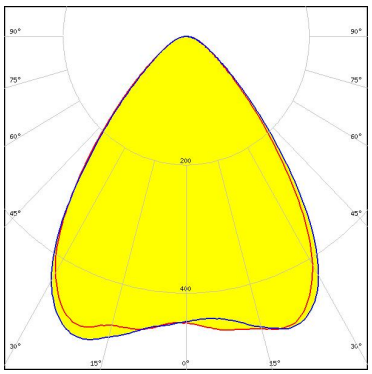


LUMINUS


LED	CTM-14 (Tunable White)
FWHM / FWTM	79.0° / 126.0°
Efficiency	81 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

C16142_HEKLA-SOCKET-K

Bender Wirth: 442 Typ L8

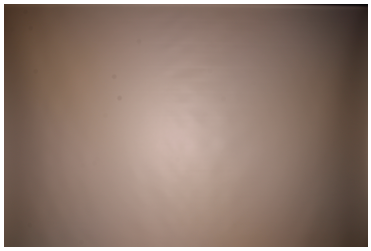


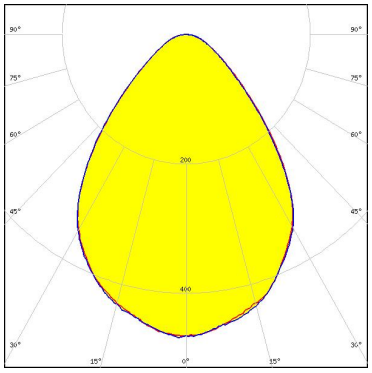


LUMINUS

LED	CTM-9 (Tunable White)
FWHM / FWTM	79.0° / 118.0°
Efficiency	86 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

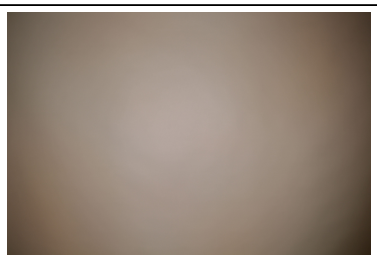

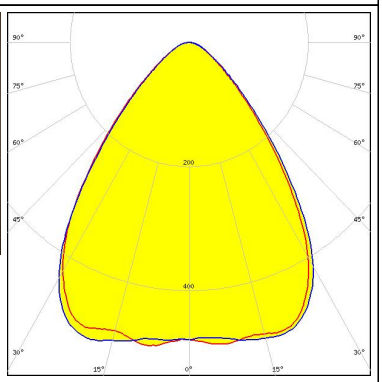

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.


PHOTOMETRIC DATA (MEASURED):

LUMINUS

LED	CxM-9 (13.5x13.5)
FWHM / FWTM	80.0° / 119.0°
Efficiency	89 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15255_HEKLA-SOCKET-C



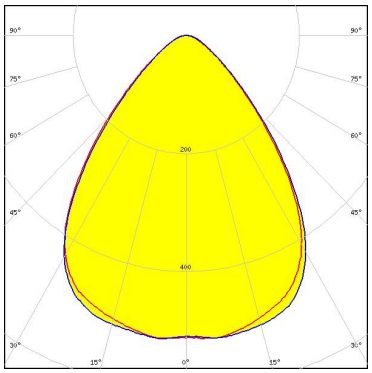


NICHIA

LED	NJCWL024Z-V1MT: COB L-Type Tunable White
FWHM / FWTM	85.0° / 122.0°
Efficiency	83 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
C16142_HEKLA-SOCKET-K
Bender Wirth: 497 Typ L8



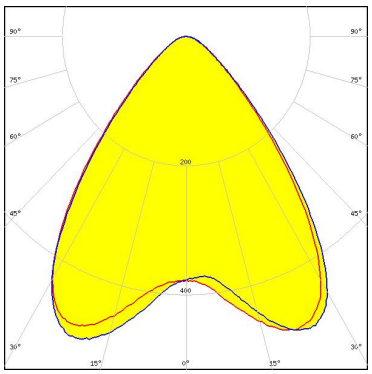


NICHIA

LED	NVCWJ024Z-V1MT: COB J-Type Tunable White
FWHM / FWTM	76.0° / 117.0°
Efficiency	86 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
C16142_HEKLA-SOCKET-K
Bender Wirth: 498 Typ L8



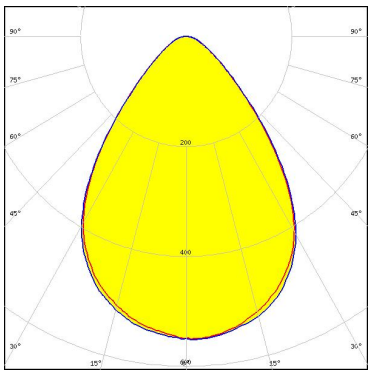


PHILIPS

LED	Fortimo SLM L09 CoB
FWHM / FWTM	81.0° / 120.0°
Efficiency	88 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15858_HEKLA-SOCKET-H



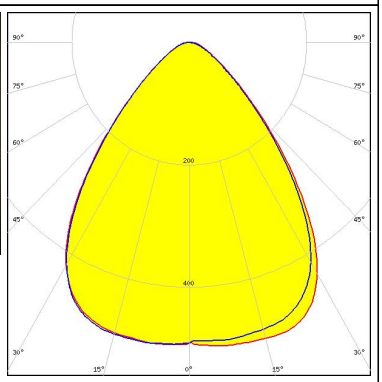

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.


PHOTOMETRIC DATA (MEASURED):

PHILIPS

LED	Fortimo SLM L13 CoB
FWHM / FWTM	77.0° / 127.0°
Efficiency	82 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
- C16142_HEKLA-SOCKET-K
- Bender Wirth: 432 Typ L8



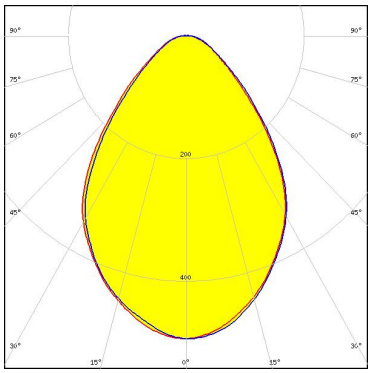

PHILIPS

LED	Fortimo SLM L13 CoB
FWHM / FWTM	77.0° / 127.0°
Efficiency	82 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
- C16142_HEKLA-SOCKET-K
- Bender Wirth: 432 Typ L8




SAMSUNG

LED	LC003D / LC006D / LC009D / LC013D
FWHM / FWTM	81.0° / 121.0°
Efficiency	90 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
- F15255_HEKLA-SOCKET-C



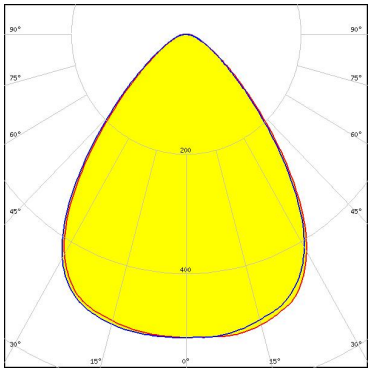


SAMSUNG

LED	LC010C
FWHM / FWTM	94.0° / 133.0°
Efficiency	89 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
- F15848_HEKLA-SOCKET-G



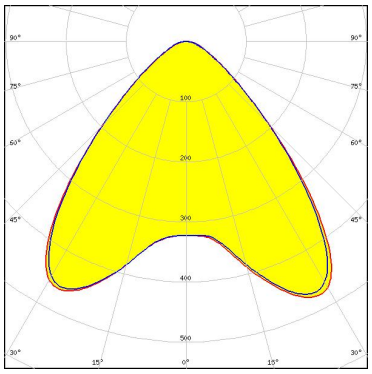

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.


PHOTOMETRIC DATA (MEASURED):

SAMSUNG

LED	LC010C G2
FWHM / FWTM	94.0° / 133.0°
Efficiency	89 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15255_HEKLA-SOCKET-C



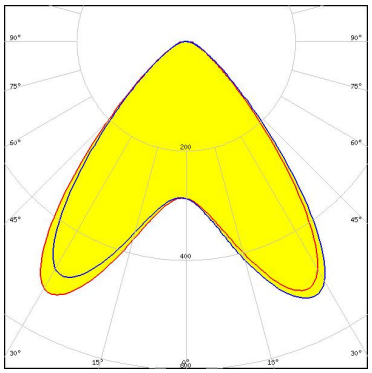


SAMSUNG

LED	LC010T (Tunable White)
FWHM / FWTM	76.0° / 117.0°
Efficiency	86 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	Tunable White

Required components:
C16142_HEKLA-SOCKET-K
Bender Wirth: 501 Typ L8




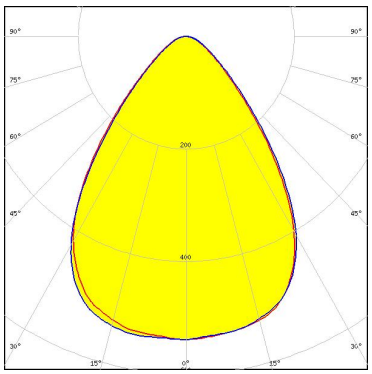


SAMSUNG

LED	LC016D / LC019D / LC026D / LC033D
FWHM / FWTM	80.0° / 131.0°
Efficiency	82 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15859_HEKLA-SOCKET-I

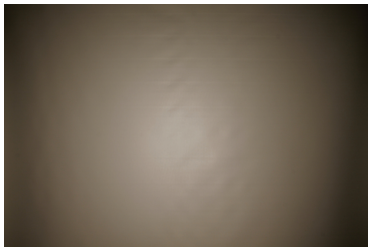

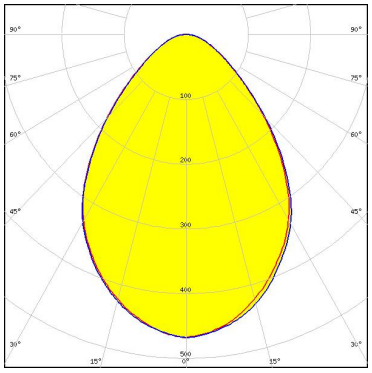


SAMSUNG

LED	LC020C
FWHM / FWTM	87.0° / 127.0°
Efficiency	90 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15848_HEKLA-SOCKET-G



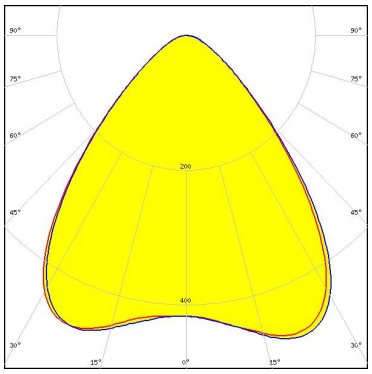

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (MEASURED):


SAMSUNG

LED	LC020C G2
FWHM / FWTM	82.0° / 120.0°
Efficiency	88 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

F15859_HEKLA-SOCKET-I



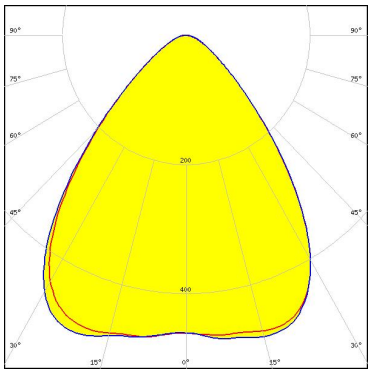

SAMSUNG


LED	LC020T (Tunable white)
FWHM / FWTM	75.0° / 122.0°
Efficiency	83 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	Tunable White

Required components:

C16142_HEKLA-SOCKET-K

Bender Wirth: 501 Typ L8



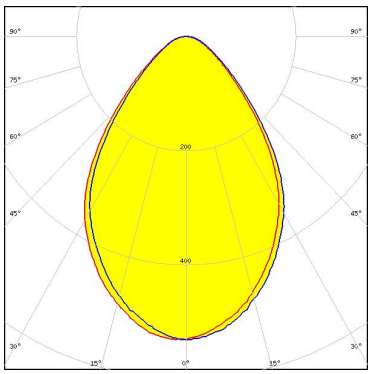



SEOUL SEMICONDUCTOR

LED	MJT COB LES 6
FWHM / FWTM	91.0° / 129.0°
Efficiency	86 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

F15255_HEKLA-SOCKET-C

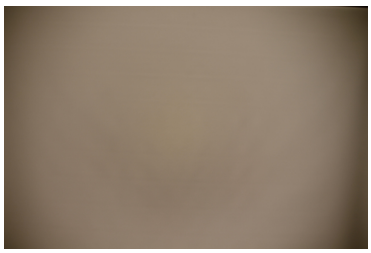

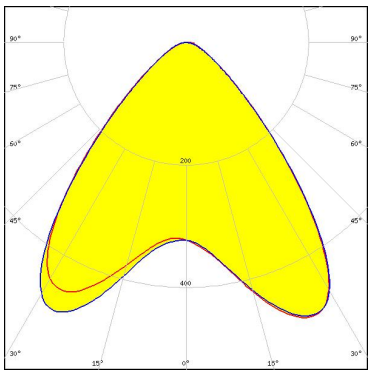



SEOUL SEMICONDUCTOR

LED	MJT COB LES 9.8
FWHM / FWTM	79.0° / 118.0°
Efficiency	86 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

F15255_HEKLA-SOCKET-C

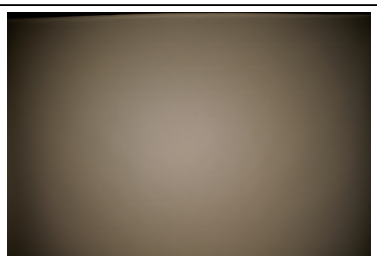

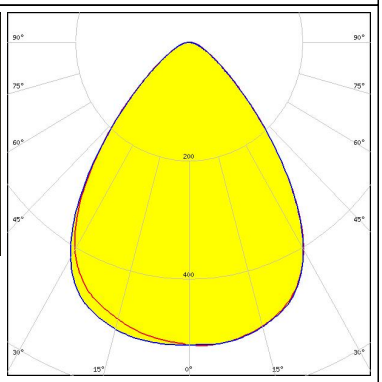

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.


PHOTOMETRIC DATA (MEASURED):

TRIDONIC

LED	SLE G7 LES09
FWHM / FWTM	83.0° / 120.0°
Efficiency	89 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15255_HEKLA-SOCKET-C



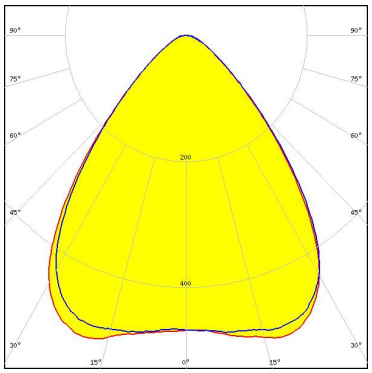


TRIDONIC

LED	SLE G7 LES13
FWHM / FWTM	78.0° / 124.0°
Efficiency	85 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15859_HEKLA-SOCKET-I



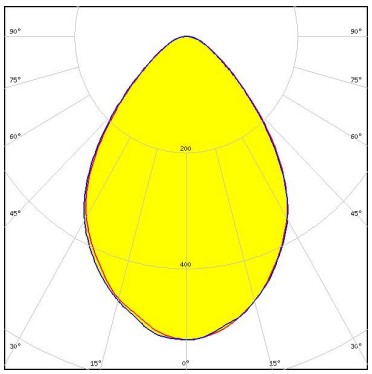


TRIDONIC

LED	SLE G7 LES15
FWHM / FWTM	81.0° / 132.0°
Efficiency	83 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15859_HEKLA-SOCKET-I




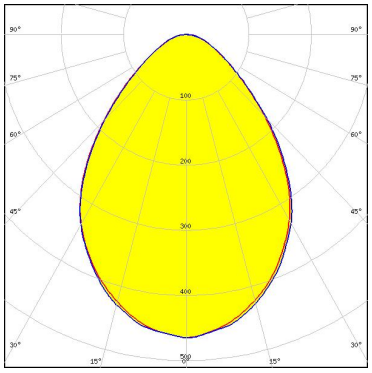


XICATO

LED	XOB 14.5 mm
FWHM / FWTM	78.0° / 128.0°
Efficiency	83 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:
F15859_HEKLA-SOCKET-I

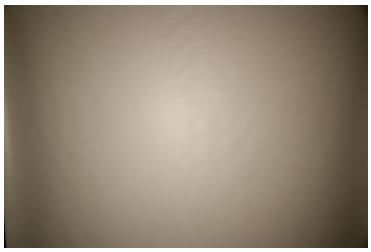

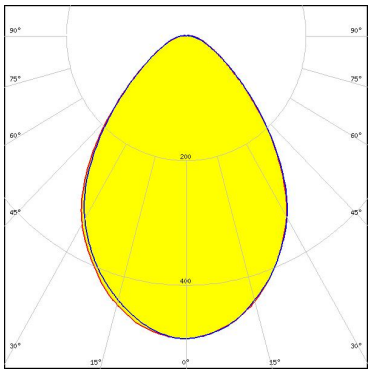

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (MEASURED):


XICATO

LED	XOB 9.8 mm
FWHM / FWTM	81.0° / 121.0 + 120.5°
Efficiency	89 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

F15255_HEKLA-SOCKET-C



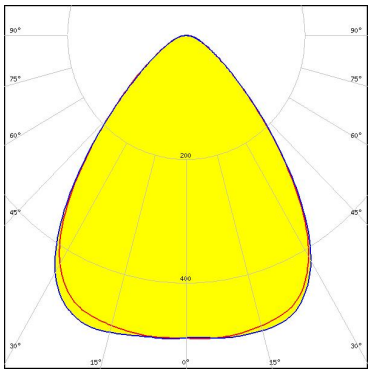


XICATO

LED	XTM - 19mm LES
FWHM / FWTM	81.0° / 137.0°
Efficiency	83 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour	White

Required components:

C16058_XTM-ADAPTER-50-C



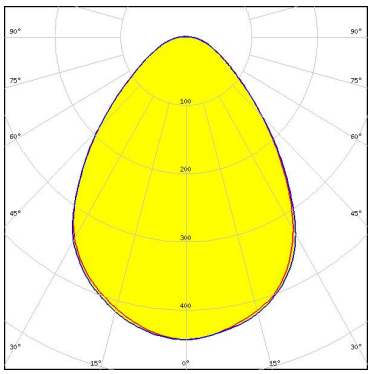

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy
Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.
228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.
405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support
www.ledil.com/
where_to_buy

Shipping locations
Salo, Finland
Hong Kong, China

Distribution Partners
www.ledil.com/
where_to_buy

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.