

## Data Sheet

**Total Power:** 60 Watts  
**Input Voltages:** 3.0 - 5.5 V  
**# of Outputs:** Single

### SPECIAL FEATURES

- Point-of-load (POL) applications
- High current slew rate at 2.5 A /  $\mu\text{S}$ <sup>1</sup>
- Open frame SMT
- High efficiency, 3.3 V @ 95% typical
- Adjustable output through external resistor programming
- -40 °C to +85 °C ambient operating temperature
- UVLO protection
- Positive Enable function
- Low output ripple and noise
- Regulation to zero load

### SAFETY

- UL/cUL 60950 Recognized
- TÜV EN60950 Licensed



### Electrical Specifications

Input	
Input voltage range	3.0 - 5.5 V
Efficiency	3.3 V @ 95% typical
Control	
Enable	TTL compatible (positive enable)
Output	
Regulation (line, Load, Temp)	<3%
Load current	18 A max
Ripple and noise <sup>1</sup>	50 mV
Output adjust range	0.75 V - 3.6 V
Current slew rate	up to 2.5 A / $\mu\text{S}$
Transient response <sup>1</sup>	150 mV typical deviation (3.3 Vo) for 50% to 100% step load 200 $\mu\text{S}$ recovery
Remote sense	10% of Vo
Turn on input voltage	3.0 V (typical)
UVLO hysteresis	300 mV (typical)
OCP/OTP	Hiccup - auto recovery
Isolation	Non-isolated module

### Environmental Specifications

Operating temperature	-40 °C to +85 °C
Storage temperature	-40 °C to +125 °C
MTBF	1 million hours


### Ordering Information

Model Number	Input Voltage	Output Voltage	Output Current	Efficiency (Typical)
APC18T04-9(J)L	3.0 - 5.5 V	0.75 - 3.6 Vdc	18 A	95%

**Note:**

18 A max output current with total output power limited to 60 W - minimal output derating required  
 Typical efficiency for 3.3 V output; full load; nominal input voltage; 200 LFM at Ta = 25 °C  
 Suffix "J" designates tray packaging, non "J" is tape and reel

### Mechanical Drawings

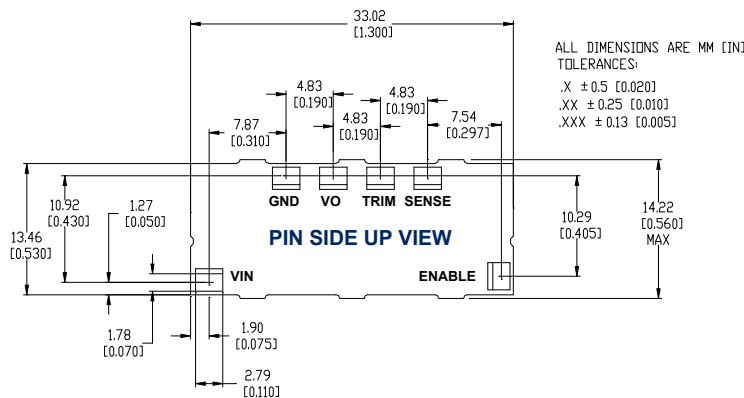


**Notes:**

- 200 uF and 2x 150uF input and output capacitance required.
- All specifications are typical at nominal line, full load and 25°C ambient temperature unless otherwise noted.
- All specifications subject to change without notice. Mechanical drawings are for reference only.
- Technical Reference Notes should be consulted for detailed information
- Warranty: One year

#### Recommended PAD Layout

PAD Size  
 MIN: 1.6 x 2.8 mm [0.065 x 0.110 inches]  
 REC: 1.8 x 2.8 mm [0.070 x 0.110 inches]  
 MAX: 2.0 x 3.0 mm [0.080 x 0.130 inches]

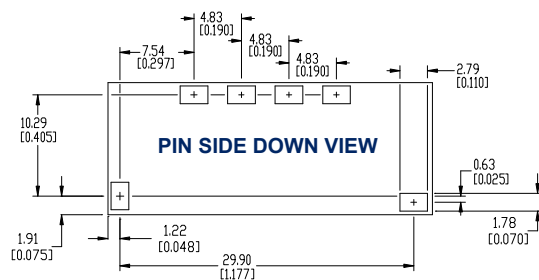

### WORLDWIDE OFFICES

**Americas**

2900 South Diablo Way  
 Suite B100  
 Tempe, AZ 85282, USA  
 +1 888 412 7832

**Europe (UK)**

Ground Floor Offices, Barberry House  
 4 Harbour Buildings, Waterfront West  
 Brierley Hill, West Midlands  
 DY5 1LN, UK  
 +44 (0) 1384 842 211

**Asia (HK)**

14/F, Lu Plaza  
 2 Wing Yip Street  
 Kwun Tong, Kowloon  
 Hong Kong  
 +852 2176 3333



www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit [www.artesyn.com/legal](http://www.artesyn.com/legal).

For more information: [www.artesyn.com](http://www.artesyn.com)  
 For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)