
	Ŧ	D D	г	m	0
_					





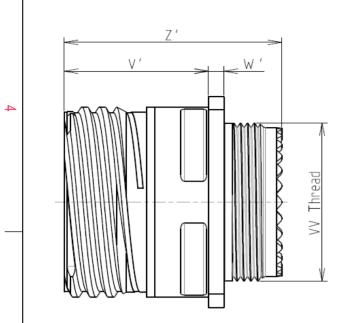

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	-65°C to +200°C			
-Salt Spray	: 2000 hours			

8D 0

G

13

Μ

03

S

F

Ν

L

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
VV THREAD	M18x1-6g


Delivered W/O Contacts


CONTACT LAYOUT : 13-03

CONTACT TYPE : SOCKET(500 Matings)

Е

**ORIENTATION : N** 



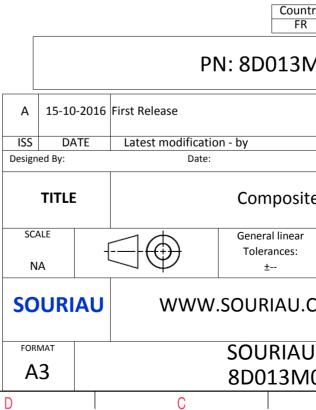

σ		Þ		
C C C C C C C C C C C C C C C C C C C			4	
AS EXAMPLE			3	
any non-conformi s which does not co er of the Parties or ndation, technical n untry Juriso FR BMO3SNL	omply with by a third party		2	
	CUSTOMER DR	MOD N°		
ite Receptacle 8D series				
ar :	NPRDS / PROJECT <b>859</b>			
I.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N° M03SNL-C	1	SHEET		
B		Α		
-				

-	Ŧ	۵	н <b>г</b>	m	D	0	
		Contact Layout					Panel Cuto
4		03 () ) ) 3#16			۸ ۲	SQUARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	0)
	Ctc A B C	13-03   X Y   2.39 1.47   0 -2.79   -2.39 1.47			J.		<u>ø</u> T_A Dim
ω		·				¢ Ø	ØΑ δΑΑ R1 ØT
	F					SOURIAU shall not b	
						due to a use of th the Specifications issu (professional	ed by either
N						PN·	Count FR 8D013N
						116 First Release	
					ISS DATE Designed By: TITLE	Date:	ov Composit
<u> </u>					SCALE NA		General linear Tolerances: ±
					SOURIA	U WWW.SC	URIAU.
					FORMAT A3	8	OURIAL D013M
	Н	l G	F	E	D	l C	

