REVISION			
REV.	DESCRIPTION	DATE	APPROVED

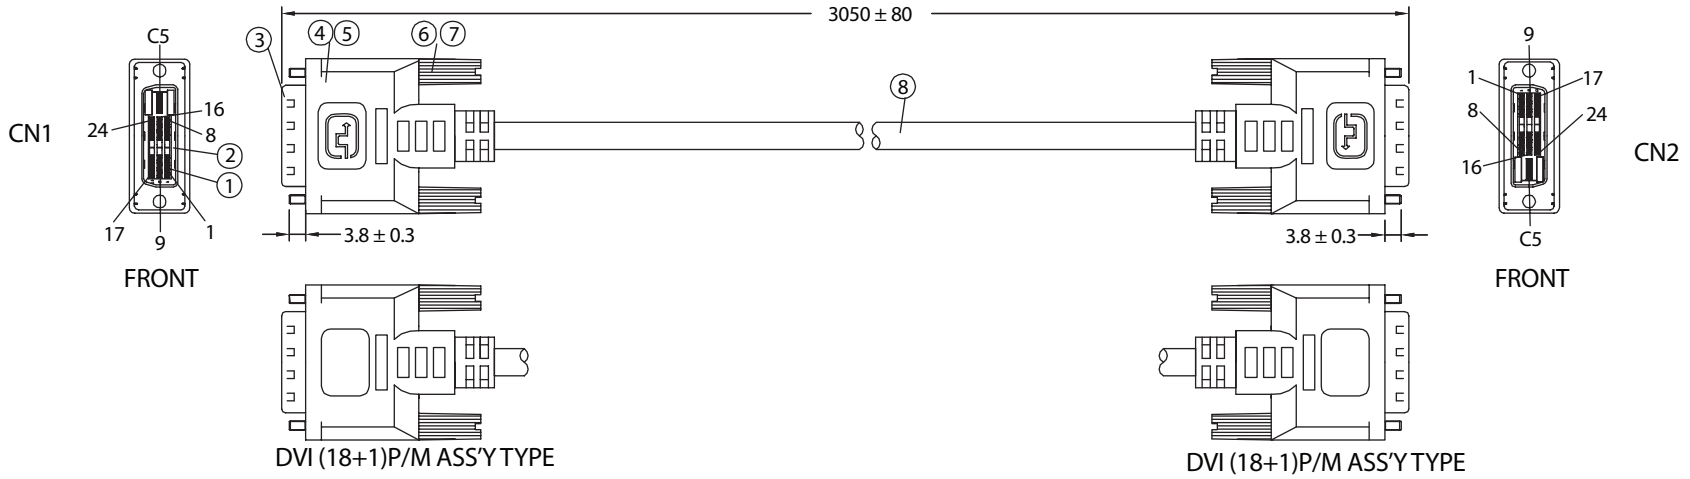

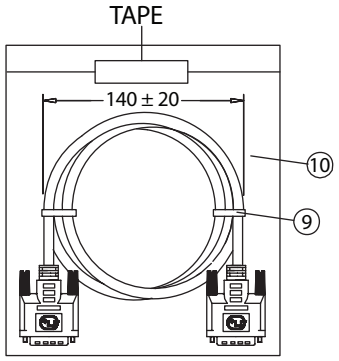

PIN OUT

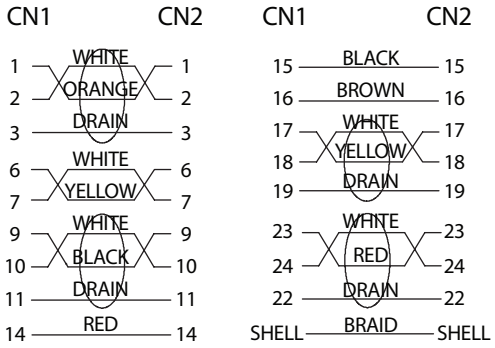

NOTES:

1. CABLE: UL20276 28AWG
   (28AWGx1P+DW+AL)x4P+28AWGx3C+28AWGx1P+MYLAR+FOIL+BD
   OUTER JACKET PVC OD: 7.0 ± 0.2, COLOR: BEIGE
   PRINTING: "E166307 AWM 20276 28AWG 80°C 30V VW-1
   LOW VOLTAGE COMPUTER CABLE"
2. CONNECTORS: DVI(18+1)P/M-DVI(18+1)P/M
3. HOOD: ASS'Y TYPE, COVER COLOR: BEIGE
4. CABLE ELECTRICAL TEST:
   <1>.100% OPEN SHORT & MISS WIRE TEST
   <2>. INSULATION RESISTANCE: DC400V 10M ohm MIN.
   <3>. CONDUCTOR RESISTANCE: 3 ohm MAX.
5. PACKING: 1PC/POLYBAG

No.	PARTS NAME	SPECIFICATION STANDARD	QTY	REMARKS
①	DVI (18+1)P/M-CONTACT	BRASS/GOLD PLATED SOLDER TYPE	38	
②	DVI (18+1)P/M-INSULATOR	THERMOPLASTIC/BLACK UL 94V-0	2	
③	DVI (18+1)P/M-SHELL	STEEL NICKEL PLATED	2	
④	CAN	STEEL TIN PLATED	2	
⑤	DVI (18+1)P/M-COVER	45P PVC/COLOR: BEIGE	2	
⑥	THUMB SCREW	#4-40 2.8*45, NICKEL PLATED	4	
⑦	SCREW-MOLD	35P PVC/COLOR: BEIGE	4	
⑧	CABLE DVI 18+1 UL20276	KL03006ABK01A	1	
⑨	MINI TIE	PE/BLACK	2	
⑩	POLYBAG	PE/0.08x200x250	1	

Dim range (mm)	Tolerance +/- (mm)
0-1	0.15
1-6	0.20
6-18	0.30
18-50	0.50
50-120	0.70
120-250	0.90
250-500	1.20

Qualtek Electronics Corp.
WCI DIVISION

Part Number: 1321024-10 RoHS Compliant

Description: DVI (18+1)P/M - DVI (18+1)P/M

Drawn / Date	Checked / Date	Approved / Date
B. Grubb 01-25-07	01-25-07	JJH / 01-25-07