


## Specification Sheet

Part Number: 596-00389

Pre-Printed Signal Word labels come with the header pre-printed in colors so that only one color of ribbon is needed to complete the message panel.

Labels are pre-made to the most recent ANSI standards so that code compliance is assured.

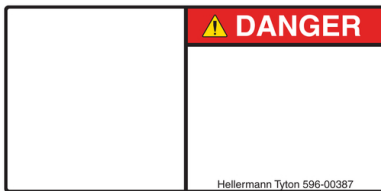

Pre-Printed Signal Panel labels can be printed using standard thermal transfer printers to reduce labor, eliminate minimum orders and allow the user to create labels on demand when needed.

Pre-Printed Header Label, DANGER, Blank Symbol Panel, 2.75" x 5.50", PET, Red, 250/roll

**Article Number** 596-00389

**Type** DS55X275

**Color** Red (RD)

**Quantity Per** roll

**Product Description** These labels come with preprinted color headers so only one color of ribbon is needed to complete the message panel. Labels can be used with TagPrint® Pro label software and HellermannTyton thermal transfer printers to reduce labor, eliminate minimum orders and allow the user to create labels on demand.

<b>Short Description</b>	Pre-Printed Header Label, DANGER, Blank Symbol Panel, 2.75" x 5.50", PET, Red, 250/roll
<b>Global Part Name</b>	DS55X275-336/926-RD
<b>Technical Description</b>	Pre-Printed Header Label, DANGER, Blank Symbol Panel, 2.75" X 5.5", Red
<b>Width W (Imperial)</b>	5.5
<b>Width W (Metric)</b>	139.7
<b>Thickness T (Metric)</b>	64.0
<b>Height H (Imperial)</b>	2.75
<b>Height H (Metric)</b>	69.85
<b>Width of Liner (Metric)</b>	71.12
<b>Width of Liner (Imperial)</b>	2.80
<b>Material</b>	Type 336/926, Polyester, UV-stabilized, clear polyester laminate (336/926)
<b>Material Shortcut</b>	336/926
<b>Adhesive</b>	Acrylic

<b>Halogen Free</b>	Yes
<b>Adhesive Operating Temperature</b>	-40°F to +302°F (-40°C to +150°C)
<b>Operating Temperature</b>	-40°F to +302°F (-40°C to +150°C)
<b>Reach Compliant (Article 33)</b>	Yes
<b>ROHS Compliant</b>	Yes
<b>UL Recognized (US)</b>	Yes
<b>Package Quantity (Imperial)</b>	250
<b>Package Quantity (Metric)</b>	250
<b>Customs Number</b>	3919102055
<b>Labels per Column</b>	1
<b>Labels per Row</b>	1