XT214 Series : SMD Crystal 2.0x1.6 20.000 - 50.000MHz

● SPECIFICATION


Model	XT214 Series
Frequency range	20.000 ~ 50.000 MHz
Frequency tolerance	±10 , 20 , 30ppm (at 25°C)
Frequency stability	±10 , 20 , 30ppm (Ref. to 25°C)
Operation temperature	- 20°C ~ + 70°C Typical
Storange temperature	- 40°C ~ + 85°C
Load capacitance	Series, 6pF, 8pF, 9pF,10pF,12pF,15pF,18pF, 20pF or Special requirement.
Drive Level	10uW (200uW max.)
Series resistance	See below
Shunt capacitance	2pF max.
AGING	±3ppm / Year.

● EQUIVALENT SERIES RESISTANCE


Frequancy MHz	Model	ESR
20.000-30.000	Fundmental	100 Ω max.
30.001-50.000	Fundmental	80 Ω max.

● DIMENSIONS (mm)

XT214

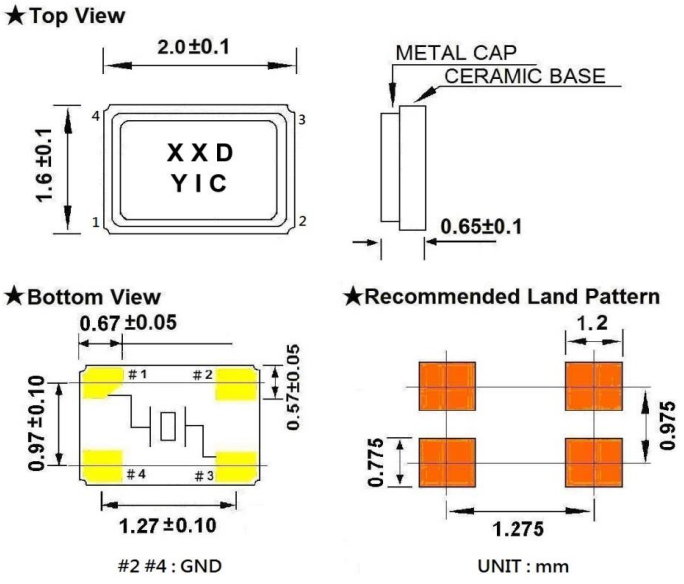

● REEL PACKING(mm)

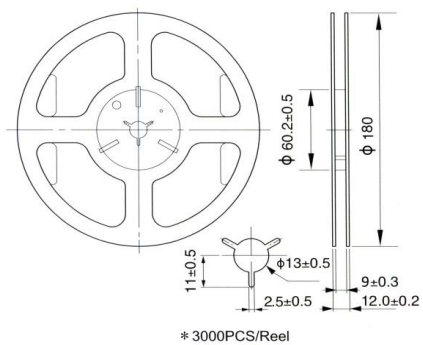

＊3000PCS/Reel

● TAPE SPECIFICATION(mm)

