


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00025	Connector, dc jack, 5.5x2.1xL17.4 mm, molding style	1	
2	30-00405	Wire, 2C TS, 24 AWG, UL2468, 300V, 80C, 3.0 mm, VW-1, PVC, 87A, white	1	
3	24-00004	Overmold, PVC, white	1	

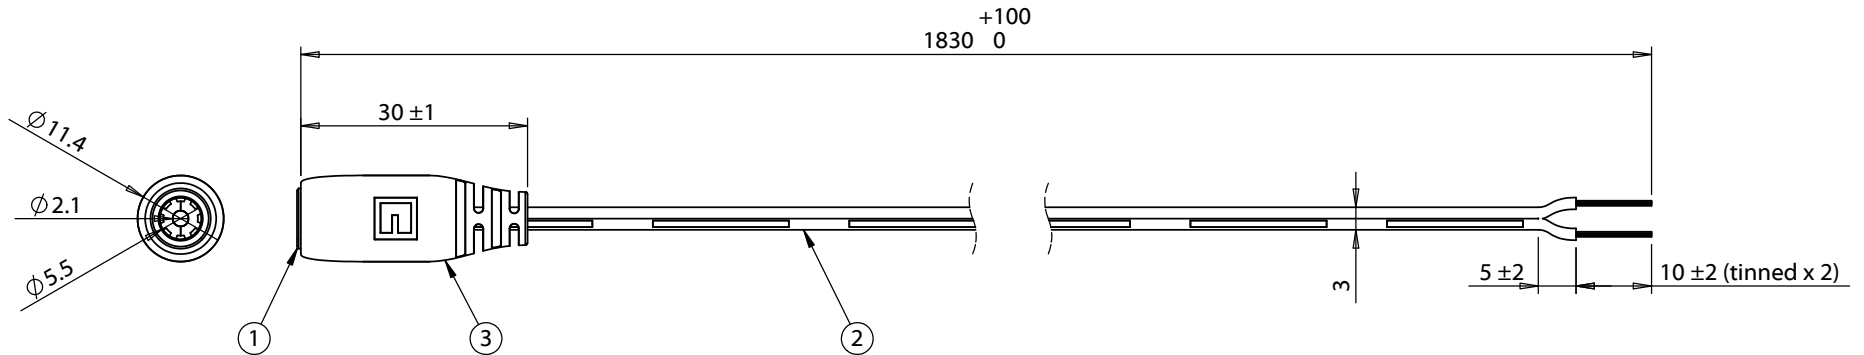

**Notes:**

Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted

4 A, 12 Vdc

Wiring Diagram	
50-00025	wire color
center	white with stripe
sleeve	white

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant Function test: no open, no short circuit, no intermittent Description: Cable, 1830 mm, 5.5x2.1 mm 50-00025 dc jack to stripped tinned, 24 AWG, 30-00405 wire, white	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	12/21/2015	Initial release	GL 2016.05.18 16:02:18 -07'00'		
			Verified: LA <small>Digitally signed by LA, DN: cn=LA, o=Tensility, ou=Engineering, email=LA@TENSILITY.COM, c=US</small> <small>Date: 2016.05.02 17:18:44 -07'00'</small>		
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm		
				Size: A	Part number: 10-01263
				Scale: 1:2	Sheet 1 of 1