ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	TLY-1P	NEMA 1-15P, polarized	1	black overmold
2	30-00242	2C, 18 AWG, UL SPT-1, 300V, 105C, 5.55 mm, VW-1, PVC	1	

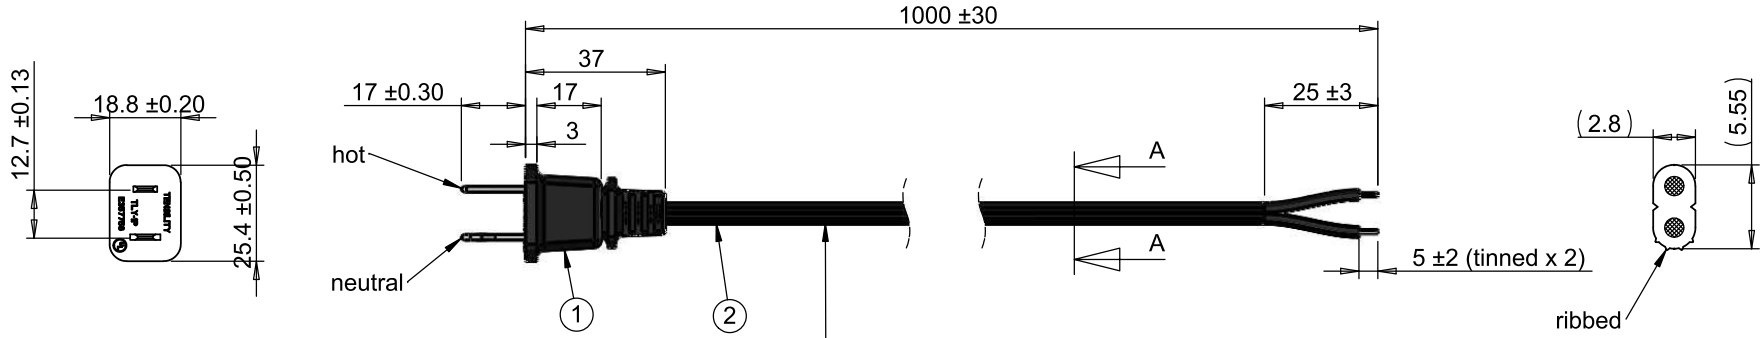

Wire marking: (UL) E339575 SPT-1 2x0.824 mm2
(18AWG) 105C 300V VW-1 C(UL) SPT-1 2x0.824 mm2
(18AWG) 105C 300 V VW-1 Tensility HLE

Wiring Diagram	
1-15P	wire
hot	smooth
neutral	ribbed

Notes:
Electrical requirements: 10 A at 125 Vac

Revision:	Date:	Description:
A	12/17/2012	Intial release

Prepared: DN Digitally signed by DN Date: 2017.01.26 10:42:41 -08'00'

Verified: PS Digitally signed by PS Date: 2017.01.26 14:37:18 -08'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:
RoHS compliant
Function test: no open, no short circuit, no intermittent

Description:
Ac cord, 1000 mm, U.S, NEMA 1-15P plug, TLY-1P to tinned, 18 AWG, SPT-1 wire, 30-00242

TENSILITY
tel 1.541.323.3228 800 877.670.7118
fax 1.541.323.4202 web tensility.com

Size: A
Part number: 11-00018
Scale: 1:1
Sheet 1 of 1

5 4 3 2 1