



Specifications:


Current Rating:3.0A AC,DC
 Voltage Rating:250V AC, DC
 Contact Resistance:20m ohm Max
 Insulation Resistance:1,000M ohm Min
 Withstanding Voltage:600V AC/minute
 Operating Temperature Range:-40°C ~ +105°C

Materials:

Insulator:Nylon 9T(UL94V-0)
 Insulator Color:Black
 Contact:Brass
 Finish: Gold Plated

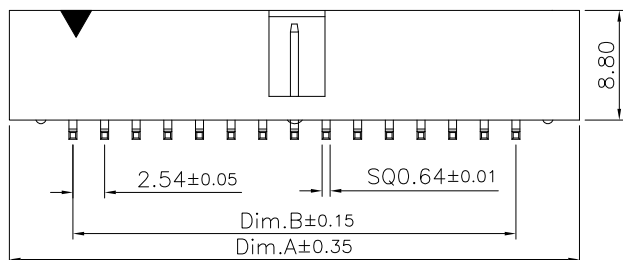

Pos	Dim A	Dim B	Dim C
6	15.24	5.08	12.94
8	17.78	7.62	15.48
10	20.32	10.16	18.02
14	25.40	15.24	23.10
16	27.94	17.78	25.64
20	33.02	22.86	30.72
26	40.64	30.48	38.34
40	58.42	48.26	56.12
50	71.12	60.96	68.82

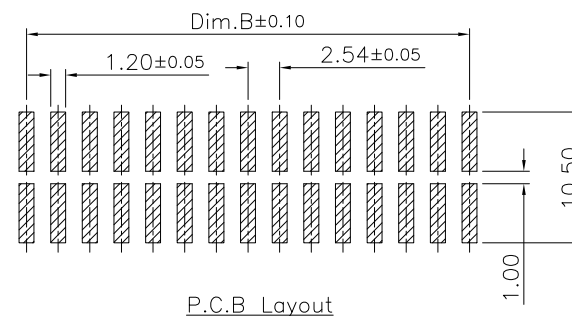

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	<h1 style="color: red; text-align: center;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>	
				CHECKED:	UNIT: MM		
					SCALE:1:1		A4
A	01-FEB-2021			APPROVAL:	SHEET: 1 / 2	PART NO:	
REV	DATE	FILE	BY		PROJECTION:	3020-XX-0300-00	