

MIRELLA-G2-W

~35° wide beam. Compatible with LEDiL HEKLA.

TECHNICAL SPECIFICATIONS:

Ø 49.9 mm **Dimensions** Height 22.6 mm socket Fastening **ROHS** compliant yes 🕕



MATERIAL SPECIFICATIONS:

Colour **Finish** Component **Type** Material Coating MIRELLA-G2-W Reflector PC metal


ORDERING INFORMATION:

» Box size: 480 x 280 x 300 mm

Component Qty in box MOQ MPQ Box weight (kg)


336 F15560_MIRELLA-G2-W 28 3.3

PRODUCT DATASHEET F15560_MIRELLA-G2-W

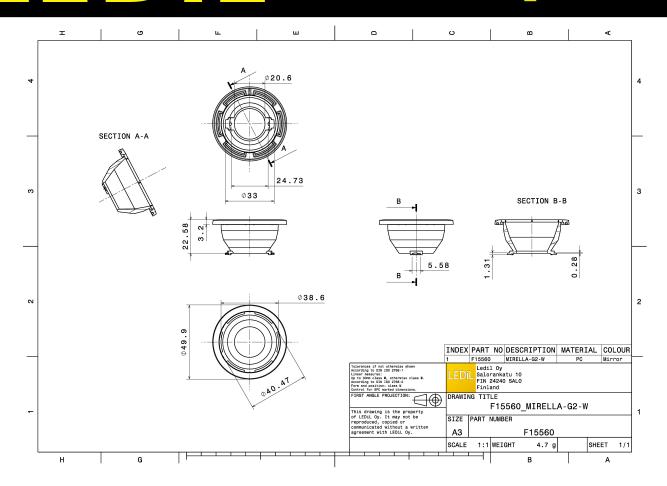


See also our general installation guide: www.ledil.com/installation_guide



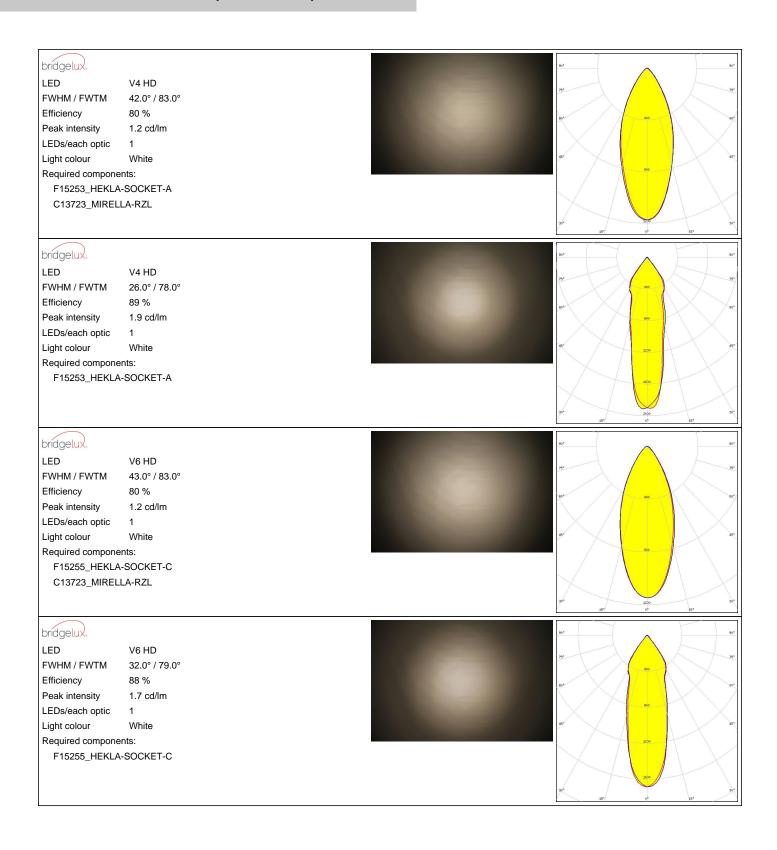


3/26



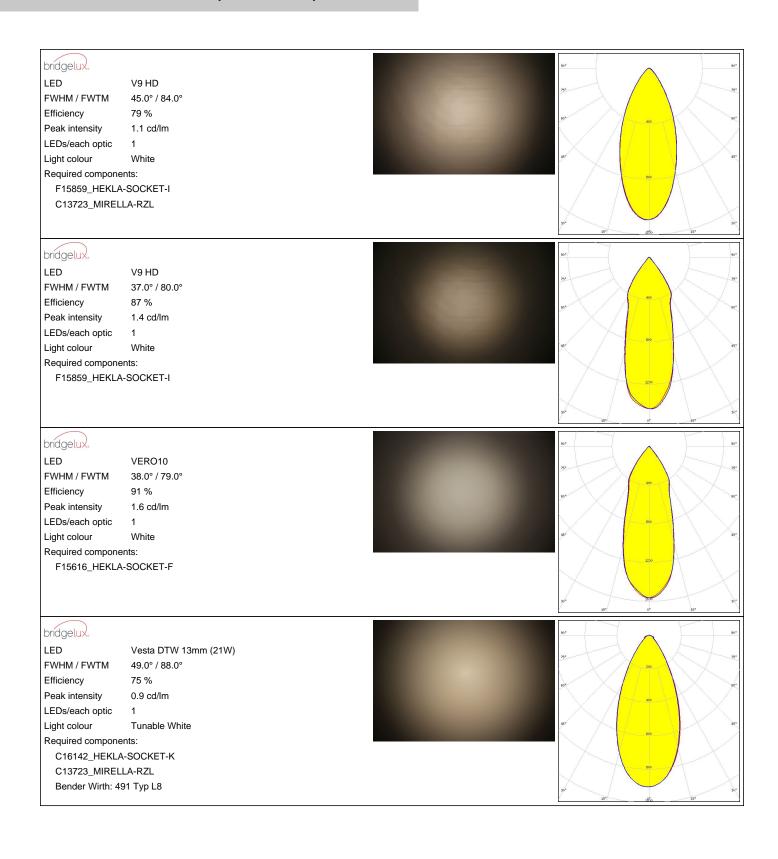



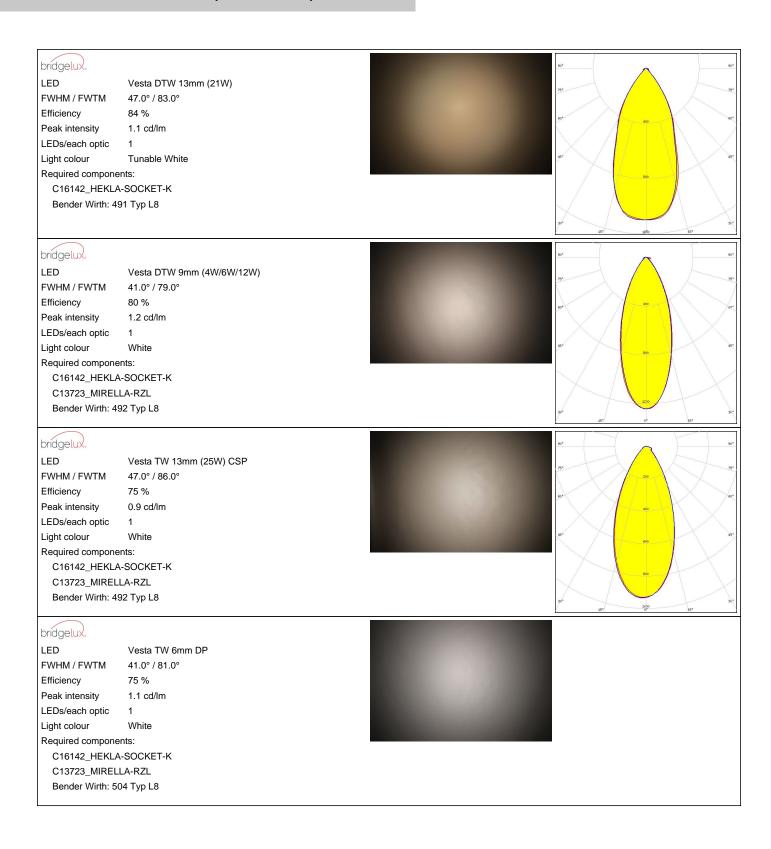





LED Vesta TW 6mm DP $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 29.0° / 75.0° Efficiency 83 % Peak intensity 1.8 cd/lm LEDs/each optic Light colour White Required components: C16142_HEKLA-SOCKET-K




bridgelux

Vesta TW 9mm (12W) CSP LED

FWHM / FWTM 34.0° / 76.0° Efficiency 88 % Peak intensity 1.7 cd/lm LEDs/each optic 1 White Light colour Required components:

Bender Wirth: 504 Typ L8

C16142_HEKLA-SOCKET-K Bender Wirth: 490 Typ L8

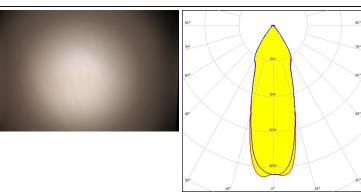


bridgelux

LED Vesta TW 9mm (12W) CSP

FWHM / FWTM 40.0° / 80.0° Efficiency 78 % Peak intensity 1.2 cd/lm LEDs/each optic Light colour White Required components: C16142_HEKLA-SOCKET-K


C13723_MIRELLA-RZL Bender Wirth: 489 Typ L8

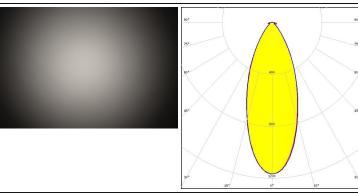

CITIZEN

CLC020 Series (Dim-To-Warm)

FWHM / FWTM 36.0° / 76.0° Efficiency 85 % Peak intensity 1.6 cd/lm LEDs/each optic White Light colour Required components: C16142_HEKLA-SOCKET-K




Published: 11/07/2019




CITIZEN CLC020 Series (Dim-To-Warm) $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 42.0° / 81.0° Efficiency 77 % Peak intensity 1.1 cd/lm LEDs/each optic Light colour White Required components: C16142_HEKLA-SOCKET-K C13723_MIRELLA-RZL Bender Wirth: 487 Typ L8 **CITIZEN** LED CLU025/CLU027 (LES 6) FWHM / FWTM 31.0° / 77.0° Efficiency 90 % Peak intensity 1.9 cd/lm LEDs/each optic 1 White Light colour Required components: F15255_HEKLA-SOCKET-C **CITIZEN** CLU700/701/702 LED $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 29.0° / 77.0° Efficiency 92 % Peak intensity 2 cd/lm LEDs/each optic Light colour White Required components: F15255_HEKLA-SOCKET-C **CITIZEN** CLU700/701/702 FWHM / FWTM 29.0° / 77.0° Efficiency 91 % Peak intensity 2 cd/lm LEDs/each optic White Light colour Required components: F15255_HEKLA-SOCKET-C C13723_MIRELLA-RZL

8/26




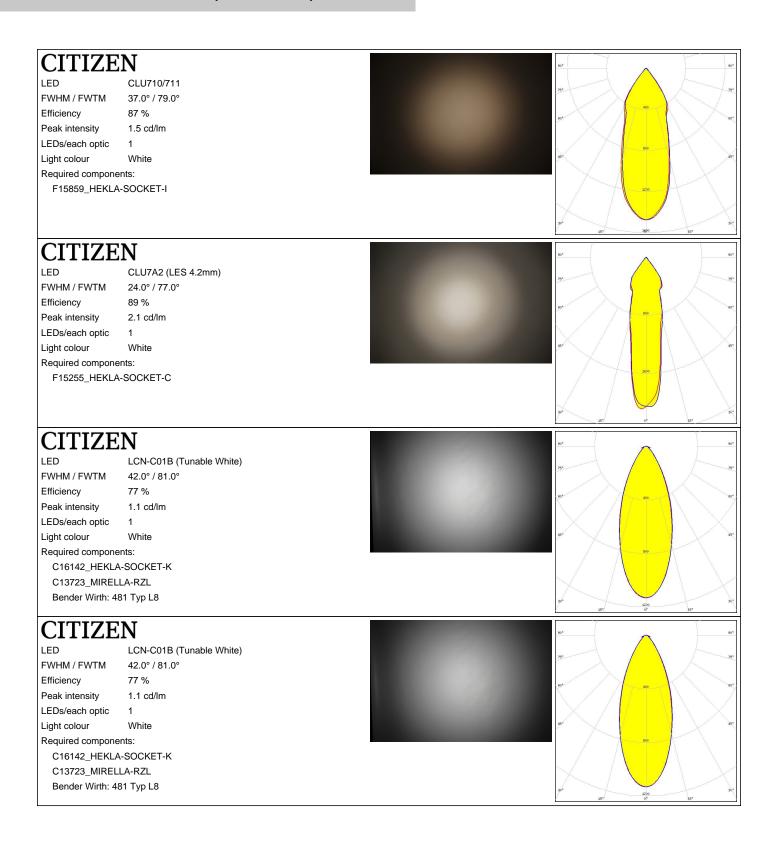




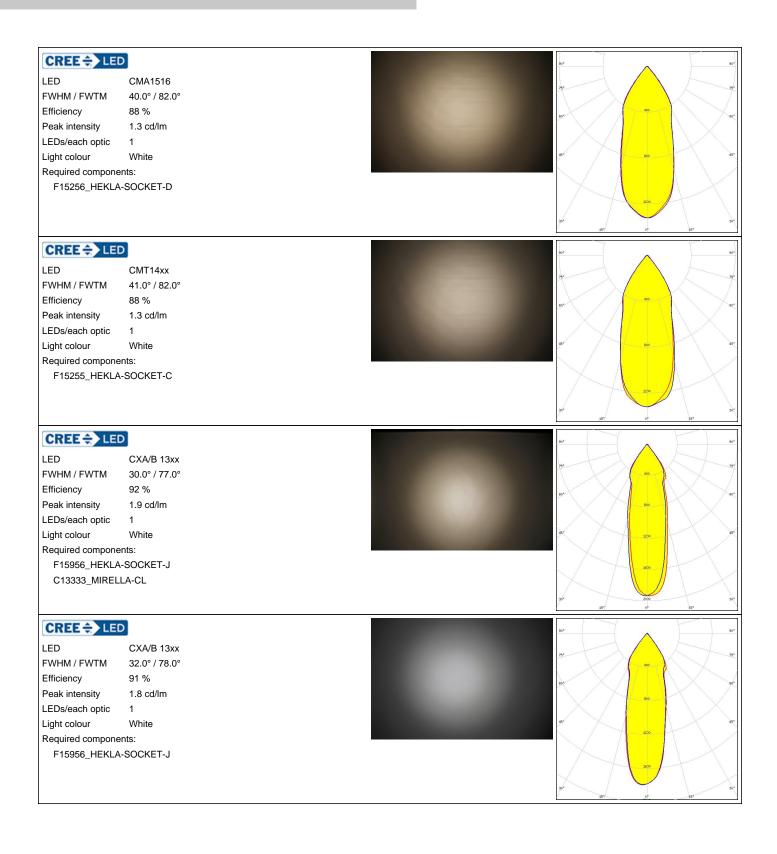




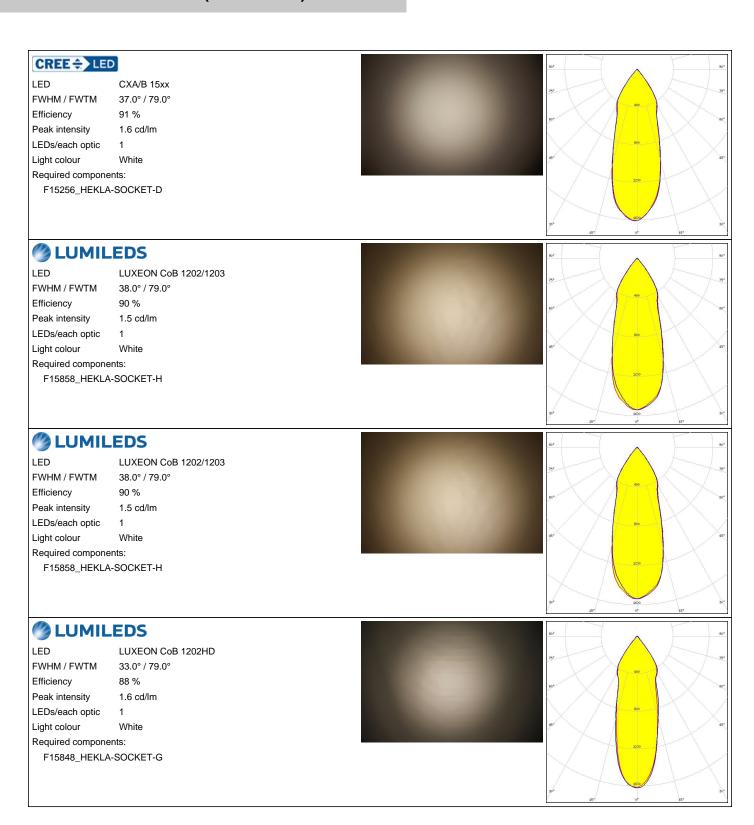




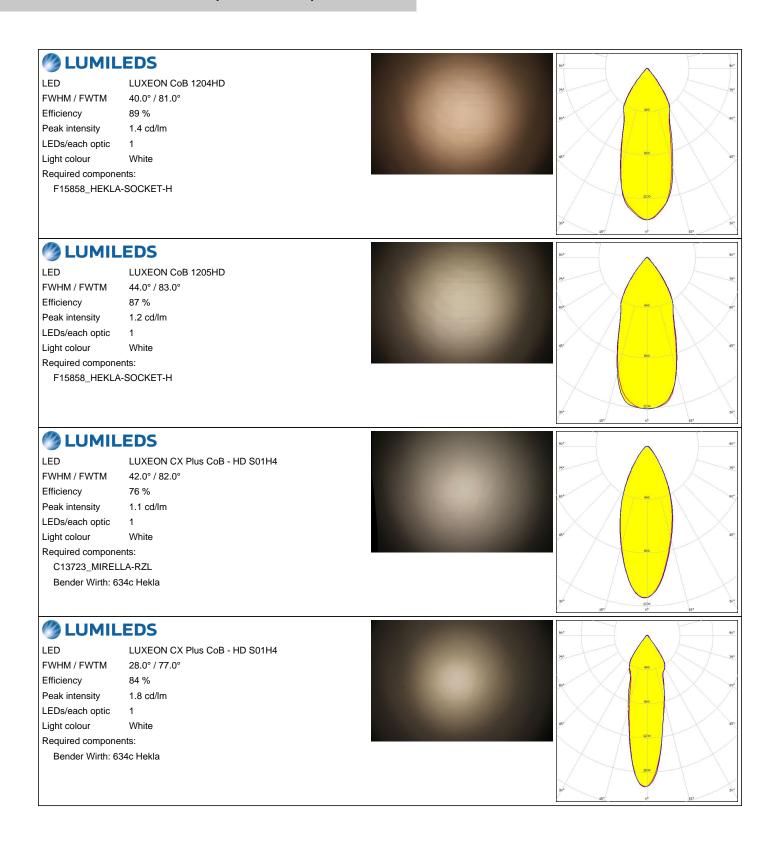




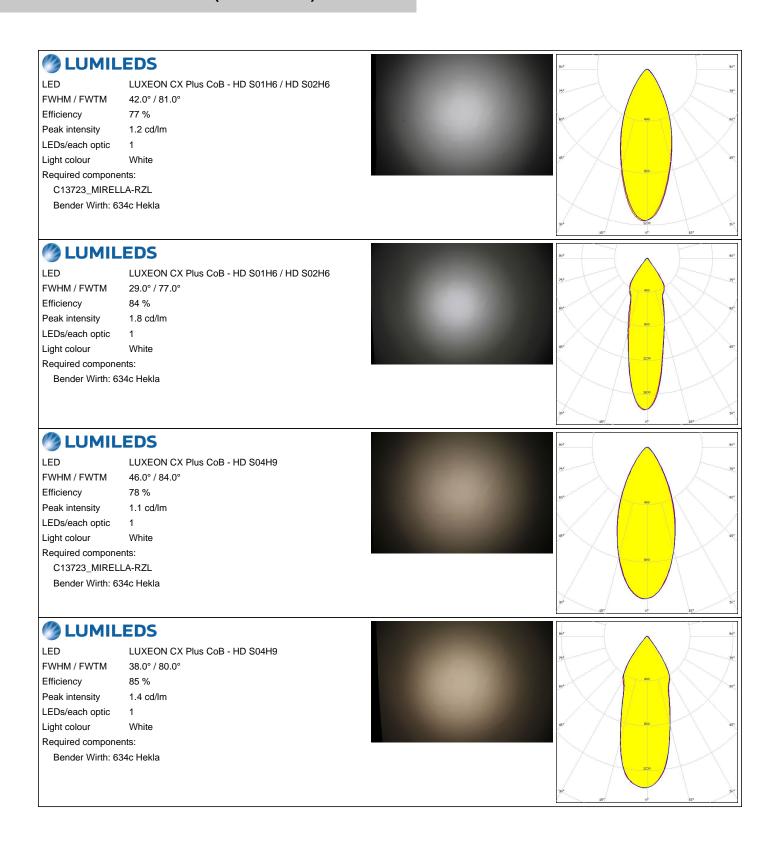




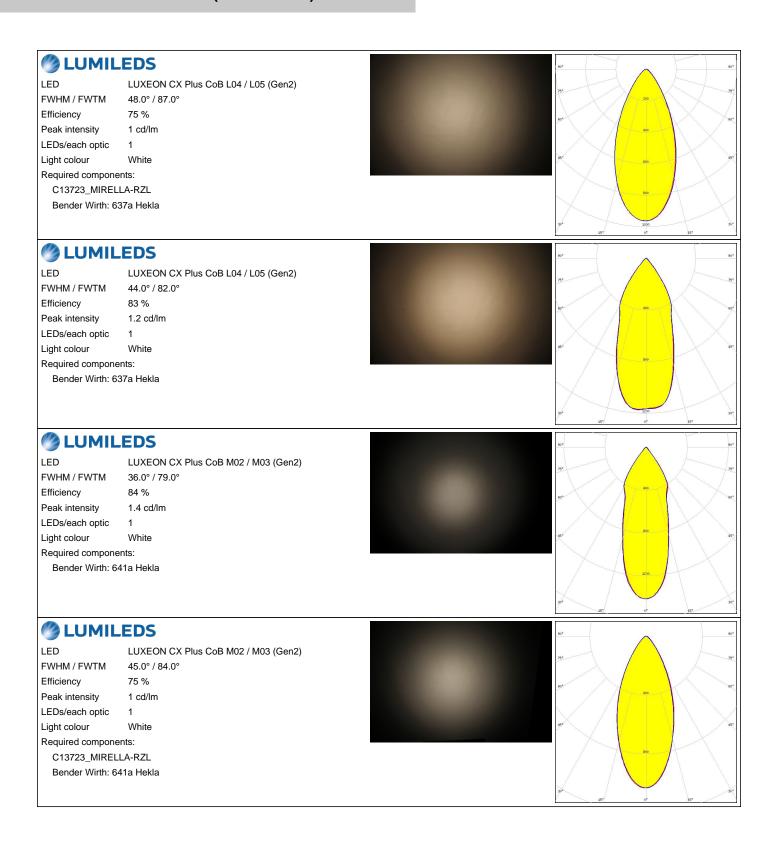




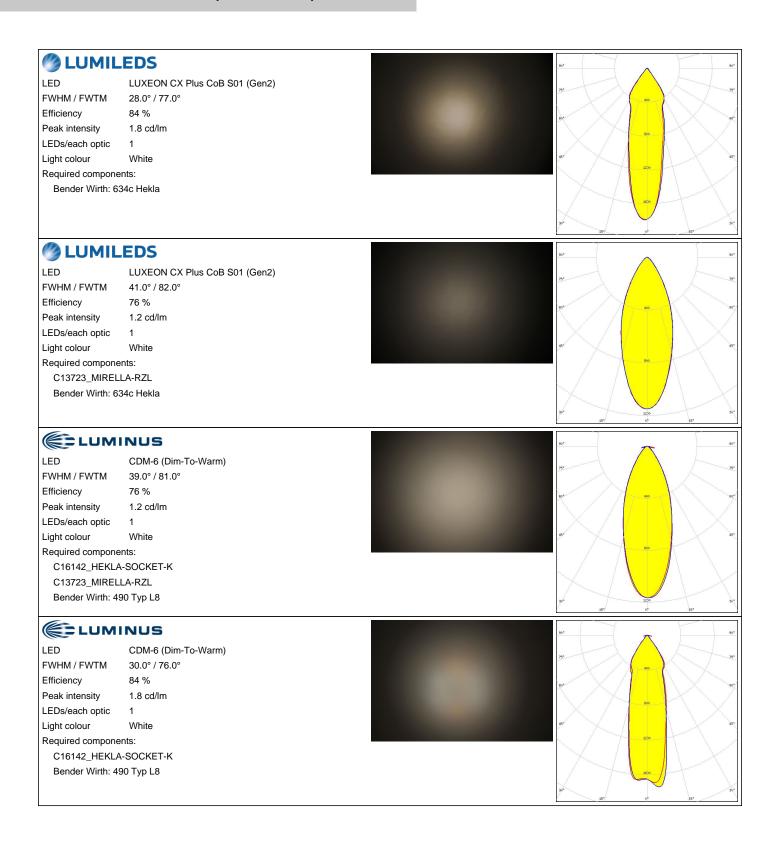




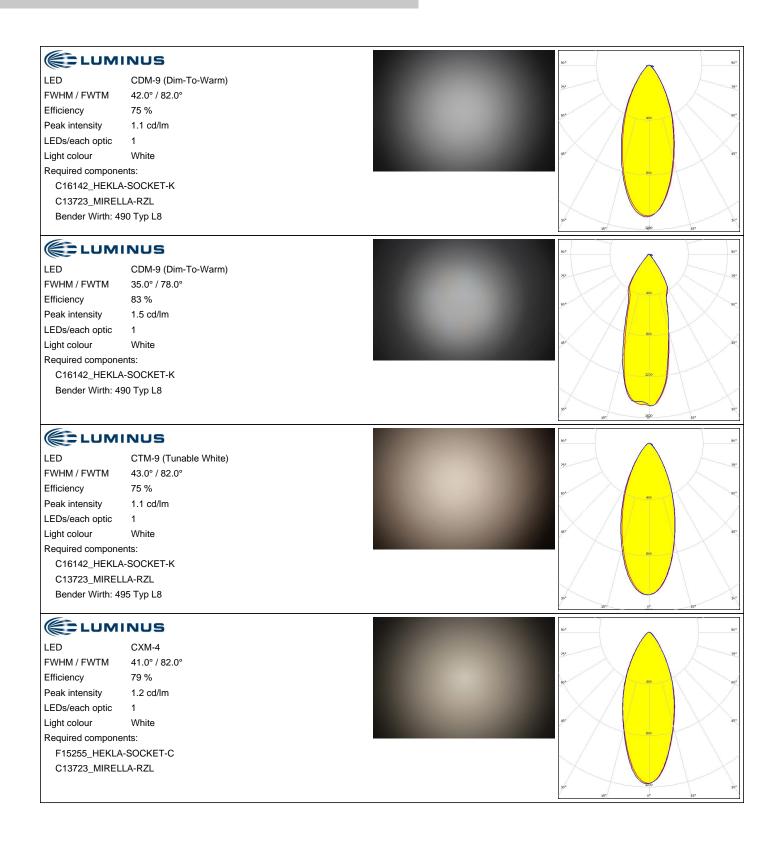



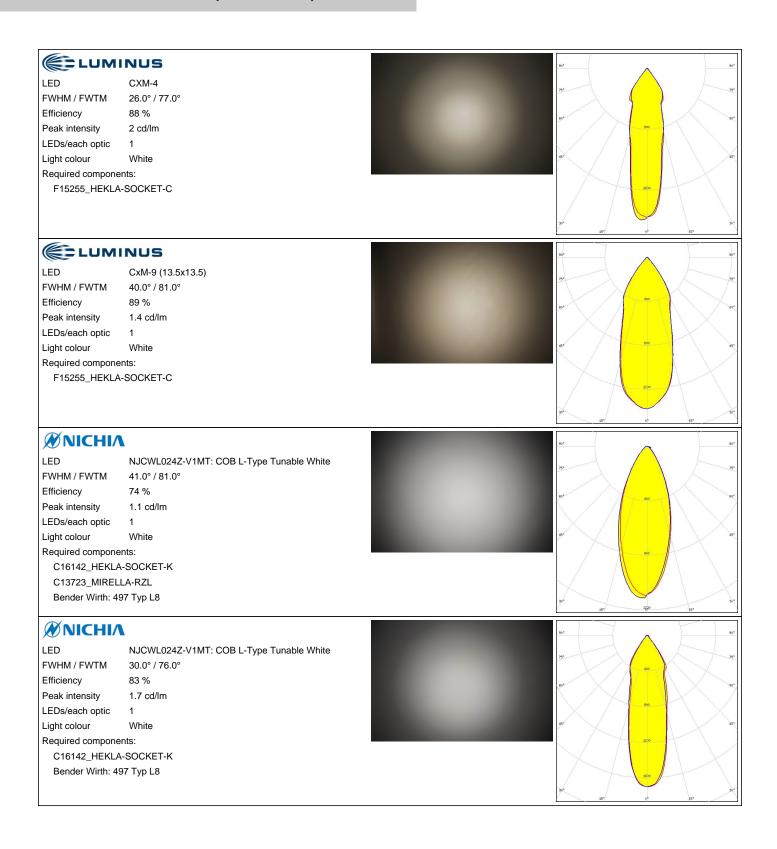



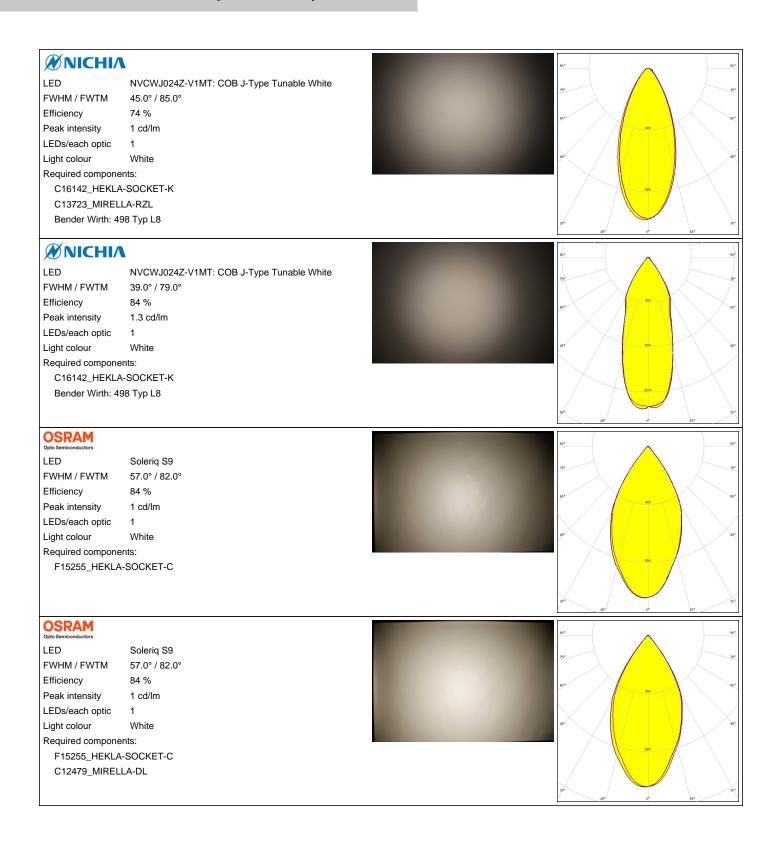




PHILIPS

LED Fortimo SLM L09 CoB

FWHM / FWTM 46.0° / 85.0°
Efficiency 79 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White

Required components: F15858 HEKLA-SOCKET-

F15858_HEKLA-SOCKET-H C13723_MIRELLA-RZL



PHILIPS

LED Fortimo SLM L09 CoB

FWHM / FWTM 39.0° / 81.0°


Efficiency 88 %

Peak intensity 1.4 cd/lm

LEDs/each optic 1

Light colour White

Required components: F15858_HEKLA-SOCKET-H

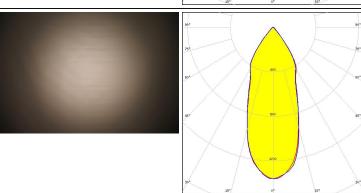


PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 47.0° / 82.0° Efficiency 83 % Peak intensity 1.1 cd/lm LEDs/each optic 1

Light colour White Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 432 Typ L8

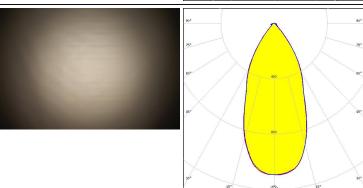

PHILIPS

Required components:

LED Fortimo SLM L13 CoB

FWHM / FWTM 47.0° / 83.0°
Efficiency 83 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White

C16142_HEKLA-SOCKET-K Bender Wirth: 432 Typ L8



Published: 11/07/2019



PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 49.0° / 87.0°
Efficiency 77 %

Peak intensity 0.9 cd/lm

LEDs/each optic 1

Light colour White

Required components: C16142_HEKLA-SOCKET-K

C16142_HEKLA-SOCKET-K C13723_MIRELLA-RZL Bender Wirth: 432 Typ L8




PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 49.0° / 86.0°
Efficiency 77 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K C13723_MIRELLA-RZL Bender Wirth: 432 Typ L8

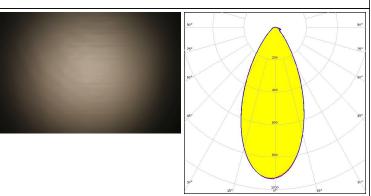

SAMSUNG

 LED
 LC010C G2


 FWHM / FWTM
 29.0° / 78.0°

 Efficiency
 88 %

 Peak intensity
 1.8 cd/lm

 LEDs/each optic
 1

Light colour White
Required components:
F15255_HEKLA-SOCKET-C

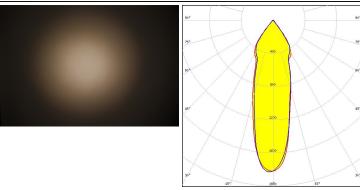


SAMSUNG

LED LC010T (Tunable White)

FWHM / FWTM 37.0° / 75.0° Efficiency 79 % Peak intensity 1.3 cd/lm LEDs/each optic 1

Light colour Tunable White

Required components:
C16142_HEKLA-SOCKET-K
C14658_BARBARA-RZ-LENS
Bender Wirth: 501 Typ L8

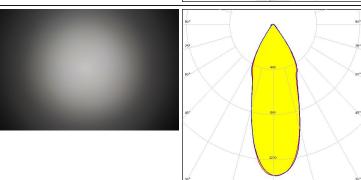

Published: 11/07/2019



SAMSUNG


LED LC010T (Tunable White)

FWHM / FWTM 36.0° / 77.0° Efficiency 84 % Peak intensity 1.4 cd/lm LEDs/each optic 1

Light colour Tunable White

Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 501 Typ L8

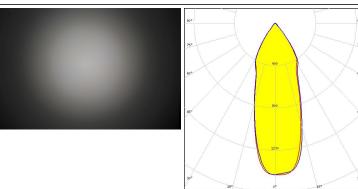


SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 53.0° / 87.0°
Efficiency 79 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15859_HEKLA-SOCKET-I C12479_MIRELLA-DL

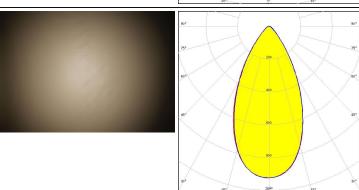


SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 52.0° / 85.0°
Efficiency 87 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

equired components: F15859_HEKLA-SOCKET-I

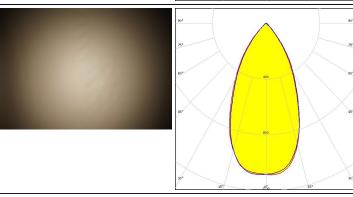

SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 51.0° / 90.0°
Efficiency 77 %


Peak intensity 0.9 cd/lm

LEDs/each optic 1

Light colour White

Required components:

F15859_HEKLA-SOCKET-I C13723_MIRELLA-RZL

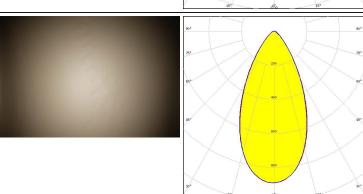

20/26




SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 53.0° / 83.0°
Efficiency 82 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:


F15859_HEKLA-SOCKET-I C13333_MIRELLA-CL

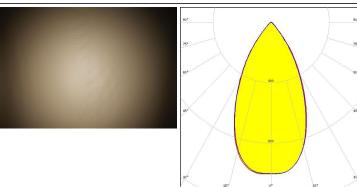


SAMSUNG

LED LC020C
FWHM / FWTM 36.0° / 79.0°
Efficiency 90 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1

Light colour White
Required components:
F15848_HEKLA-SOCKET-G







SAMSUNG

LED LC020C G2
FWHM / FWTM 38.0° / 80.0°
Efficiency 87 %
Peak intensity 1.4 cd/lm

LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I





TRIDONIC


Light colour

LED SLE G7 LES09
FWHM / FWTM 46.0° / 85.0°
Efficiency 82 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1

White


Required components: F15255_HEKLA-SOCKET-C C13723_MIRELLA-RZL






Published: 11/07/2019




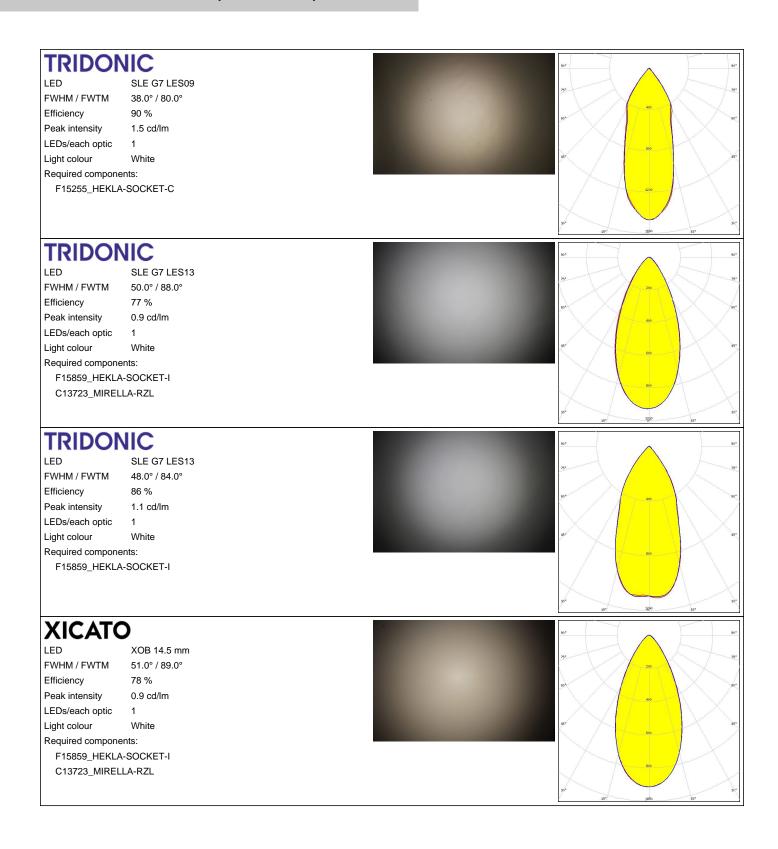



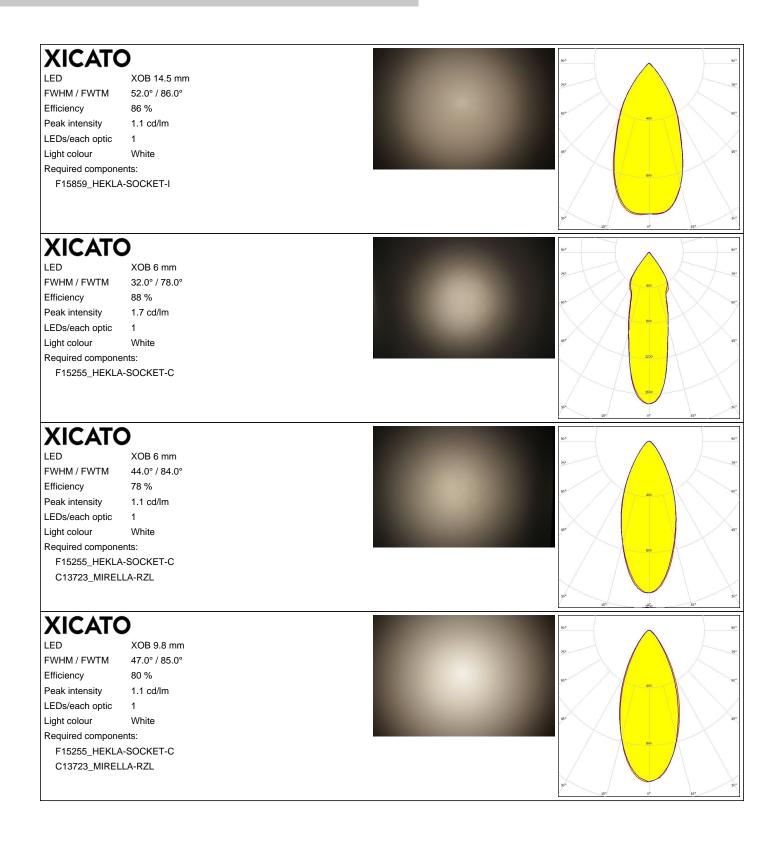



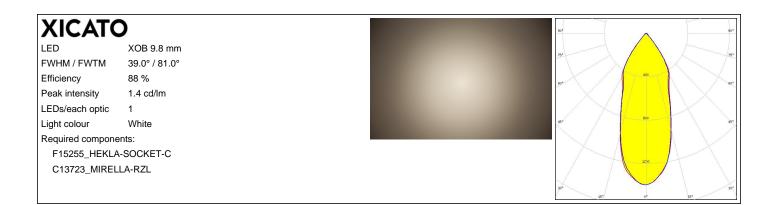



PHOTOMETRIC DATA (SIMULATED):


bridgelux

LED VERO13 FWHM / FWTM 39.0° / 75.0°

Efficiency 87 % Peak intensity 1.5 cd/lm

LEDs/each optic 1
Light colour White

C16142_HEKLA-SOCKET-K



CITIZEN

Required components:


LED CLL02x/CLU02x (LES10)

FWHM / FWTM 37.2° / 76.7°
Efficiency 88 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1

Light colour White

Required components:

F15255_HEKLA-SOCKET-C



WNICHIA


LED COB L-Type (LES 11)

FWHM / FWTM 42.0° / 78.0°
Efficiency 90 %
Peak intensity 1.5 cd/lm

LEDs/each optic 1
Light colour White

Required components:

F15858_HEKLA-SOCKET-H




WNICHIA

LED COB T-Type FWHM / FWTM 30.0° / 75.0°

Efficiency 88 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15848_HEKLA-SOCKET-G



Published: 11/07/2019



PRODUCT DATASHEET F15560_MIRELLA-G2-W

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405, Block B **Casic Motor Building** Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where to buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy