
KEMET Part Number: M3253505E1B103JZMB

(C1206K103J1EML)

SMD MIL C0G PRF32535, Ceramic, 0.01 uF, 5%, 100 VDC, C0G, SMD, Low ESR, MIL-PRF-32535, N/A, 1206

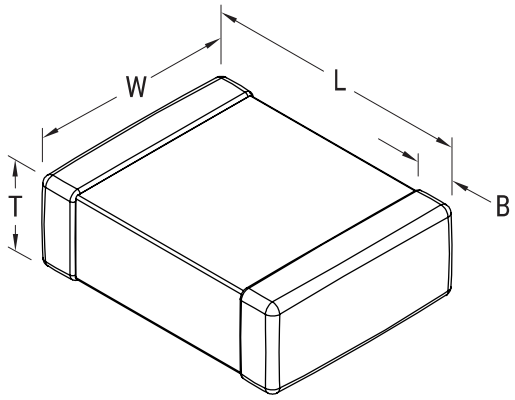

Dimensions	
Chip Size	1206
L	3.2mm +0.3/-0.25mm (0.126 in +0.012/-0.01 in)
W	1.6mm +0.3/-0.25mm (0.063 in +0.012/-0.01 in)
T	1.8mm MAX (0.071 in MAX)
B	0.51mm +/-0.36mm (0.02 in +/-0.014 in)

Packaging Specifications	
Packaging:	Waffle
Packaging Quantity:	126

General Information	
Series:	SMD MIL C0G PRF32535
Style:	SMD Chip
Description:	SMD, Low ESR, MIL-PRF-32535
RoHS:	No
Prop 65:	**WARNING:** Cancer and reproductive harm - www.p65warnings.ca.gov.
SCIP Number:	d66873f5-e54d-410c-a0cf-ebf6fcf635b5
Termination:	Solder Plated
Failure Rate:	N/A
Qualifications:	MIL-PRF-32535 M-Level
AEC-Q200:	No
Shelf Life:	78 Weeks
MSL:	1

Specifications	
Capacitance:	0.01 uF
Capacitance Tolerance:	5%
Voltage DC:	100 VDC
Dielectric Withstanding Voltage:	250 VDC
Temperature Range:	-55/+125°C
Temperature Coefficient:	C0G
Dissipation Factor:	0.15% 1 MHz 25C
Aging Rate:	0% Loss/Decade Hour
Insulation Resistance:	100 GOhms

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

© 2006 - 2022 KEMET