www.lemo.com

# GMA.1B.054.DG

## SUMMARY

**# Wires**



*Image is for illustrative purpose only*

| | |
|---|---|
| **Series** | 1B |
| **Termination type** | No contacts / Accessory |
| **IP rating** | 0 |
| **AWG wire size** | 0.00 - 0.00 |
| **Cable Ø** | 5.40 - 6.00 mm |
| **Status** | active |

### Download

Request a quote

Catalog

## TECHNICAL DETAILS

### Mechanics

| | |
|---|---|
| **Shell Style/Model** | GMA*: Bend relief Grey |
| **Keying** | No keying |
| **Housing Material** | Thermoplastic polyurethane elastomer (Elastollan 1185 A) |
| **Variant** | G : Gray |
| **Weight** | .94 g |

### Performance


| | |
|---|---|
| **Configuration** | |
| **Insulator** | G: PEEK/Pehd |
| **Rated Current** | |

### Others

Temp (min / max): -40°C / +80°C

*LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

# DRAWINGS

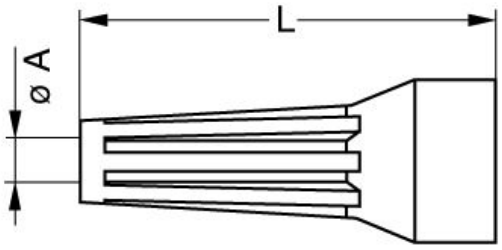


No keying

### Dimensions

| | A | L |
|---|---|---|
| mm. | 5.4 | 30 |
| in. | 0,21 | 1,18 |

# RECOMMENDED BY LEMO

### Tools

*LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*