

RoHS COMPLIANT


Pulse Electronics
www.pulseelectronics.com


NOTES:

1.CONNECTOR MATERIAL:
  HOUISING:PA66 BLACK UL94 V-0
  INSERTER:PBT BLACK UL94 V-0
  SHIELD:Brass
  SHIELD PLATING:NICKEL
  CONTACT:COOPER ALLOY
  CONTACT PLATING:SELECTIVE GOLD,15 MICRO-INCHS MIN IN CONTACT AREA
2.PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED SEE ELECTRICAL DRAWING FOR OMITTED PINS
3.RJ45 CAVITIES CONFORM TO FCC RULES AND REGULATION PART 68.
4.THE PART IS RECOMMENDDED FOR WAVE SOLDERING PROCESS PEAK SOLDERING TEMPERATURE IS 260° C MAX,10 SECS MAX
5.OPERATING TEMPERATURE T=0°C TO +70°C.
6.STORAGE TEMPERATURE T=-40°C TO +85°C.
7. PACKAGING INFORMATION: 50 PCS/ TRAY, 1200 PCS/BOX.



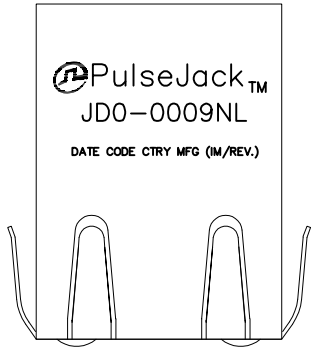

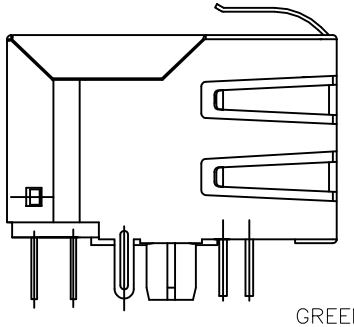


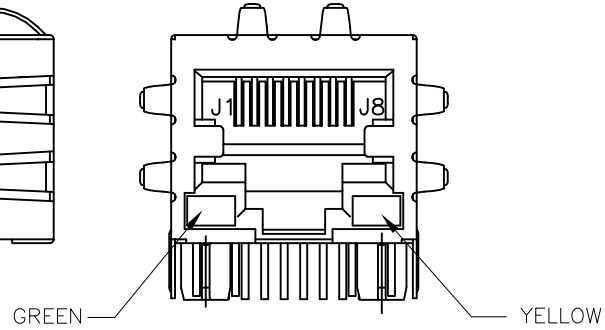

FINAL OUTLINE

© Copyright, 2016. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (03/17/16)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CONN,RJ45,1X1,100D,1:1,TY	JD0-0009NL-X01	-	1 OF 5	JD0-0009NL	A

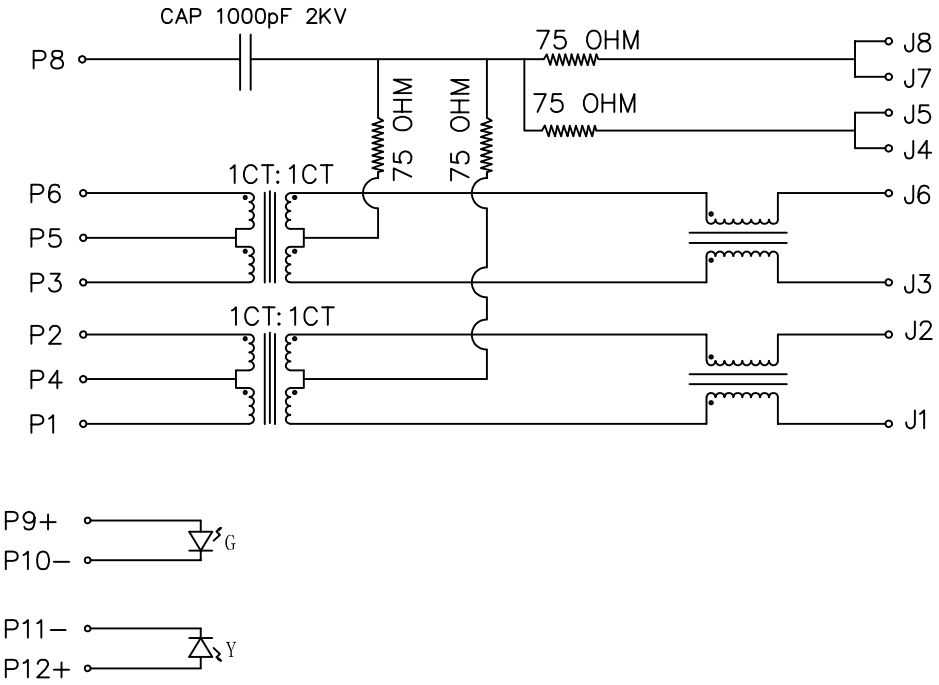

SCHEMATIC

ELECTRONICAL SPECIFICATIONS:

1.0 TURN RATIO @100KHz: (P1~P2):(J1~J2) = 1:1±5%
(P3~P6):(J3~J6) = 1:1±5%

2.0 PRIMARY INDUCTANCE: 350uH MIN @100KHZ,0.1V 8mA DC BIAS

3.0 DC RESISTANCE:(J1~J2):(J3~J6) 1.2 OHMS MAX

4.0 INSERTION LOSS: 1−100MHz −1.2dB MAX

5.0 RETURN LOSS: 1−30MHz −16dB MIN
30−60MHz −12dB MIN
60−80MHz −10dB MIN

6.0 CROSS TALK: 1−100MHz −30dB MIN

7.0 COMMON TO COMMON MODE ATTENUATION: 1−100MHz −30dB MIN

8.0 ISOLATION: PHY SIDE TO LINE SIDE: 1500VAC OR 2250VDC


LED SPECIFICATION:


STANDARD LED	WAVELENGTH	FORWARD V(max)	TYP
GREEN	565nm	2.4V	2.2V
YELLOW	590nm	2.5V	2.1V


*WITH A FORWARD CURRENT OF 20mA


© Copyright, 2016. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (03/17/16)

E−MAIL: PRODINFONETWORK@PULSEELECTRONICS.COM(US), ASIA@PULSEELECTRONICS.COM(Asia) PHONE: USA:858 674 8100, GERMANY:49 7032 78060, SINGAPORE:65 6287 8998, SHANGHAI:86 21 62787060, TAIWAN:886 3 4356768

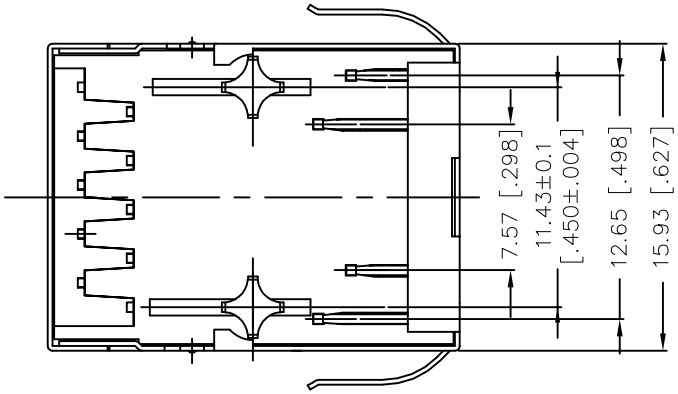

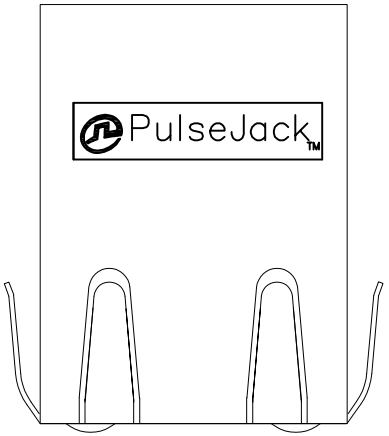

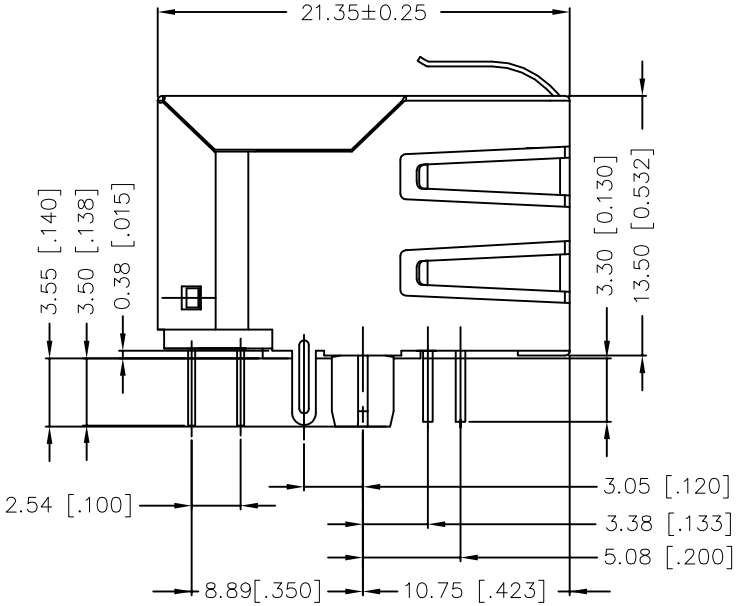


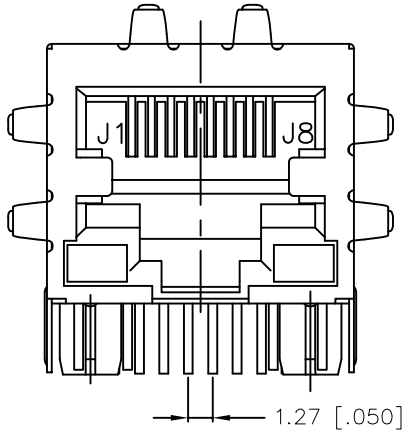


DIMENSIONS ARE IN MILLIMETERS [INCHES] WITH THE FOLLOWING TOLERANCES: [INCHES] ARE FOR REFERENCE ONLY.
X.XX= ±0.25 [±.010]

© Copyright, 2016. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (03/17/16)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CONN,RJ45,1X1,100D,1:1,TY	JD0-0009NL-X01	–	3 OF 5	JD0-0009NL	A

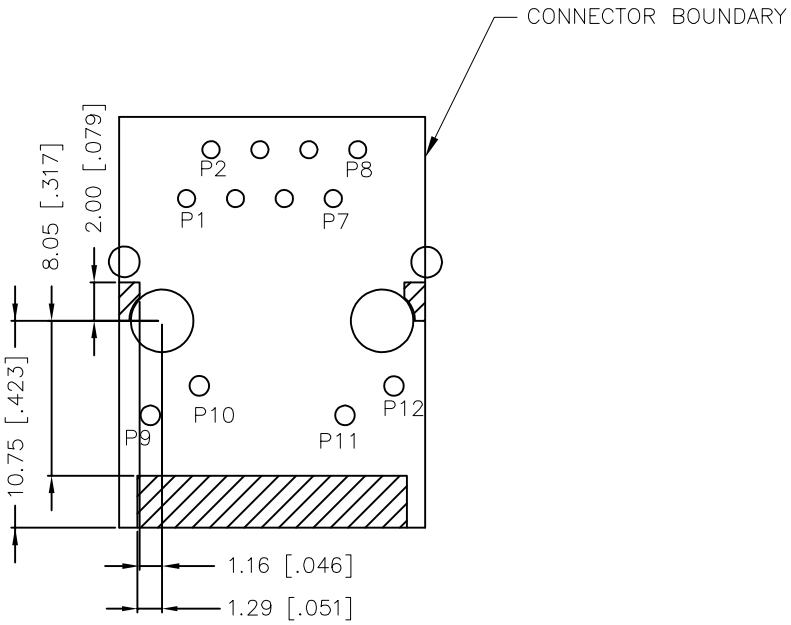

KEEP-OUT AREA (COMPONENT SIDE SHOWN)

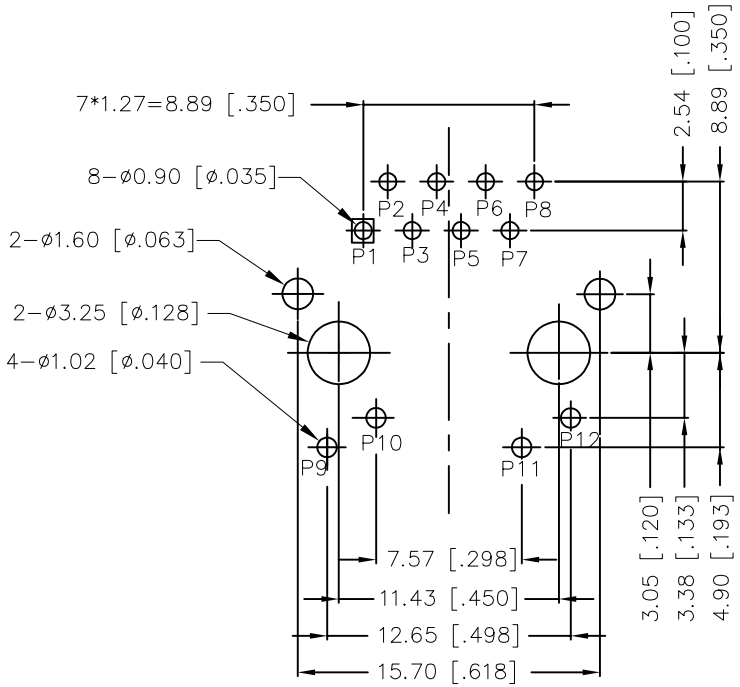


RECOMMENDED PWB LAYOUT
(COMPONENT SIDE SHOWN)

DIMENSIONS ARE IN MILLIMETERS [INCHES] WITH THE FOLLOWING
TOLERANCES: [INCHES] ARE FOR REFERENCE ONLY.
X.XX= ±0.10 [±.004]

© Copyright, 2016. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (03/17/16)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CONN,RJ45,1X1,100D,1:1,TY	JD0-0009NL-X01	-	4 OF 5	JD0-0009NL	A

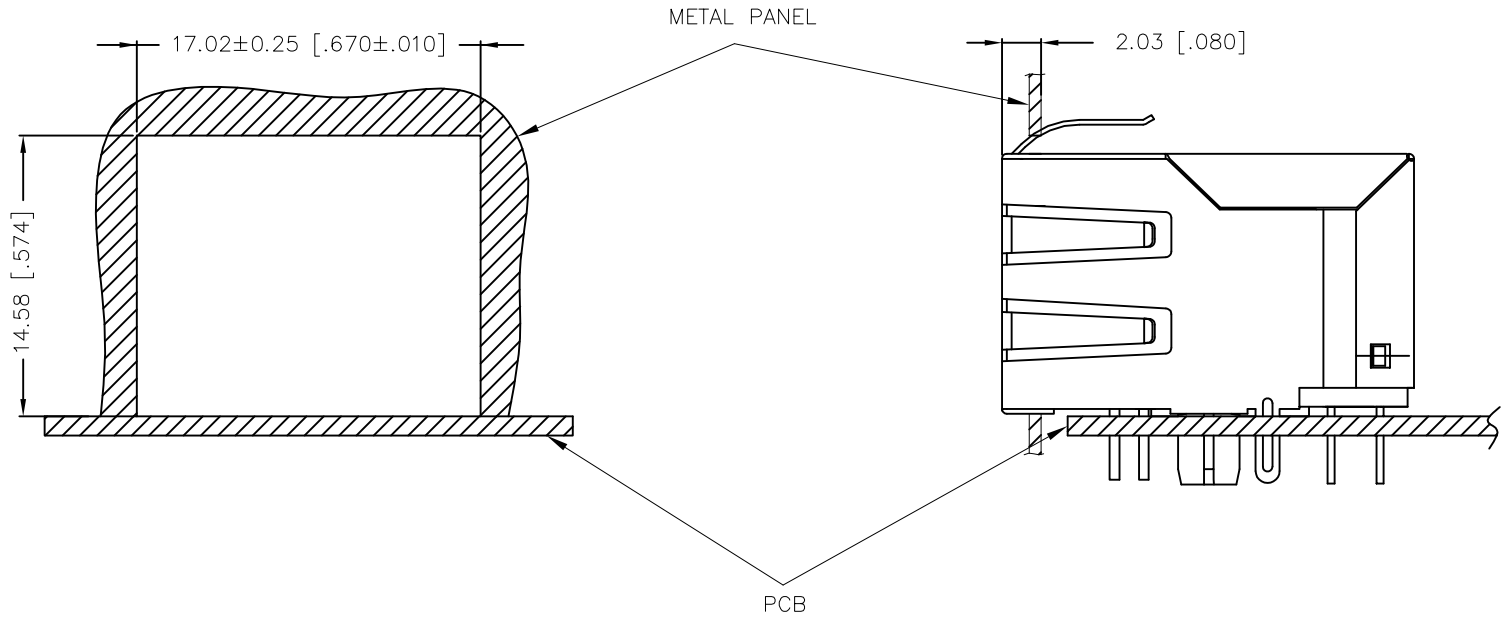

SUGGESTED PANEL CUTOUT

DIMENSIONS ARE IN MILLIMETERS [INCHES] WITH THE FOLLOWING
TOLERANCES: [INCHES] ARE FOR REFERENCE ONLY.
X.XX= ±0.10 [±.004]

© Copyright, 2016. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (03/17/16)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CONN,RJ45,1X1,100D,1:1,TY	JD0-0009NL-X01	–	5 OF 5	JD0-0009NL	A