

MOLLY-S

~25° spot beam

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 69.8 mm
Height	24.8 mm
ROHS compliant	yes ⓘ


MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
MOLLY-S	Single lens	PMMA	clear	



ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C15800_MOLLY-S » Box size: 480 x 280 x 300 mm	198	36	18	9.7


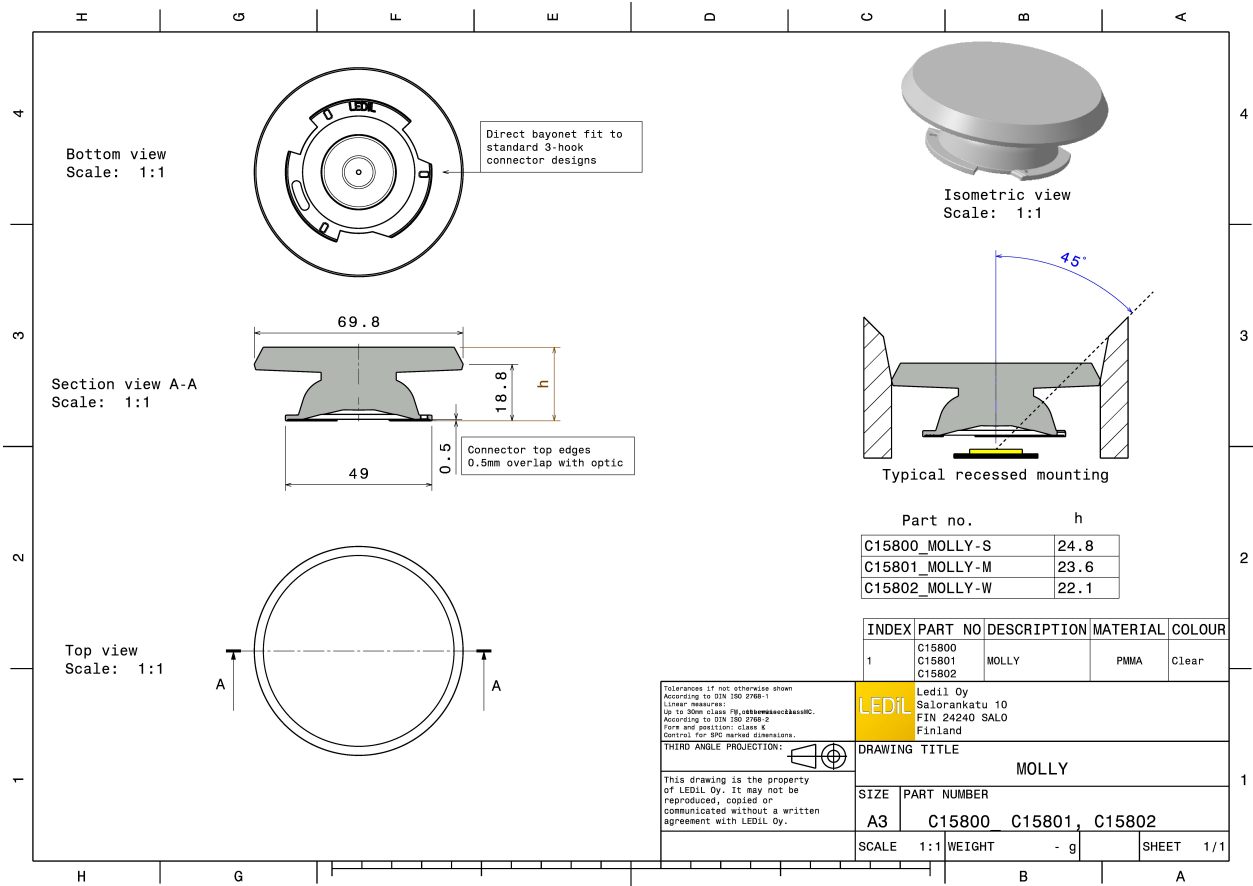


See also our general installation guide: www.ledil.com/installation_guide



PHOTOMETRIC DATA (MEASURED):



LED Vero SE 13
 FWHM / FWTM 23.0° / 40.0°
 Efficiency 90 %
 Peak intensity 4.2 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 C16402_CLAMP-VEROSE-13-18

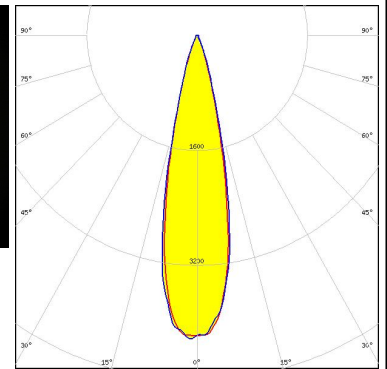
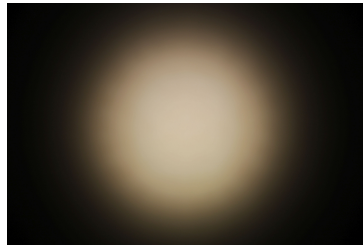


LED Vero SE 18
 FWHM / FWTM 31.0° / 54.0°
 Efficiency 88 %
 Peak intensity 2.4 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 C16402_CLAMP-VEROSE-13-18

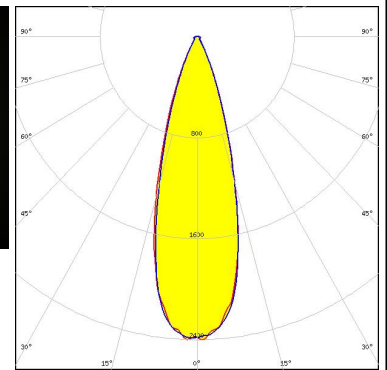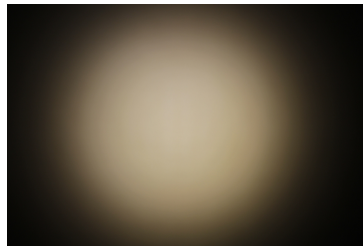



CITIZEN

LED CLL03x/CLU03x
 FWHM / FWTM 23.0° / 42.0°
 Efficiency 87 %
 Peak intensity 3.9 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 C13658_CLAMP-VERO13-18
 Bender Wirth: 433 Typ L1

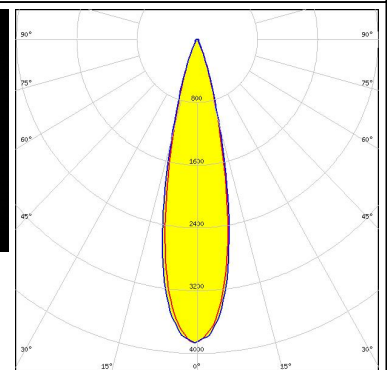
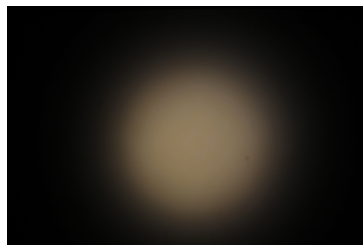

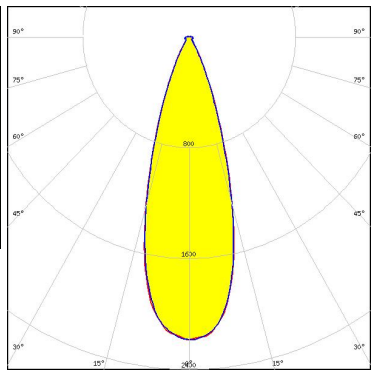

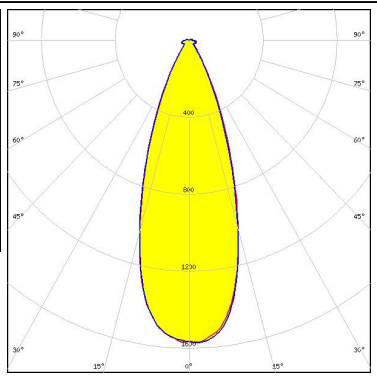
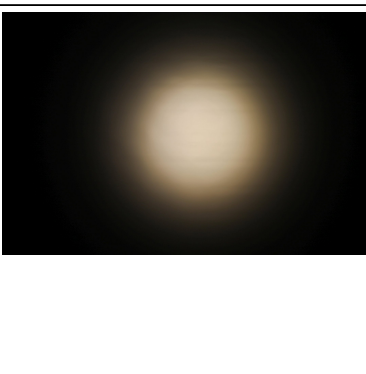
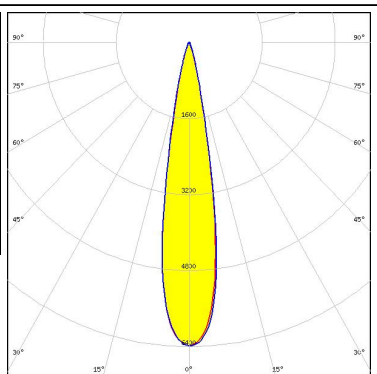


CITIZEN

LED CLL03x/CLU03x
 FWHM / FWTM 24.0° / 45.0°
 Efficiency 88 %
 Peak intensity 3.5 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 C16791_CLAMP-Z45-A
 TE Connectivity: 2325807-3

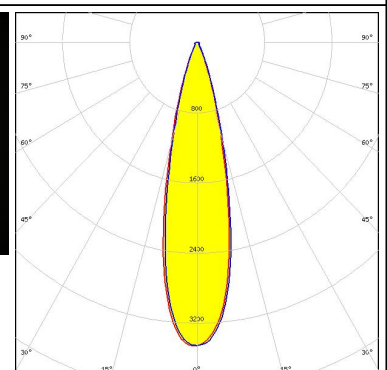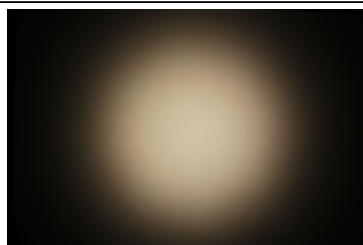



PHOTOMETRIC DATA (MEASURED):
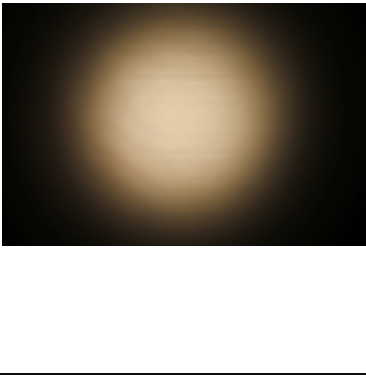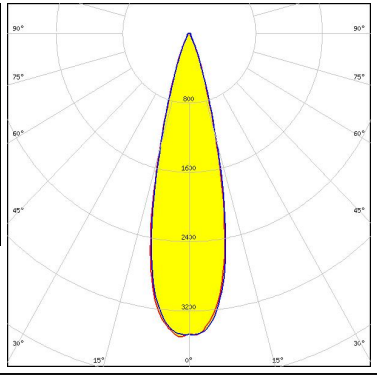
<p>CREE → LED</p> <p>LED CMA1840 FWHM / FWTM 26.0° / 44.0° Efficiency 91 % Peak intensity 3.5 cd/lm LEDs/each optic 1 Light colour White Required components: C14123_CLAMP-CXA15-18</p>		
<p>CREE → LED</p> <p>LED CMA2550 FWHM / FWTM 32.0° / 56.0° Efficiency 89 % Peak intensity 2.2 cd/lm LEDs/each optic 1 Light colour White Required components: C14036_CLAMP_CXA25-30</p>		
<p>CREE → LED</p> <p>LED CMA3090 FWHM / FWTM 37.0° / 64.0° Efficiency 86 % Peak intensity 1.6 cd/lm LEDs/each optic 1 Light colour White Required components: C14036_CLAMP_CXA25-30</p>		
<p>CREE → LED</p> <p>LED CMT14xx FWHM / FWTM 19.0° / 32.0° Efficiency 90 % Peak intensity 6.4 cd/lm LEDs/each optic 1 Light colour White Required components: C13658_CLAMP-VERO13-18 Bender Wirth: 434 Typ L1</p>		

PHOTOMETRIC DATA (MEASURED):



CREE LED

LED CMT19xx
 FWHM / FWTM 26.0° / 44.0°
 Efficiency 90 %
 Peak intensity 3.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C13658_CLAMP-VERO13-18
 Bender Wirth: 477 Typ L1

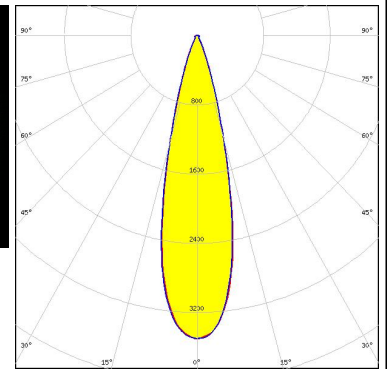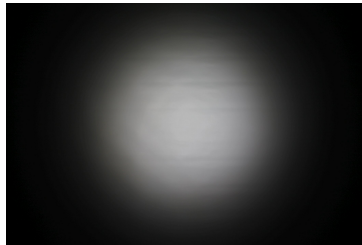


CREE LED

LED CMT28xx
 FWHM / FWTM 35.0° / 61.0°
 Efficiency 85 %
 Peak intensity 1.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C13584_CLAMP-VERO29
 Bender Wirth: 471 Typ L3

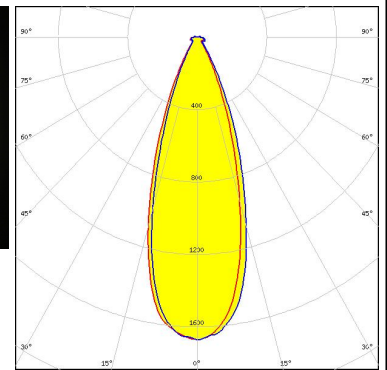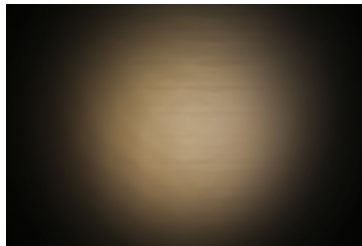



CREE LED

LED CXA/B 15xx
 FWHM / FWTM 17.0° / 30.0°
 Efficiency 91 %
 Peak intensity 7.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C14123_CLAMP-CXA15-18

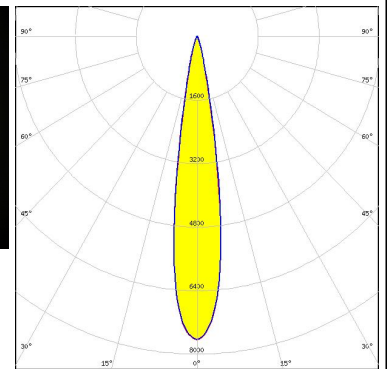

LUMILEDS



LED LUXEON CoB 1204HD
 FWHM / FWTM 18.0° / 31.0°
 Efficiency 89 %
 Peak intensity 7.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 TE Connectivity: 2213382-2 + OPTIC CLIP Z50 TYPE1 2213194-1

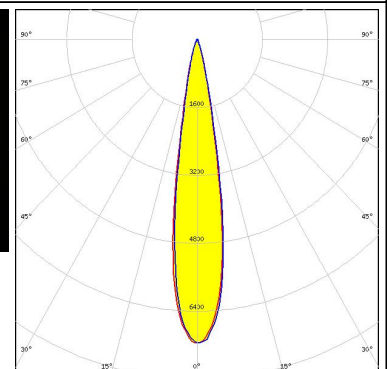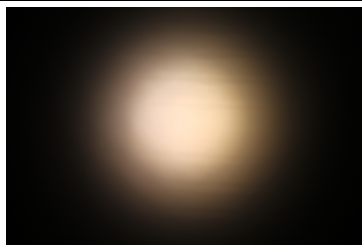

PHOTOMETRIC DATA (MEASURED):


OSRAM

LED PrevaLED Core G7 L15 H1
FWHM / FWTM 26.0° / 48.0°
Efficiency 89 %
Peak intensity 3.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16685_CLAMP-PRV-A

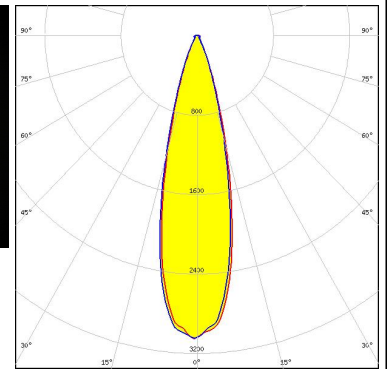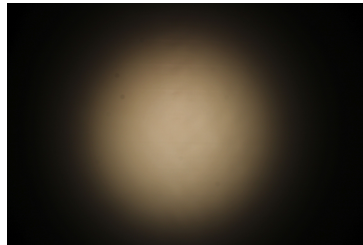



PHILIPS

LED Fortimo SLM L13 CoB
FWHM / FWTM 24.0° / 42.0°
Efficiency 89 %
Peak intensity 3.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:
TE Connectivity: 2213130-2 + OPTIC CLIP Z50 TYPE1 2213194-1

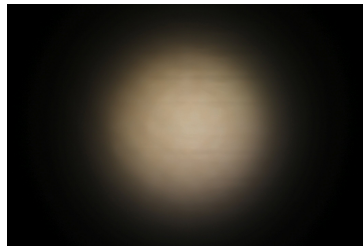



PHILIPS

LED Fortimo SLM L15 + SLM holder
FWHM / FWTM 26.0° / 47.0°
Efficiency 88 %
Peak intensity 3.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
TE Connectivity: OPTIC CLIP Z50 TYPE1 2213194-1

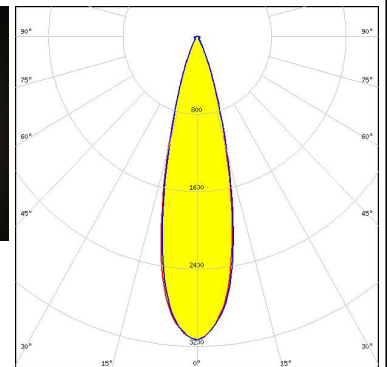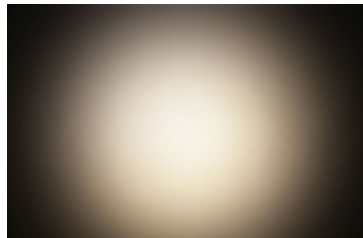

PHILIPS


LED Fortimo SLM L15 CoB
FWHM / FWTM 27.0° / 47.0°
Efficiency 88 %
Peak intensity 3.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
TE Connectivity: 2213130-2 + OPTIC CLIP Z50 TYPE1 2213194-1

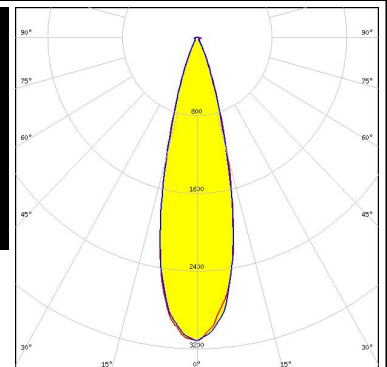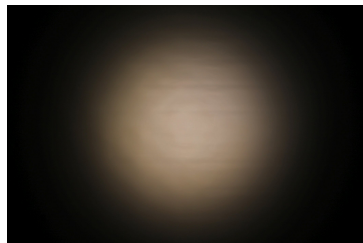

PHOTOMETRIC DATA (MEASURED):

XICATO

LED XTM - 19mm LES
FWHM / FWTM 28.0° / 52.0°
Efficiency 89 %
Peak intensity 2.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16491_XTM-ADAPTER-50-A

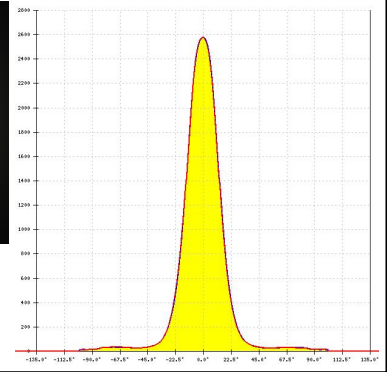


PHOTOMETRIC DATA (SIMULATED):



LED V9 HD
FWHM / FWTM 16.0° / 26.0°
Efficiency 91 %
Peak intensity 10.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:
 C13658_CLAMP-VERO13-18
 Bender Wirth: 496 Typ L1




LED VERO13
FWHM / FWTM 21.0° / 39.0°
Efficiency 90 %
Peak intensity 5.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:
 C13658_CLAMP-VERO13-18

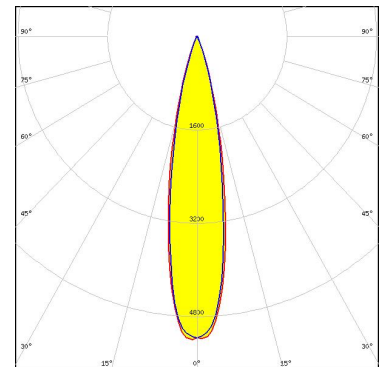


CITIZEN

LED CLL02x/CLU02x (LES10)
FWHM / FWTM 16.0° / 30.0°
Efficiency 87 %
Peak intensity 8.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:
 C13658_CLAMP-VERO13-18
 Bender Wirth: 434 Typ L1

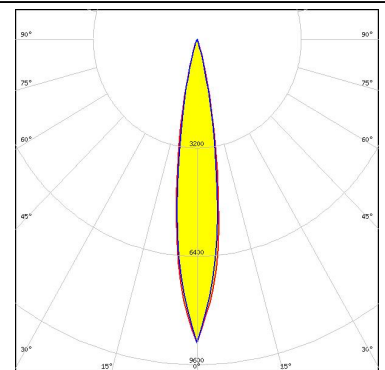

LED CXA/B 1816 & CXA/B 1820 & CXA 1850
FWHM / FWTM 19.0° / 34.0°
Efficiency 89 %
Peak intensity 6.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
 C14123_CLAMP-CXA15-18

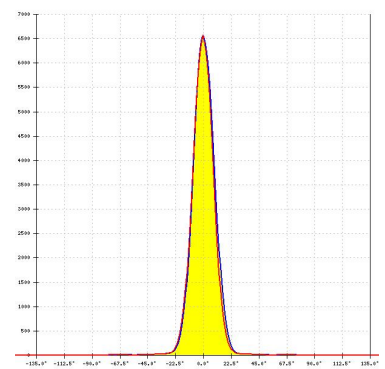

PHOTOMETRIC DATA (SIMULATED):

CREE LED		
LED	CXA/B 25xx	
FWHM / FWTM	25.0° / 47.0°	
Efficiency	85 %	
Peak intensity	3.5 cd/lm	
LEDs/each optic	1	
Light colour	White	
Required components: C14036_CLAMP_CXA25-30		
LUMILEDS		
LED	LUXEON CoB 1205HD	
FWHM / FWTM	19.0° / 33.0°	
Efficiency	86 %	
Peak intensity	6.8 cd/lm	
LEDs/each optic	1	
Light colour	White	
Required components: C13658_CLAMP-VERO13-18 Bender Wirth: 480 Typ L1		
LUMINUS		
LED	CTM-18 (Tunable White)	
FWHM / FWTM	23.0° / 47.0°	
Efficiency	78 %	
Peak intensity	3.1 cd/lm	
LEDs/each optic	1	
Light colour	White	
Required components: C13658_CLAMP-VERO13-18		

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)