

WJ10050-300

UNCONTROLLED DOCUMENT

PHYSICAL DIMENSIONS:



- A 100.0[3.937] \pm 1.00[.039]
- B 50.0[1.969] \pm 1.00[.039]
- C 0.085[.0033] \pm 0.02[.0008]




ELECTRICAL CHARACTERISTICS:

Initial Permeability(u') (1MHz)	850 \pm 20%
------------------------------------	---------------

PRODUCTS SHAPE AND DIMENSIONS

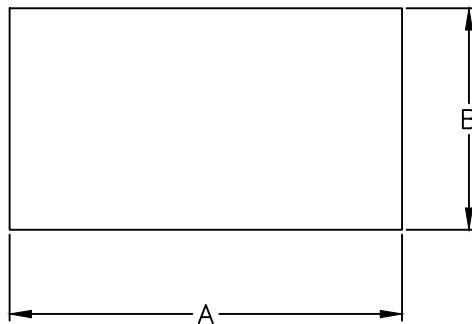

Complex permeability vs. Frequency

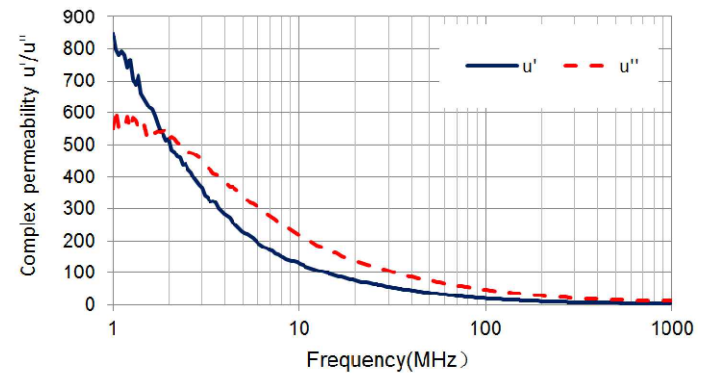

MEASURED BY ANGILENT E4991A , 1Ts .
ALLOY THICKNESS ONLY

NOTES: UNLESS OTHERWISE SPECIFIED

1. OPERATING TEMPERATURE RANGE -40°C TO 85°C .
2. METAL ALLOY SHEET .
3. C IS MEASURED AFTER REMOVING PAPER LINER OF ADHESIVE

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
				Laird			
				PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
				WJ10050-300		A	CO-FIRE QIU
				DATE:	SCALE:	SHEET:	
				09/23/15	NTS	1 of 1	
A	ORIGINAL DRAFT	09/23/15	QIU	CAD #	TOOL #		
REV	DESCRIPTION	DATE	INT	WJ10050-300-A			