




## Screw Terminal Blocks

### 500/12 35 DS

terminal block, 12 pole, insulating material: PA 6, cross-section rating: 2.5 mm<sup>2</sup>, pin spacing: 10.00 mm, mounting hole diameter: 3.5 mm, wire protector (DS): yes, fixing: screw, voltage rating: 450 V, current rating: 24.0 A

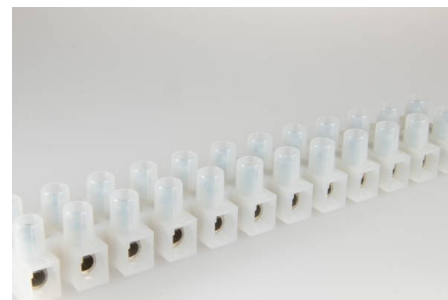

## Order Info

|                             |               |
|-----------------------------|---------------|
| reference number (ref. no.) | 123312        |
| PU                          | 50            |
| EAN                         | 4028012100866 |

## Type

|                         |                     |
|-------------------------|---------------------|
| type                    | terminal block      |
| number of poles         | 12 pole             |
| clamping units per pole | 1                   |
| colour                  | natural             |
| cross-section rating    | 2.5 mm <sup>2</sup> |
| connection type         | screw               |
| wire protector (DS)     | yes                 |

## Technical Data

|                                    |                     |
|------------------------------------|---------------------|
| voltage rating                     | 450 V               |
| current rating                     | 24.0 A              |
| insulating material                | PA 6                |
| contact material                   | brass               |
| core cross-section min.            | 0.5 mm <sup>2</sup> |
| core cross-section max.            | 2.5 mm <sup>2</sup> |
| flammability rating                | V-2                 |
| min. Umgebungstemperatur           | -40 °C              |
| max. Ambient Temperature Operation | 85 °C               |
| type of conductor solid            | yes                 |
| type of conductor flexible         | yes                 |
| type of conductor stranded         | yes                 |
| stripping length                   | 7.0-7.5 mm          |
| mounting hole diameter             | 3.5 mm              |
| pin spacing                        | 10.00 mm            |
| fixing                             | screw               |

## Approvals

|                         |                              |
|-------------------------|------------------------------|
| <b>acc. to EN 60998</b> | <a href="#">Download PDF</a> |
| <b>acc. to UL</b>       | <a href="#">Download PDF</a> |
| <b>acc. to CSA</b>      | <a href="#">Download PDF</a> |

## Accessories

|                   |        |
|-------------------|--------|
| <b>500 BZ/12</b>  | 191312 |
| <b>ABK 405/12</b> | 193212 |
| <b>ZEL 110</b>    | 196420 |