




## Screw Terminal Blocks

### 1000/12 DS

terminal block, 12 pole, insulating material: PA 6, cross-section rating: 6.0 mm<sup>2</sup>, pin spacing: 12.00 mm, mounting hole diameter: 3.6 mm, wire protector (DS): yes, fixing: screw, voltage rating: 500 V, current rating: 41.0 A

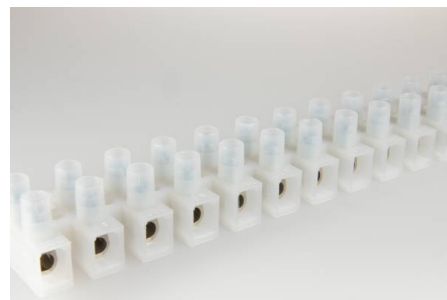

### Order Info

|                             |               |
|-----------------------------|---------------|
| reference number (ref. no.) | 125312        |
| PU                          | 25            |
| EAN                         | 4028012100309 |

### Type

|                         |                     |
|-------------------------|---------------------|
| type                    | terminal block      |
| number of poles         | 12 pole             |
| clamping units per pole | 1                   |
| colour                  | natural             |
| cross-section rating    | 6.0 mm <sup>2</sup> |
| connection type         | screw               |
| wire protector (DS)     | yes                 |

### Technical Data

|                                    |                     |
|------------------------------------|---------------------|
| voltage rating                     | 500 V               |
| current rating                     | 41.0 A              |
| insulating material                | PA 6                |
| contact material                   | brass               |
| core cross-section min.            | 0.5 mm <sup>2</sup> |
| core cross-section max.            | 6.0 mm <sup>2</sup> |
| flammability rating                | V-2                 |
| min. Umgebungstemperatur           | -40 °C              |
| max. Ambient Temperature Operation | 85 °C               |
| type of conductor solid            | yes                 |
| type of conductor flexible         | yes                 |
| type of conductor stranded         | yes                 |
| stripping length                   | 7.5-8.0 mm          |
| mounting hole diameter             | 3.6 mm              |
| pin spacing                        | 12.00 mm            |
| fixing                             | screw               |

## Approvals

|                         |                              |
|-------------------------|------------------------------|
| <b>acc. to EN 60998</b> | <a href="#">Download PDF</a> |
| <b>acc. to UL</b>       | <a href="#">Download PDF</a> |
| <b>acc. to CSA</b>      | <a href="#">Download PDF</a> |

## Accessories

|                   |        |
|-------------------|--------|
| <b>1000 BZ/12</b> | 191412 |
| <b>ABK 406/12</b> | 193312 |
| <b>ZEL 110</b>    | 196420 |