TAOGLAS



Datasheet

Part No:
WDMP.2458.A

Description:

5dBi Embedded Dual-Band Wi-Fi Circular Polarized 50*50mm Patch Antenna

SMA(F) Straight Connector

Features:

High efficiency Wi-Fi Patch Antenna including Wi-Fi 6 bands

Covers Wi-Fi at bands 2.4GHz/5.8/7.1GHz

Right Hand Circularly Polarized (RHCP)

Military grade dielectrics & low loss substrates

High Gain, greater than 5dBi

Dimensions (with connector): 50 x 50 x 16.57 mm

Dimensions (without connector): 50 x 50 x 7.07 mm

Screw mount with SMA(F) Straight connector

RoHS & Reach Compliant

1.	Introduction	3
2.	Specifications	5
3.	Antenna Characteristics	6
4.	Radiation Patterns	9
5.	Mechanical Drawing	11
6.	Installation Instructions	12
7.	Packaging	14
	Changelog	15

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

1. Introduction





The WDMP.2458.A antenna with SMA(F) connector is a circularly polarized Wi-Fi antenna also covering the 7.1GHz Wi-Fi 6 band which consists of an advanced composite dielectric structure, providing better performance at greater distance and a broader band frequency range in the smallest package in the market.

Using military grade substrates, the WDMP.2458.A is aimed at unmanned systems, such as unmanned aerial/ground vehicles (UAVs/UGVs), robotics, and ground controllers/stations, applicable in different sectors from civilian, law enforcement, to defence.

Taking advantage of substrates of low dielectric constant and low dissipation factor, the WDMP.2458.A uses glass microfiber reinforced PTFE substrates to minimize signal transmission loss in order to achieve high efficiency. It performs with high gain of at least over 5dBi at Wi-Fi bands from 2400~2500MHz, 5150~5850MHz and 5925~7125MHz. Using circular polarized signals means the link is more stable for devices where the direction of orientation is unknown or where multipath is an issue.

The WDMP.2458.A's low profile design, equipped with a SMA(F) connector, is easy to install inside a housing or directly onto a PCB mainboard. It has four thru-holes at the patch corners, allowing users to fix the antenna with screws. The antenna has passed ISO 16750 high/low-temperature test and random vibration reliability testing.

Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free space can degrade by at least 1 or 2dBi when put inside a device. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect, giving you better performance.

Upon testing of any of our antennas with your device and a selection of appropriate layout, integration technique, or cable, Taoglas can make sure any of our antennas' peak gain will be below the peak gain limits. Taoglas can then issue a specification and/or report for the selected antenna in your device that will clearly show it complying with the peak gain limits, so you can be assured you are meeting regulatory requirements for that module.

For example, a module manufacturer may state that the antenna must have less than 2dBi peak gain, but you don't need to select an embedded antenna that has a peak gain of less than 2dBi in free space. This will give you a less optimized solution. In that case it will be better to go for a slightly higher free space peak gain of 3dBi or more if available. Once that antenna gets integrated into your device, performance will degrade below this 2dBi peak gain due to the effects of GND plane, surrounding components, and device housing. If you want to be absolutely sure, contact Taoglas and we will test. Choosing a Taoglas antenna with a higher peak gain than what is specified by the module manufacturer and enlisting our help will ensure you are getting the best performance possible without exceeding the peak gain limits.

The connector can be customized subject to MOQ, for more information please contact your regional Taoglas customer support team.



2. Specifications


Wi-Fi Electrical									
Band	**Frequency (MHz)**	**Efficiency (%)**	**Average Gain (dB)**	**Peak Gain (dBi)**	**Axial Ratio (dB)**	**Impedance**	**Max Power Input**	**Polarization**	**Radiation Pattern**
2.4GHz Wi-Fi	2400~2500	73	-1.3	4.9	< 2	50Ω	10W	RHCP	Omnidirectional
5.8GHz Wi-Fi	5150~5850	80	-0.9	6.3	< 8				
7.1GHz Wi-Fi 6	5925~7125	62	-1.8	5.8	< 10				

Mechanical	
Dimension (mm)	50 x 50 x 7.07 (without connector) 50 x 50 x 16.57 (with connector)
Antenna Patch Material	PTFE composites
Connector	SMA(F) Straight
Weight (g)	32.5


Environmental	
Temperature Range	-40°C to 85°C

3. Antenna Characteristics


3.1 Return Loss

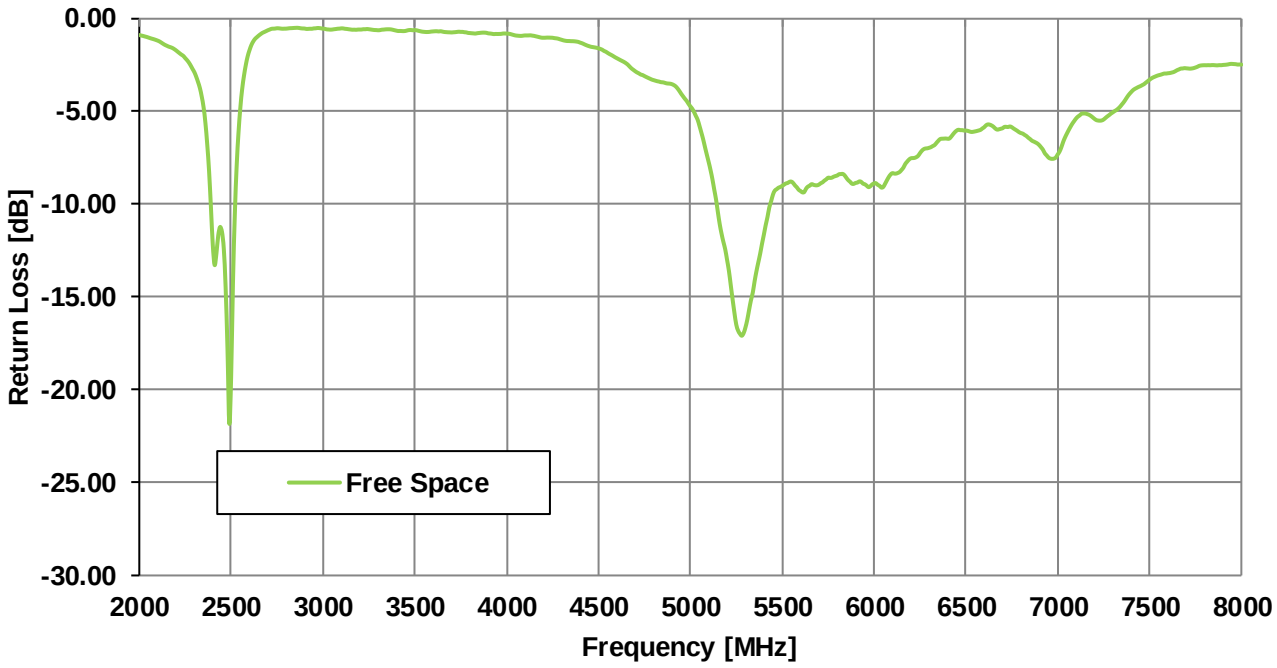


3.2 VSWR

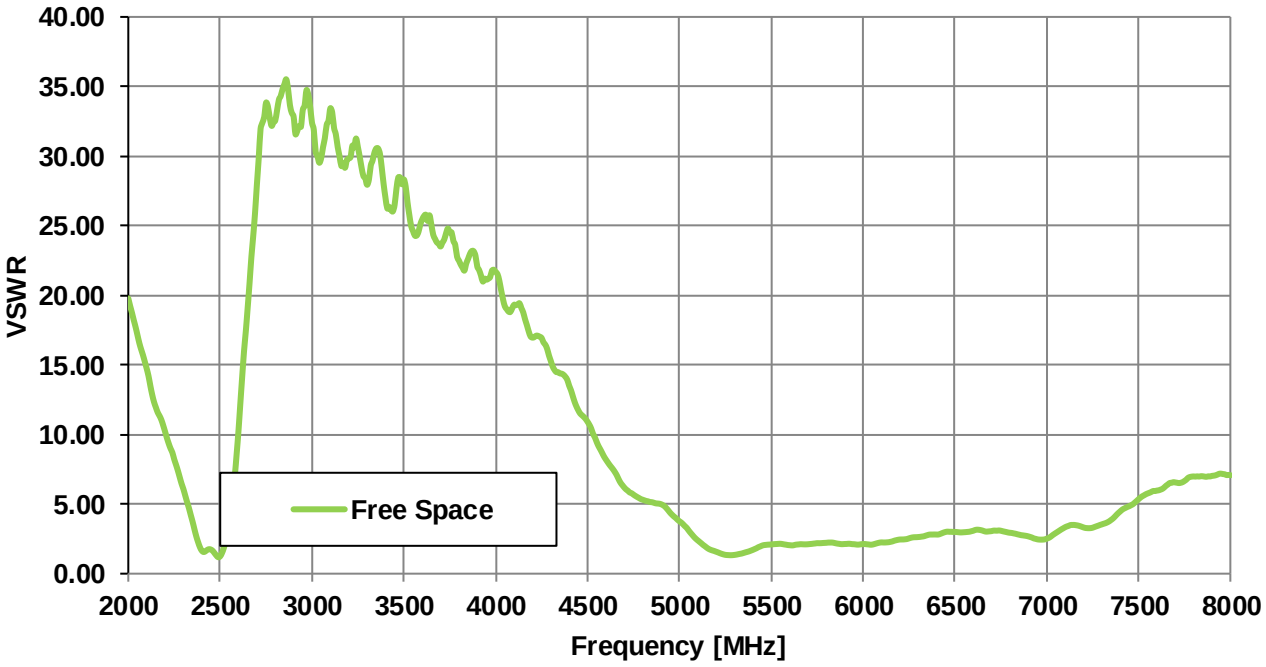


3.3 Efficiency

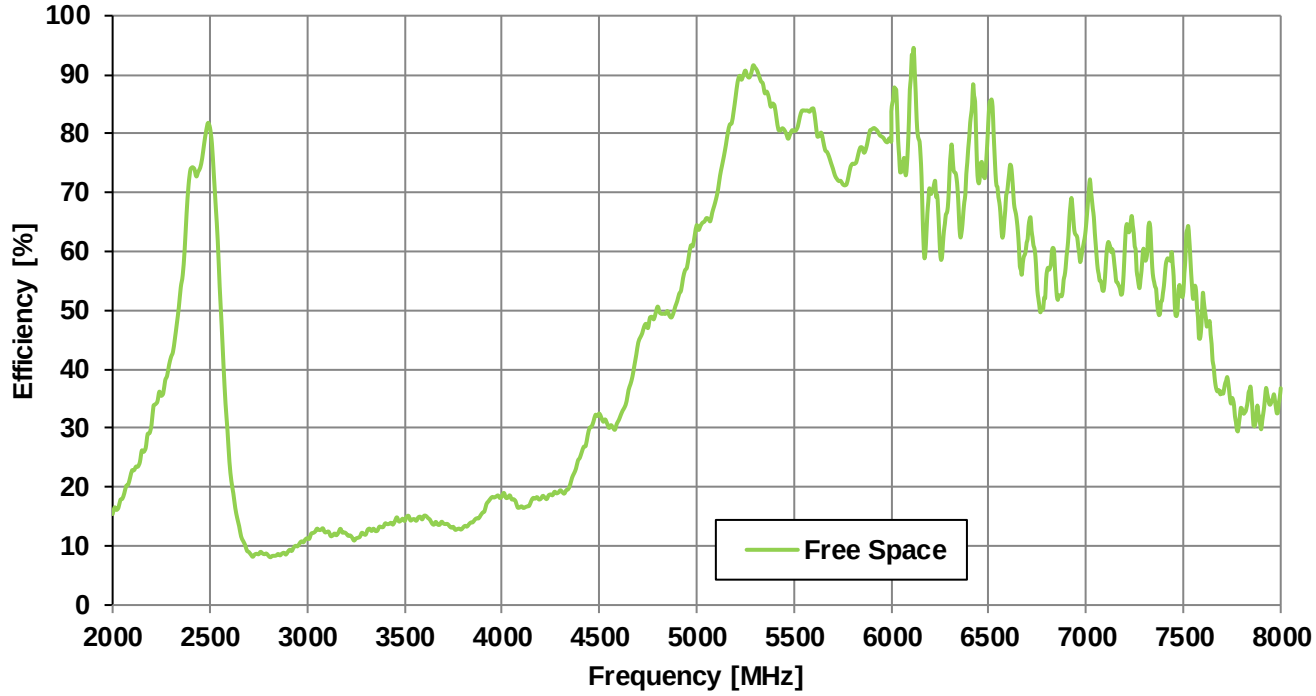


3.4 Peak Gain

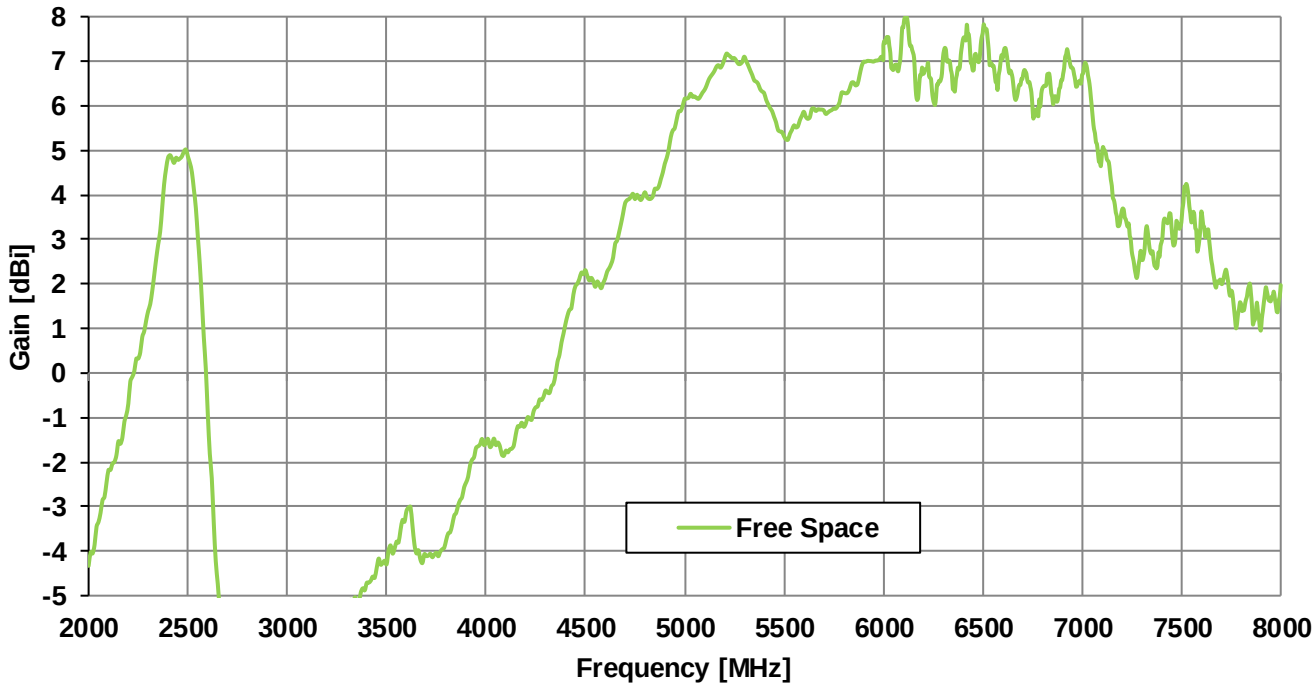

3.5 Average Gain

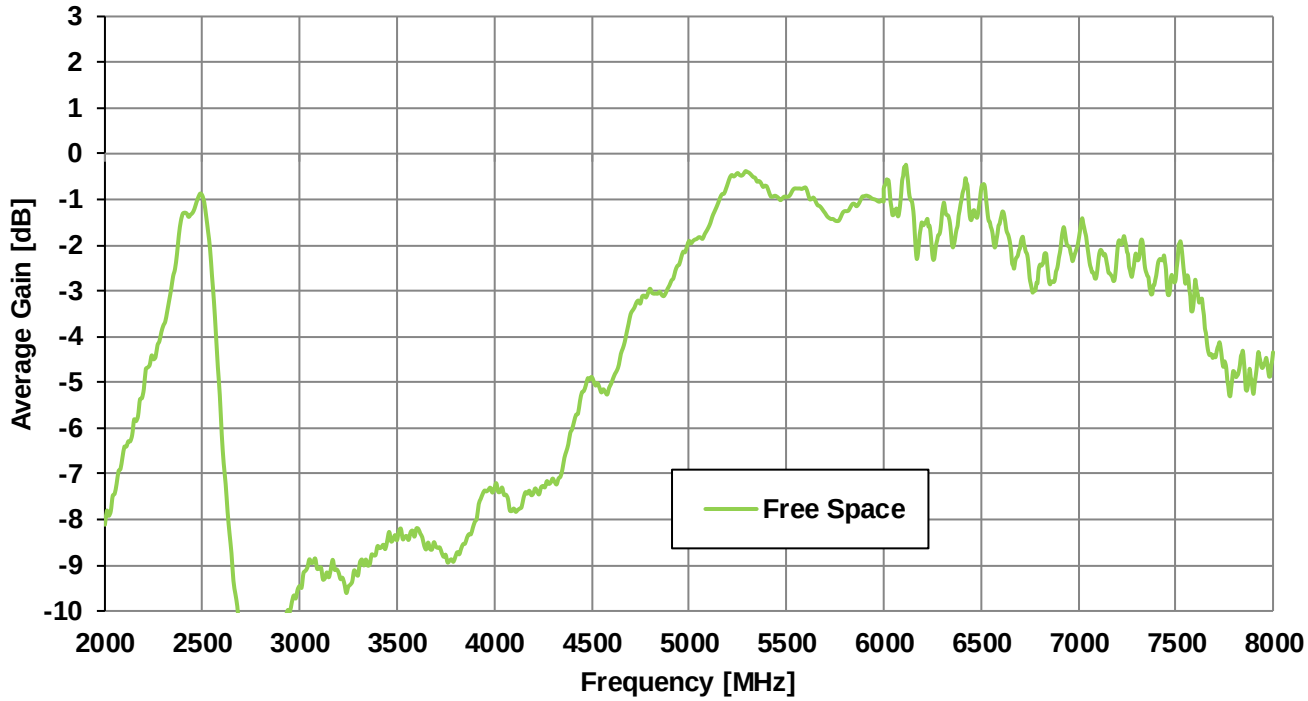


3.6 Axial Ratio

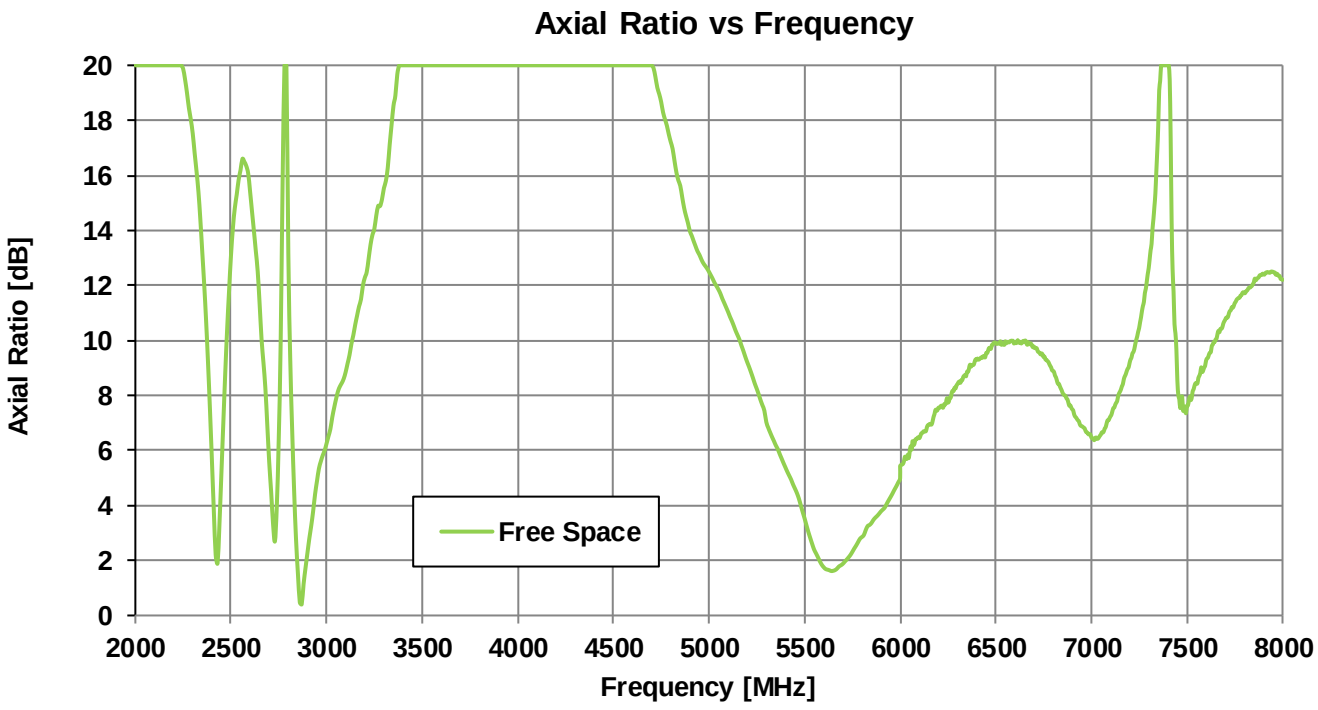

4. Radiation Patterns


4.1 Test Setup

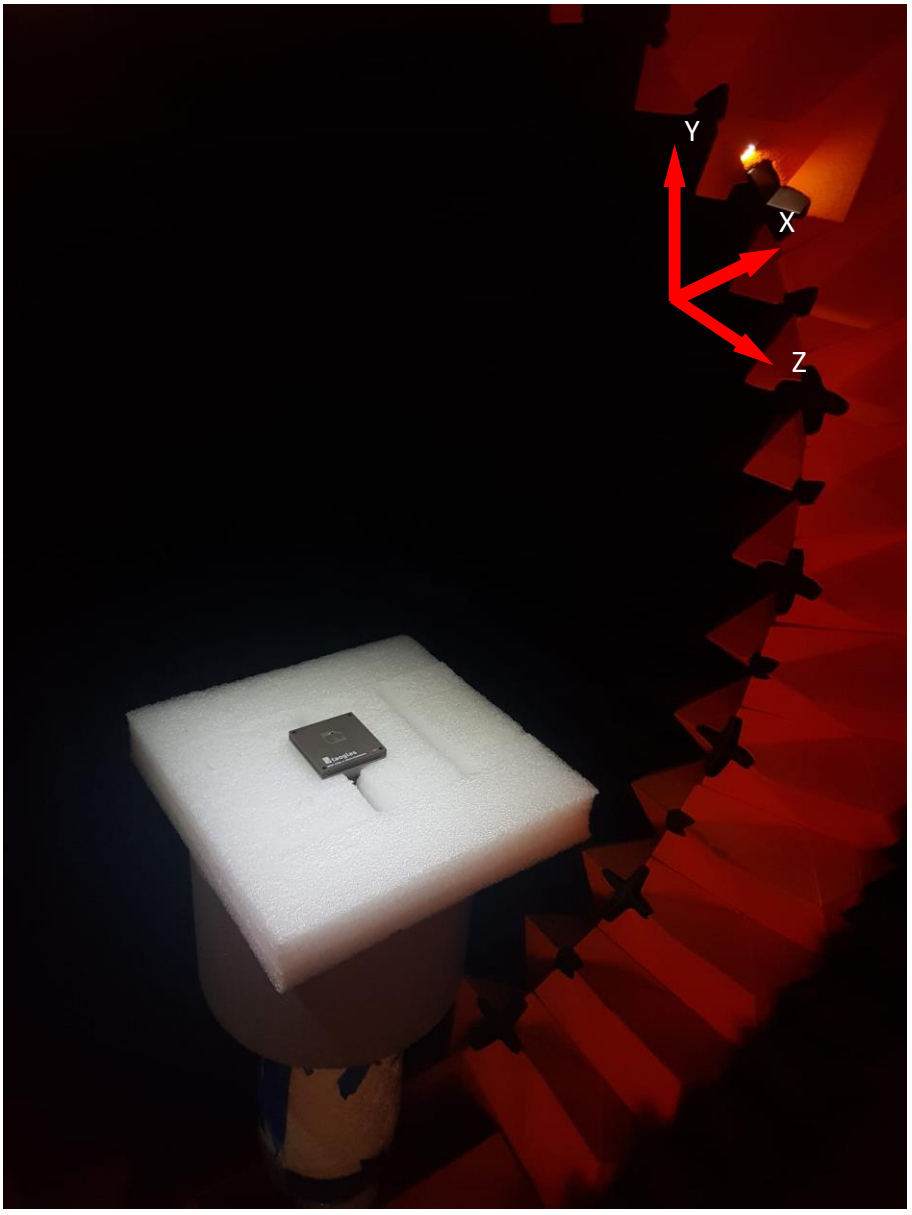


Free space

4.2 3D and 2D Radiation Patterns


2450MHz	5550MHz

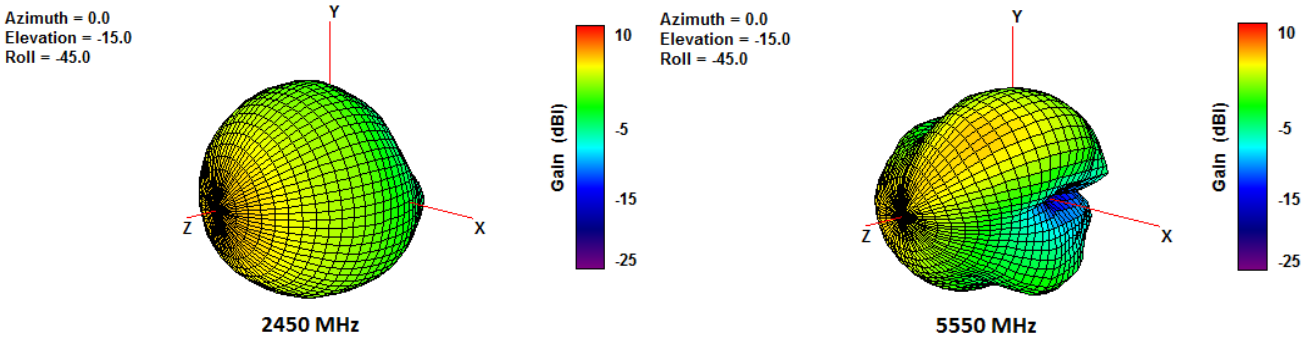

XY Plane	XZ Plane	YZ Plane

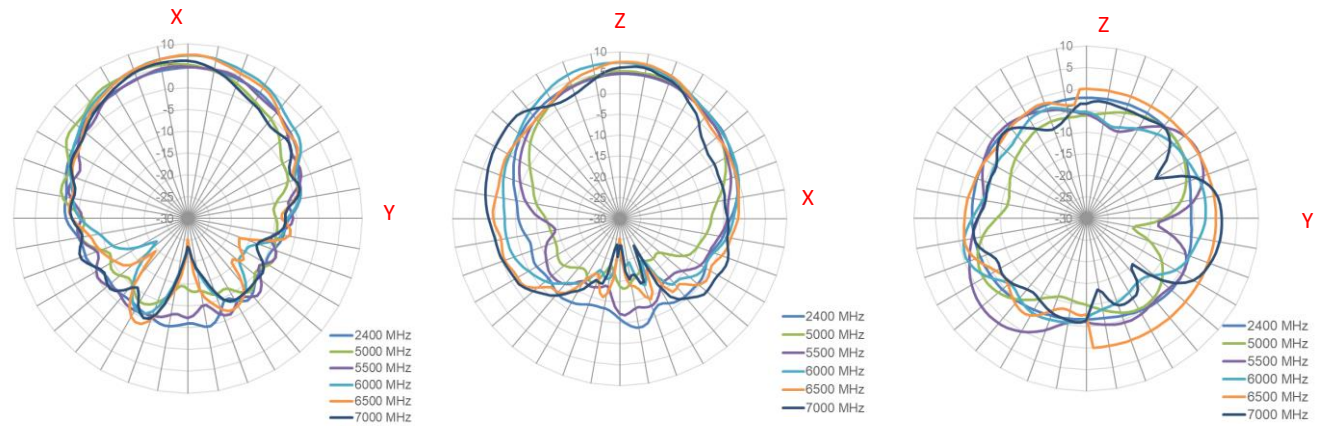


5. Mechanical Drawing (Units: mm)

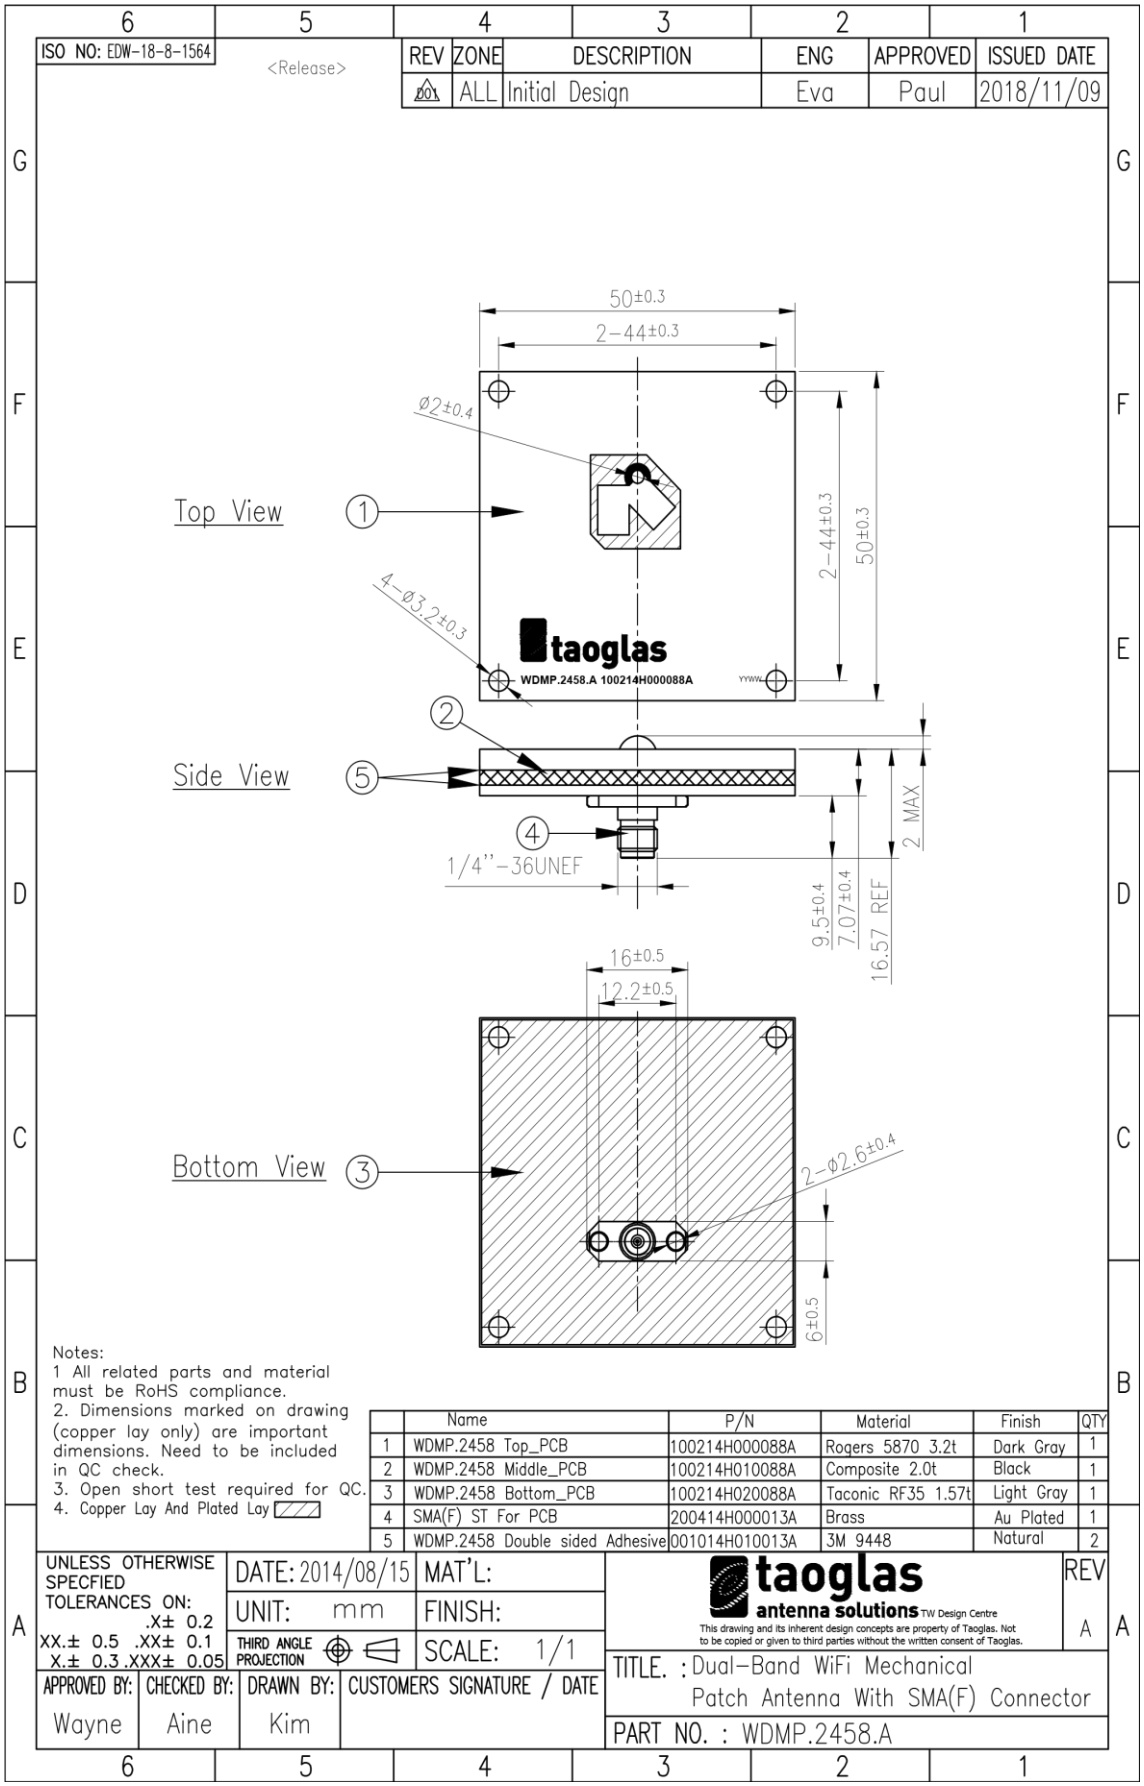


6. Installation Instructions

There might be situations where the WDMP.2458.A needs to sit firmly on the device board, either a plastic or a metal board. The patch provides four screw holes for this purpose.
This section illustrates the type of screw and screw/connector holes dimension should be co nsidered for installation.

Screw type: Non-conductive M3 screw
Nut type: Non-conductive HEX M3 nut
On-board screw holes dimension: Ø 3.2mm
On-board connector holes dimension: 18 x 8 mm

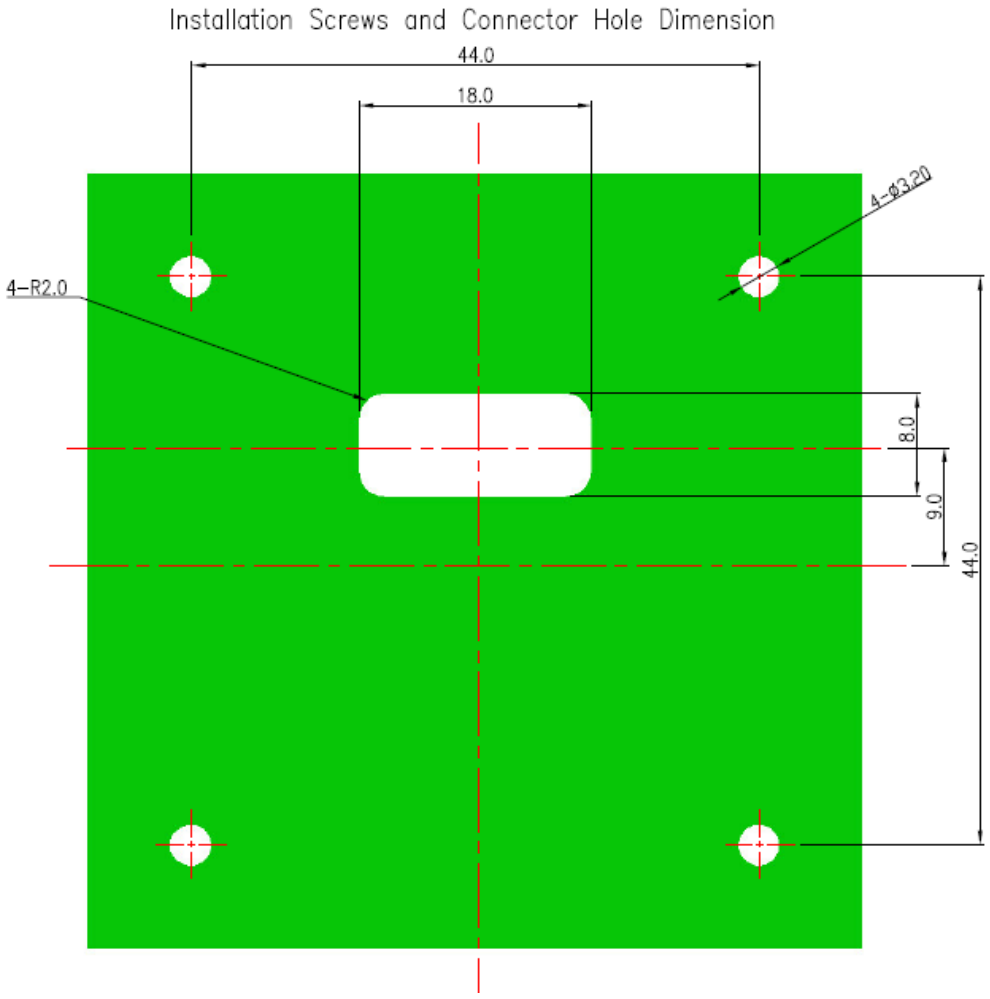


Exploded View

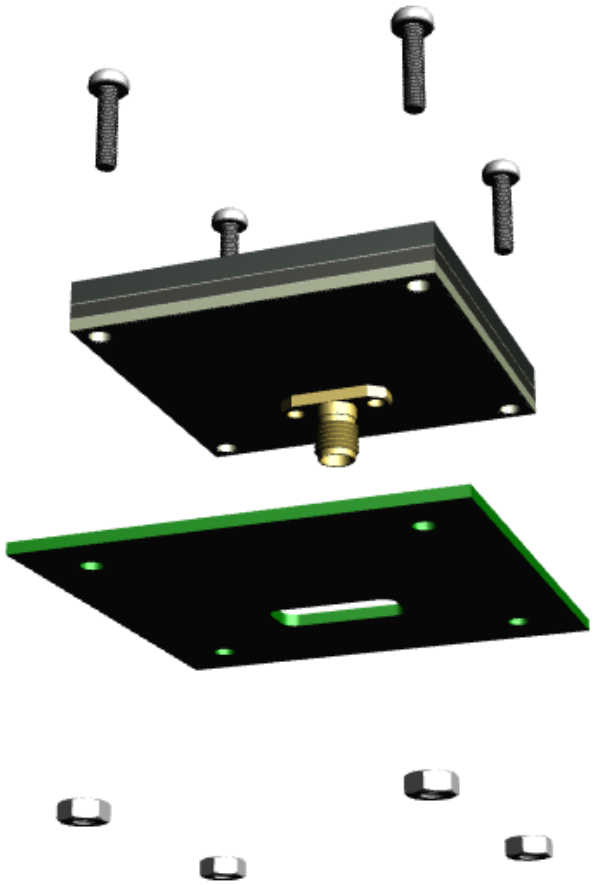

Screw Length Calculation

X = implemented board thickness


Screw Length ≧ 7.07+X+2.5(M3 Nut Thickness)

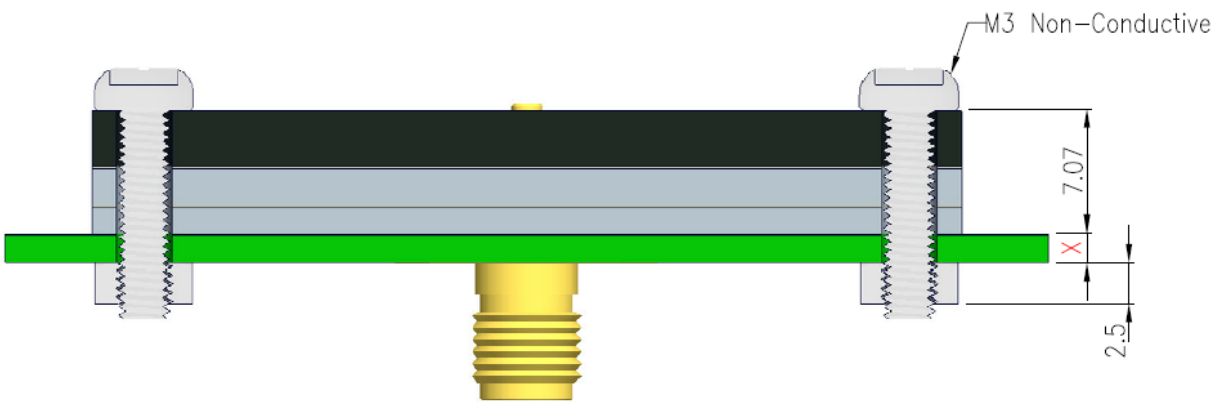


7. Packaging

WDMP.2458.A


Packaging Specifications

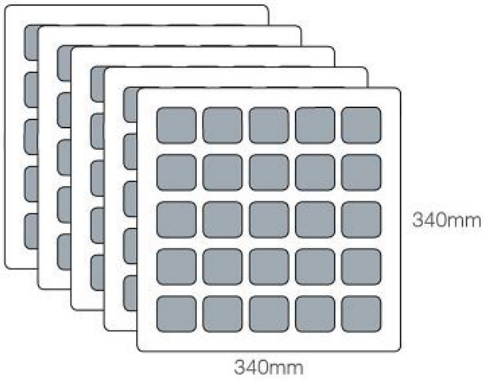

25 pcs WDMP.2458.A per tray
Each tray in vacumed PE bag
Tray Dimensions - 340*340*27mm
Weight - .91Kg per tray

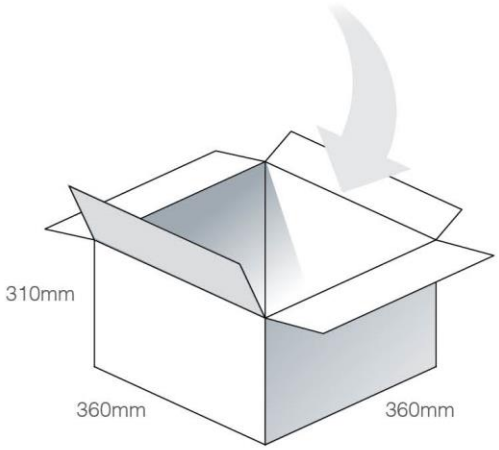

10 Trays per Carton - 250 pcs
Carton Dimensions - 360*360*310mm
Weight - 9.93Kg

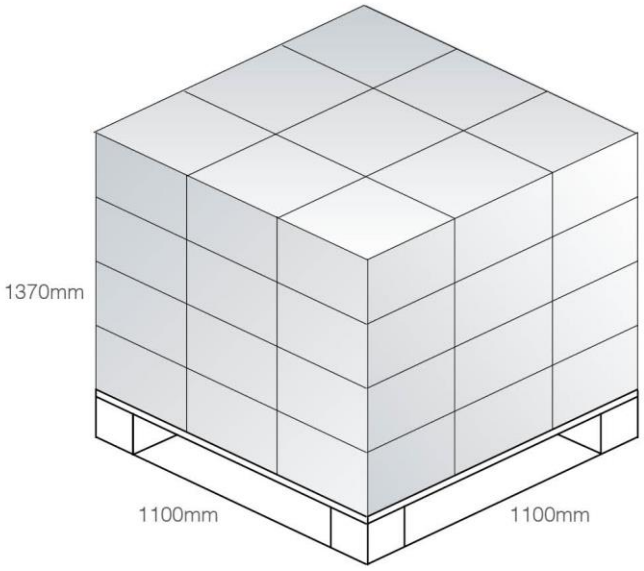

Pallet Dimensions 1100*1100*1370mm
36 Cartons per Pallet
9 Cartons per layer
4 Layers

Changelog for the datasheet

SPE-15-8-046 – WDMP.2458.A

Revision: B (Current Version)	
Date:	2020-05-25
Changes:	Updated to include W-Fi 6 data
Changes Made by:	Jack Conroy

Previous Revisions

Revision: A (Original First Release)	
Date:	2015-08-11
Notes:	
Author:	Technical Writer

TAOGLAS®

www.taoglas.com



© Taoglas