
ADELS contact

## Screw-Screwless Connectors

# 900 Q RZ/12

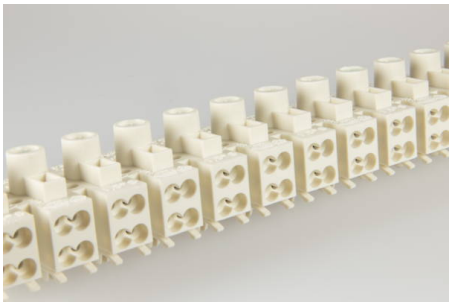

terminal block, 12 pole, fixing: catch pin, clamping units per pole: 4, voltage rating: 450 V, current rating: 17.5 A, cross-section rating external: 2.5 mm², cross-section rating internal: 1.5 mm²

## Order Info

| | |
|---|---|
| **reference number (ref. no.)** | 114212 |
| **PU** | 25 |
| **EAN** | 4028012104505 |

## Type

| | |
|---|---|
| **type** | terminal block |
| **number of poles** | 12 pole |
| **clamping units per pole** | 4 |
| **colour** | white |
| **cross-section rating** | 1.5 / 2.5 mm² |

## Technical Data

| | |
|---|---|
| **voltage rating** | 450 V |
| **current rating** | 17.5 A |
| **insulating material** | PA 6.6 |
| **contact material** | brass |
| **flammability rating** | V-2 |
| **max. Ambient Temperature Operation** | 85 °C |
| **wall thickness min.** | 0.5 mm |
| **wall thickness max.** | 1.4 mm |
| **internal core cross-section max.** | 1.5 mm² |
| **internal stripping length** | 7.0-7.5 mm |
| **external stripping length** | 8.0-8.5 mm |
| **fixing** | catch pin |
| **internal core cross-section min.** | 0.5 mm² |
| **Type of Conductor Solid External** | yes |
| **Type of Conductor Flexible External** | yes |
| **Type of Conductor Solid Internal** | yes |
| **Type of Conductor Stranded Internal** | yes |
| **cross-section rating external** | 2.5 mm² |
| **cross-section rating internal** | 1.5 mm² |

## Approvals

| | |
|---|---|
| **acc. to EN 60998** | Download PDF |
| **acc. to UL** | Download PDF |
| **acc. to CSA** | Download PDF |

## Accessories

| | |
|---|---|
| **ZEL 110** | 196420 |