


Specification Sheet

Part Number: 596-00862

Placards made with UV stable inks and materials tested to last up to 25 years, even in direct sun exposure.
Aggressive adhesive ensures strong bond, even on powder coated surfaces.
Meets or exceeds NEC & IFC standards for printed text, character height, color and outdoor UV stability.

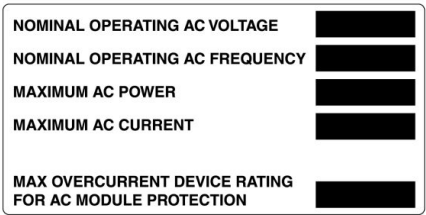

Optional Paint Shields provide additional protection for pre-printed and variable data placards.

Metal Solar Placard, Engravable, AC Module, 4.0" x 2.0", AA, Black, 5/pkg

Article Number	596-00862
Type	AC2011M5ENG
Color	Black (BK)
Quantity Per	pack
Product Description	Variable data placards are used to mark areas specific to the individual installation, like voltage data. Made of the same durable material as pre-printed metal solar placards, engravable placards are designed to meet industry codes. Engravable placards have a black area that can be engraved using standard engraving equipment.

Short Description	Metal Solar Placard, Engravable, AC Module, 4.0" x 2.0", AA, Black, 5/pkg
Global Part Name	AC2011M5ENG-AA-BK
Technical Description	4" X 2" Black text on aluminum background that reads as: "NOMINAL AC VOLTAGE;NOMINAL OPERATING AC FREQUENCY;MAXIMUM AC POWER;MAXIMUM AC CURRENT;MAXIMUM OVERCURRENT DEVICE RATING FOR AC MODULE PROTECTION." 10 per pack. Nameplate can be used with standard engraving equipment to add variable data.
Length L (Imperial)	4.0
Length L (Metric)	101.6
Width W (Imperial)	4.0
Width W (Metric)	101.6
Height H (Imperial)	2.0
Height H (Metric)	50.80
Material	Anodized Aluminum (AA)
Material Shortcut	AA
Adhesive	Ultra High Bond Permanent Acrylic Adhesive

Halogen Free	No
Adhesive Operating Temperature	from +50°F (from +10°C)
Operating Temperature	-40°F to +203°F (-40°C to +95°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	NEC2014 NEC2017
Warranty (US)	Yes
Package Quantity (Imperial)	5
Package Quantity (Metric)	5
Customs Number	7616995195
Labels per Column	1
Labels per Row	1