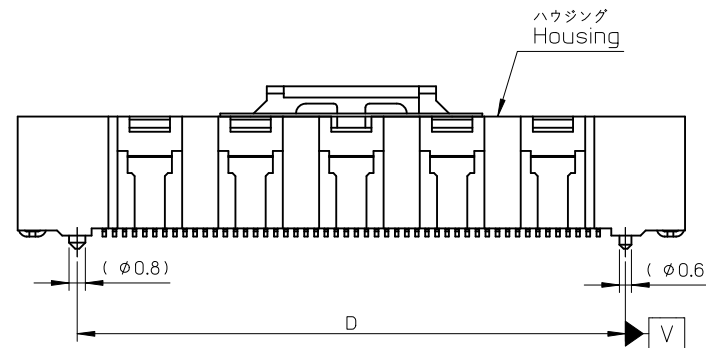
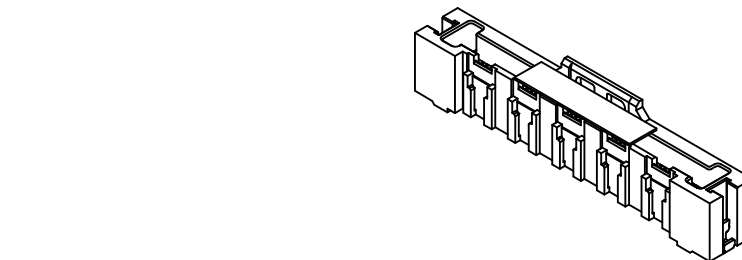
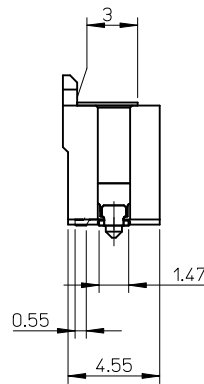
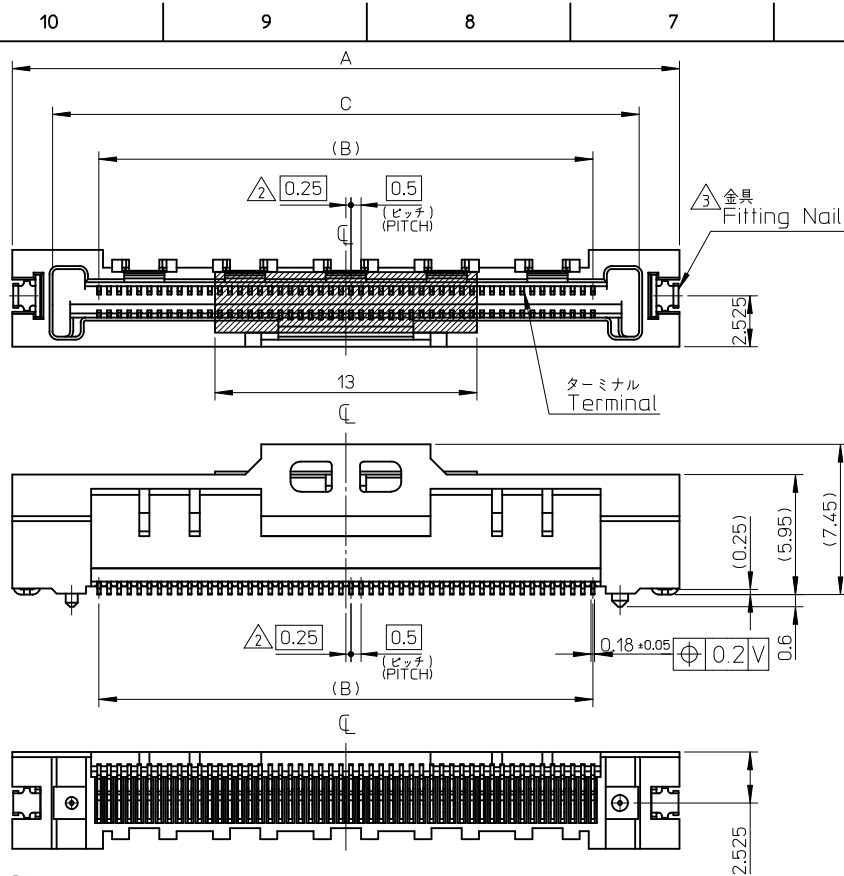



参考基板レイアウト
P.C BOARD PATTERN
DIMENSION(REF.)
(マウント面)
(MOUNTING SIDE)

注 記 NOTE

1. 使用材料
MATERIAL
ハウジング
HOUSING : 液晶ポリマー (LCP), ガラス充填,
UL94V-0 色: 黒色
LIQUID CRYSTAL POLYMER(LCP),
GLASS FILLED,UL94V-0 COLOR:BLACK
ターミナル
TERMINAL : 銅合金(τ=0.18)
ニッケル下地 金メッキ (コンタクト、テール部)
COPPER ALLOY(τ=0.18)
GOLD PLATING(CONTACT, TAIL AREA) OVER NICKEL PLATING.
金具
FITTING NAIL : 銅合金(τ=0.25)
ニッケル下地 錫メッキ
COPPER ALLOY(τ=0.25)
TIN OVER NICKEL PLATING.

- △ N=偶数に適用 (N: 極数)
APPLY FOR N-EVEN IN CIRCUIT)
△ パターン剥離止め用金具
FITTING NAIL FOR PREVENTION OF PEELING
OF P.C.B. PATTERN.
△ 適合ジャケット: 501783-**09
製品詳細寸法はSD-501783-001を参照下さい。
APPLICABLE JACKET:501783-**09
RE DETAILED DIMENSION,SEE "SD-501783-001."
△ 適合ジャケットカバー: 501784-**09
製品詳細寸法はSD-501784-001を参照下さい。
APPLICABLE JACKET:501784-**09
RE DETAILED DIMENSION,SEE "SD-501784-001."
6. ELV及びRoHS適合品
ELV AND RoHS COMPLIANT

REVISED	EC NO: J2010-1937	2010/03/25	DRWN:YMORI	2010/03/25	CHKD:MATSUURA	2010/03/25	APPR:KMORI KAWA	2010/05/10	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE —//—	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
										10 UNDER	± 0.2	DRAWN BY H. IJIMA	DATE 06/01/13	TITLE 0.5 FFC TO BOARD CONN REC HSG ASSY(ST)			
										10 OVER 30 UNDER	± 0.25	CHECKED BY K. TAKAHASHI	DATE 06/01/13				
										30 OVER	± 0.3	APPROVED BY H. HIRATA	DATE 06/01/13				
										ANGULAR ±1 °		MATERIAL NO. 501786-**11		DOCUMENT NO. SD-501786-001		SHEET NO. 1 OF 2	
										DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

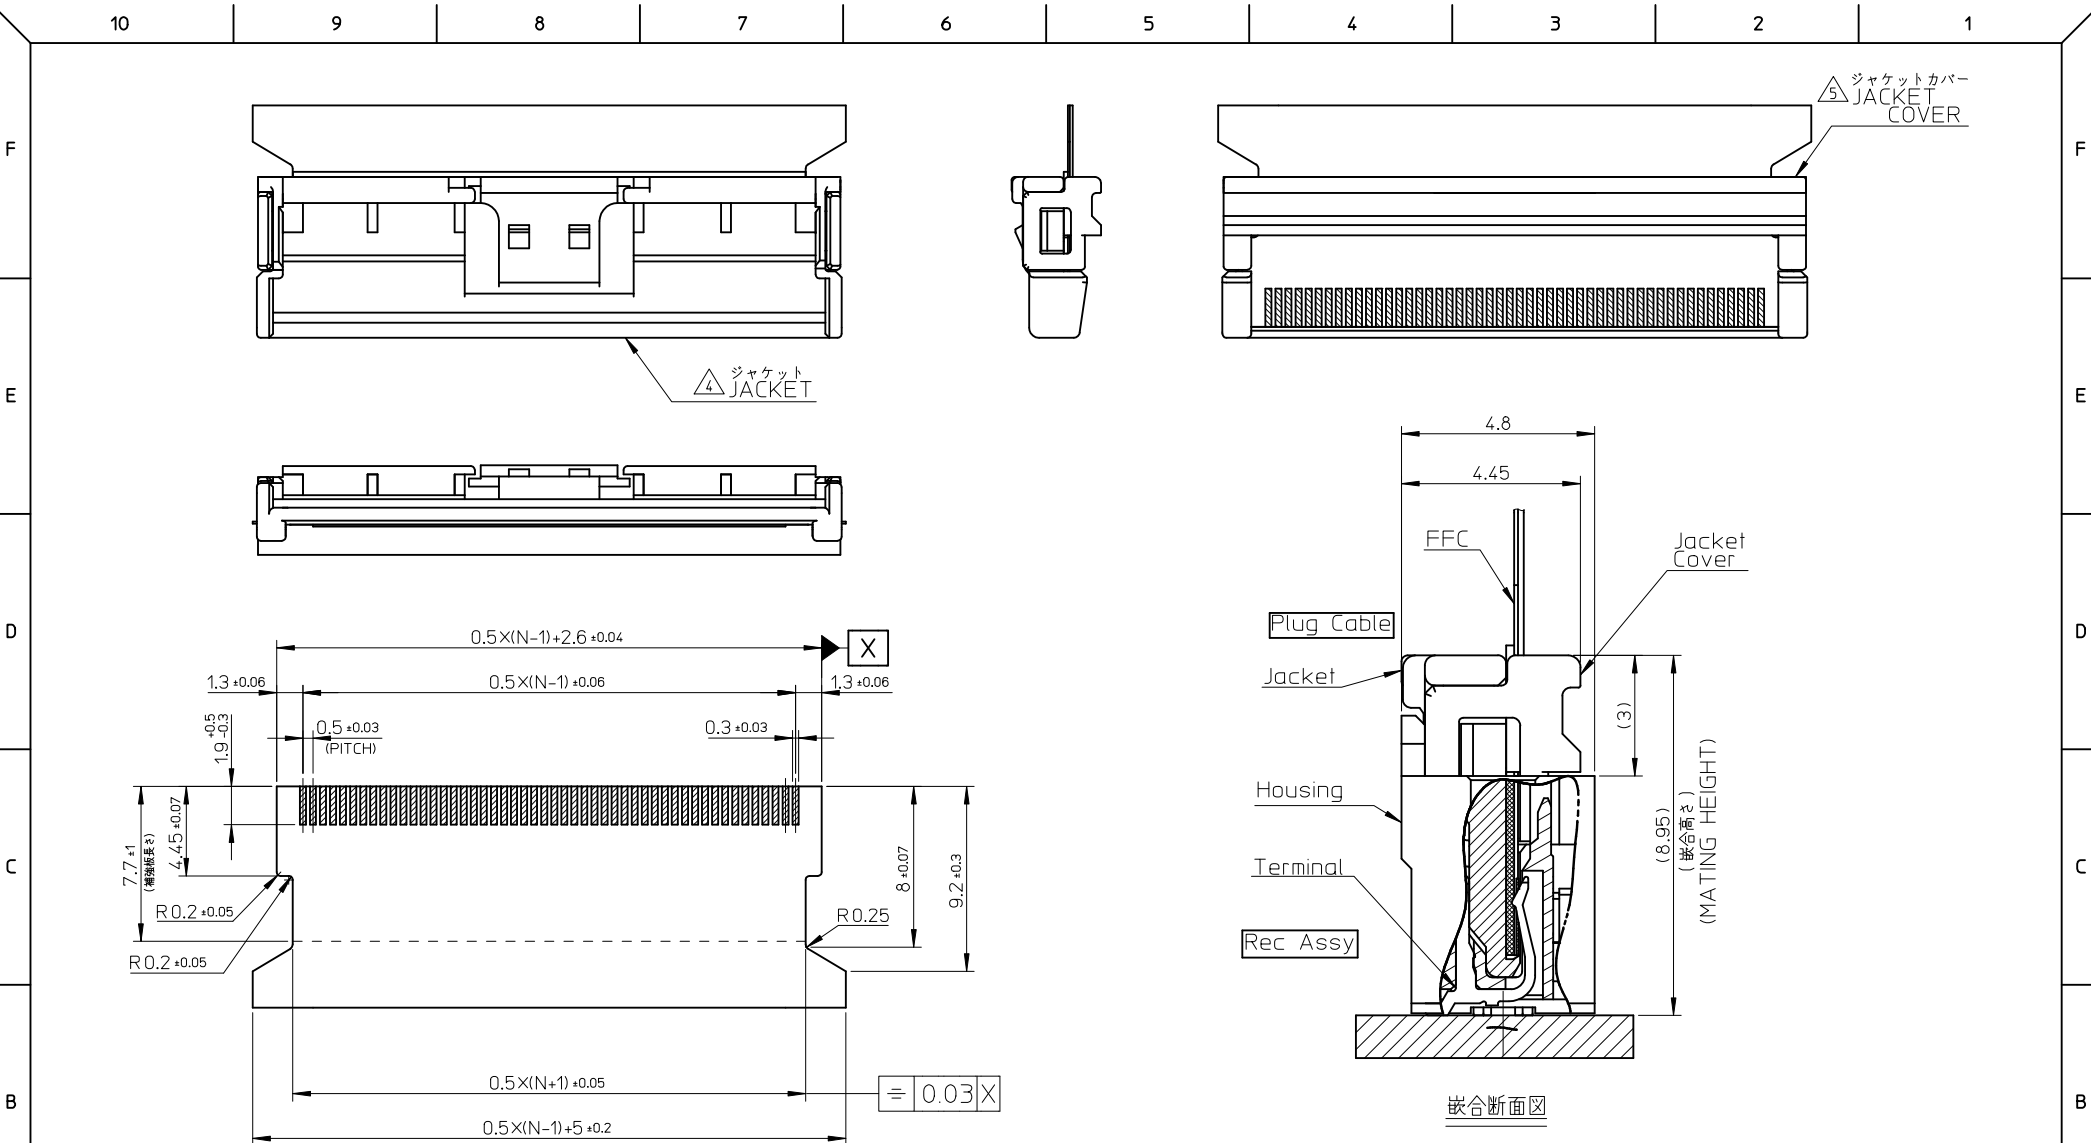

コネクタ接点部		適合FFC推奨寸法 APPLICABLE FFC RECOMMENDED DIMENSION (仕上がり厚さ: コネクタ接点部 0.3±0.03)		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
SEE SHEET 1 OF 2		2010/03/25		10 UNDER		DRAWN BY		DATE		TITLE		0.5 FFC TO BOARD CONN REC HSG ASSY(ST)	
EC NO: J2010-1937		2010/03/25		10 OVER 30 UNDER		H. IJIMA		06/01/13		CHECKED BY		DATE	
DRWN: YMORI		2010/03/25		30 OVER		K. TAKAHASHI		06/01/13		APPROVED BY		DATE	
CHKD: MATSUURA		2010/05/10		ANGULAR		H. HIRATA		06/01/13		MATERIAL NO.		DOCUMENT NO.	
APPR: KMORI KAWA		2010/05/10		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		501786-**11		SD-501786-001		MOLEX INCORPORATED		SHEET NO.	
A		REV		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		2 OF 2					

NOTES

1. 梱包数量： 900 個 / リール
NUMBER OF CONNECTORS:900 PCS/REEL

2. リードテープ長さ
LEAD TAPE LENGTH

トップテープ接着部
TOP TAPE BONDED PART
(空エンボス)
(EMPTY)

引き出し方向
PULL OUT DIRECTION

100MIN.

部品挿入部
COMPONENT
SUPPLIER

末端部
(空エンボス)
TAIL PART
(EMPTY)
160MIN.

400MIN.

3. カバーテープの剥離強度については、IEC60286-3に準拠。
COVER TAPE PEEL FORCE IS DEFINED BY IEC 60286-3.

4. 製品詳細寸法については図面 SD-501786-001を参照下さい。
DETAILED DIMENSION, SEE SD-501786-001.

5. 材料 MATERIAL
キャリアテープ：ポリスチレン
トップテープ：ポリエチレンテレフタレート、ポリエチレン
リール：ポリスチレン
CARRIER TAPE : POLYSTYRENE
TOP TAPE : POLYETHYLENE TEREPHTHALATE, POLYETHYLENE
REEL : POLYSTYRENE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex	
mm		NTS							
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 655539 DRWN: TNAKAGAWA012021/03/11 CHK'D: HSHIMOYAMA2021/03/15 APPR: SHOSHIKAWA2021/03/15 INITIAL REVISION: DRWN: HIJIMA2006/03/31 APPR: KTAHASHI2006/04/04					
ANGULAR TOL ± 3.0 °									
4 PLACES		± 0.2							
3 PLACES		± 0.25							
2 PLACES		± 0.3							
1 PLACE		± 0.1							
0 PLACES		±							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES	
						A3-SIZE		501786	


DOCUMENT STATUS	P1	RELEASE DATE	2021/03/15	13:19:25
-----------------	----	--------------	------------	----------

987654321


F
E
D
C
B
A

987654321


F
E
D
C
B
A

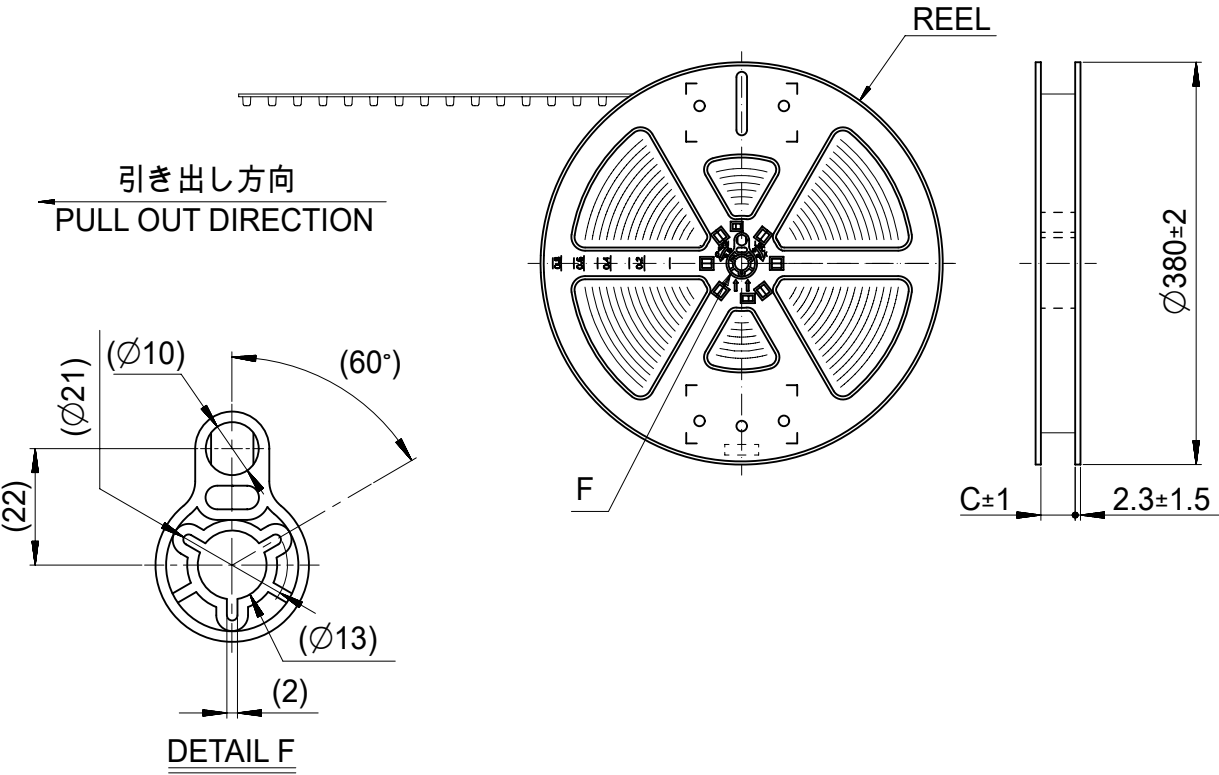

日本生産品に適用
This reel is applied for Japan production.

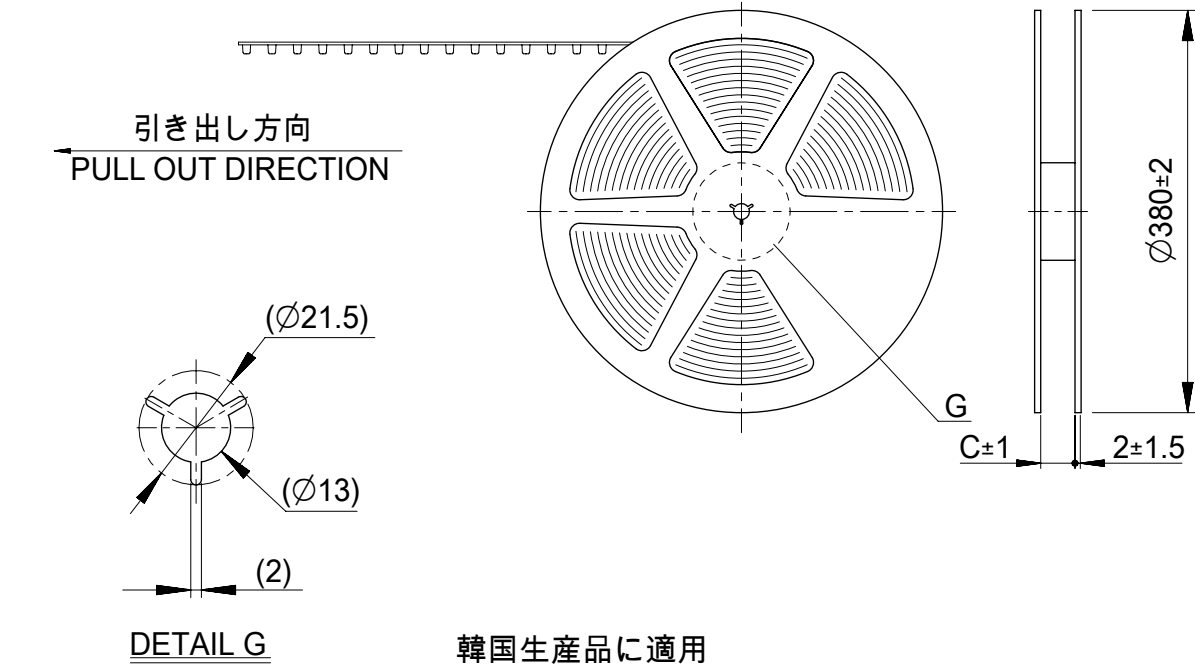

韓国生産品に適用
This reel is applied for Korea production.

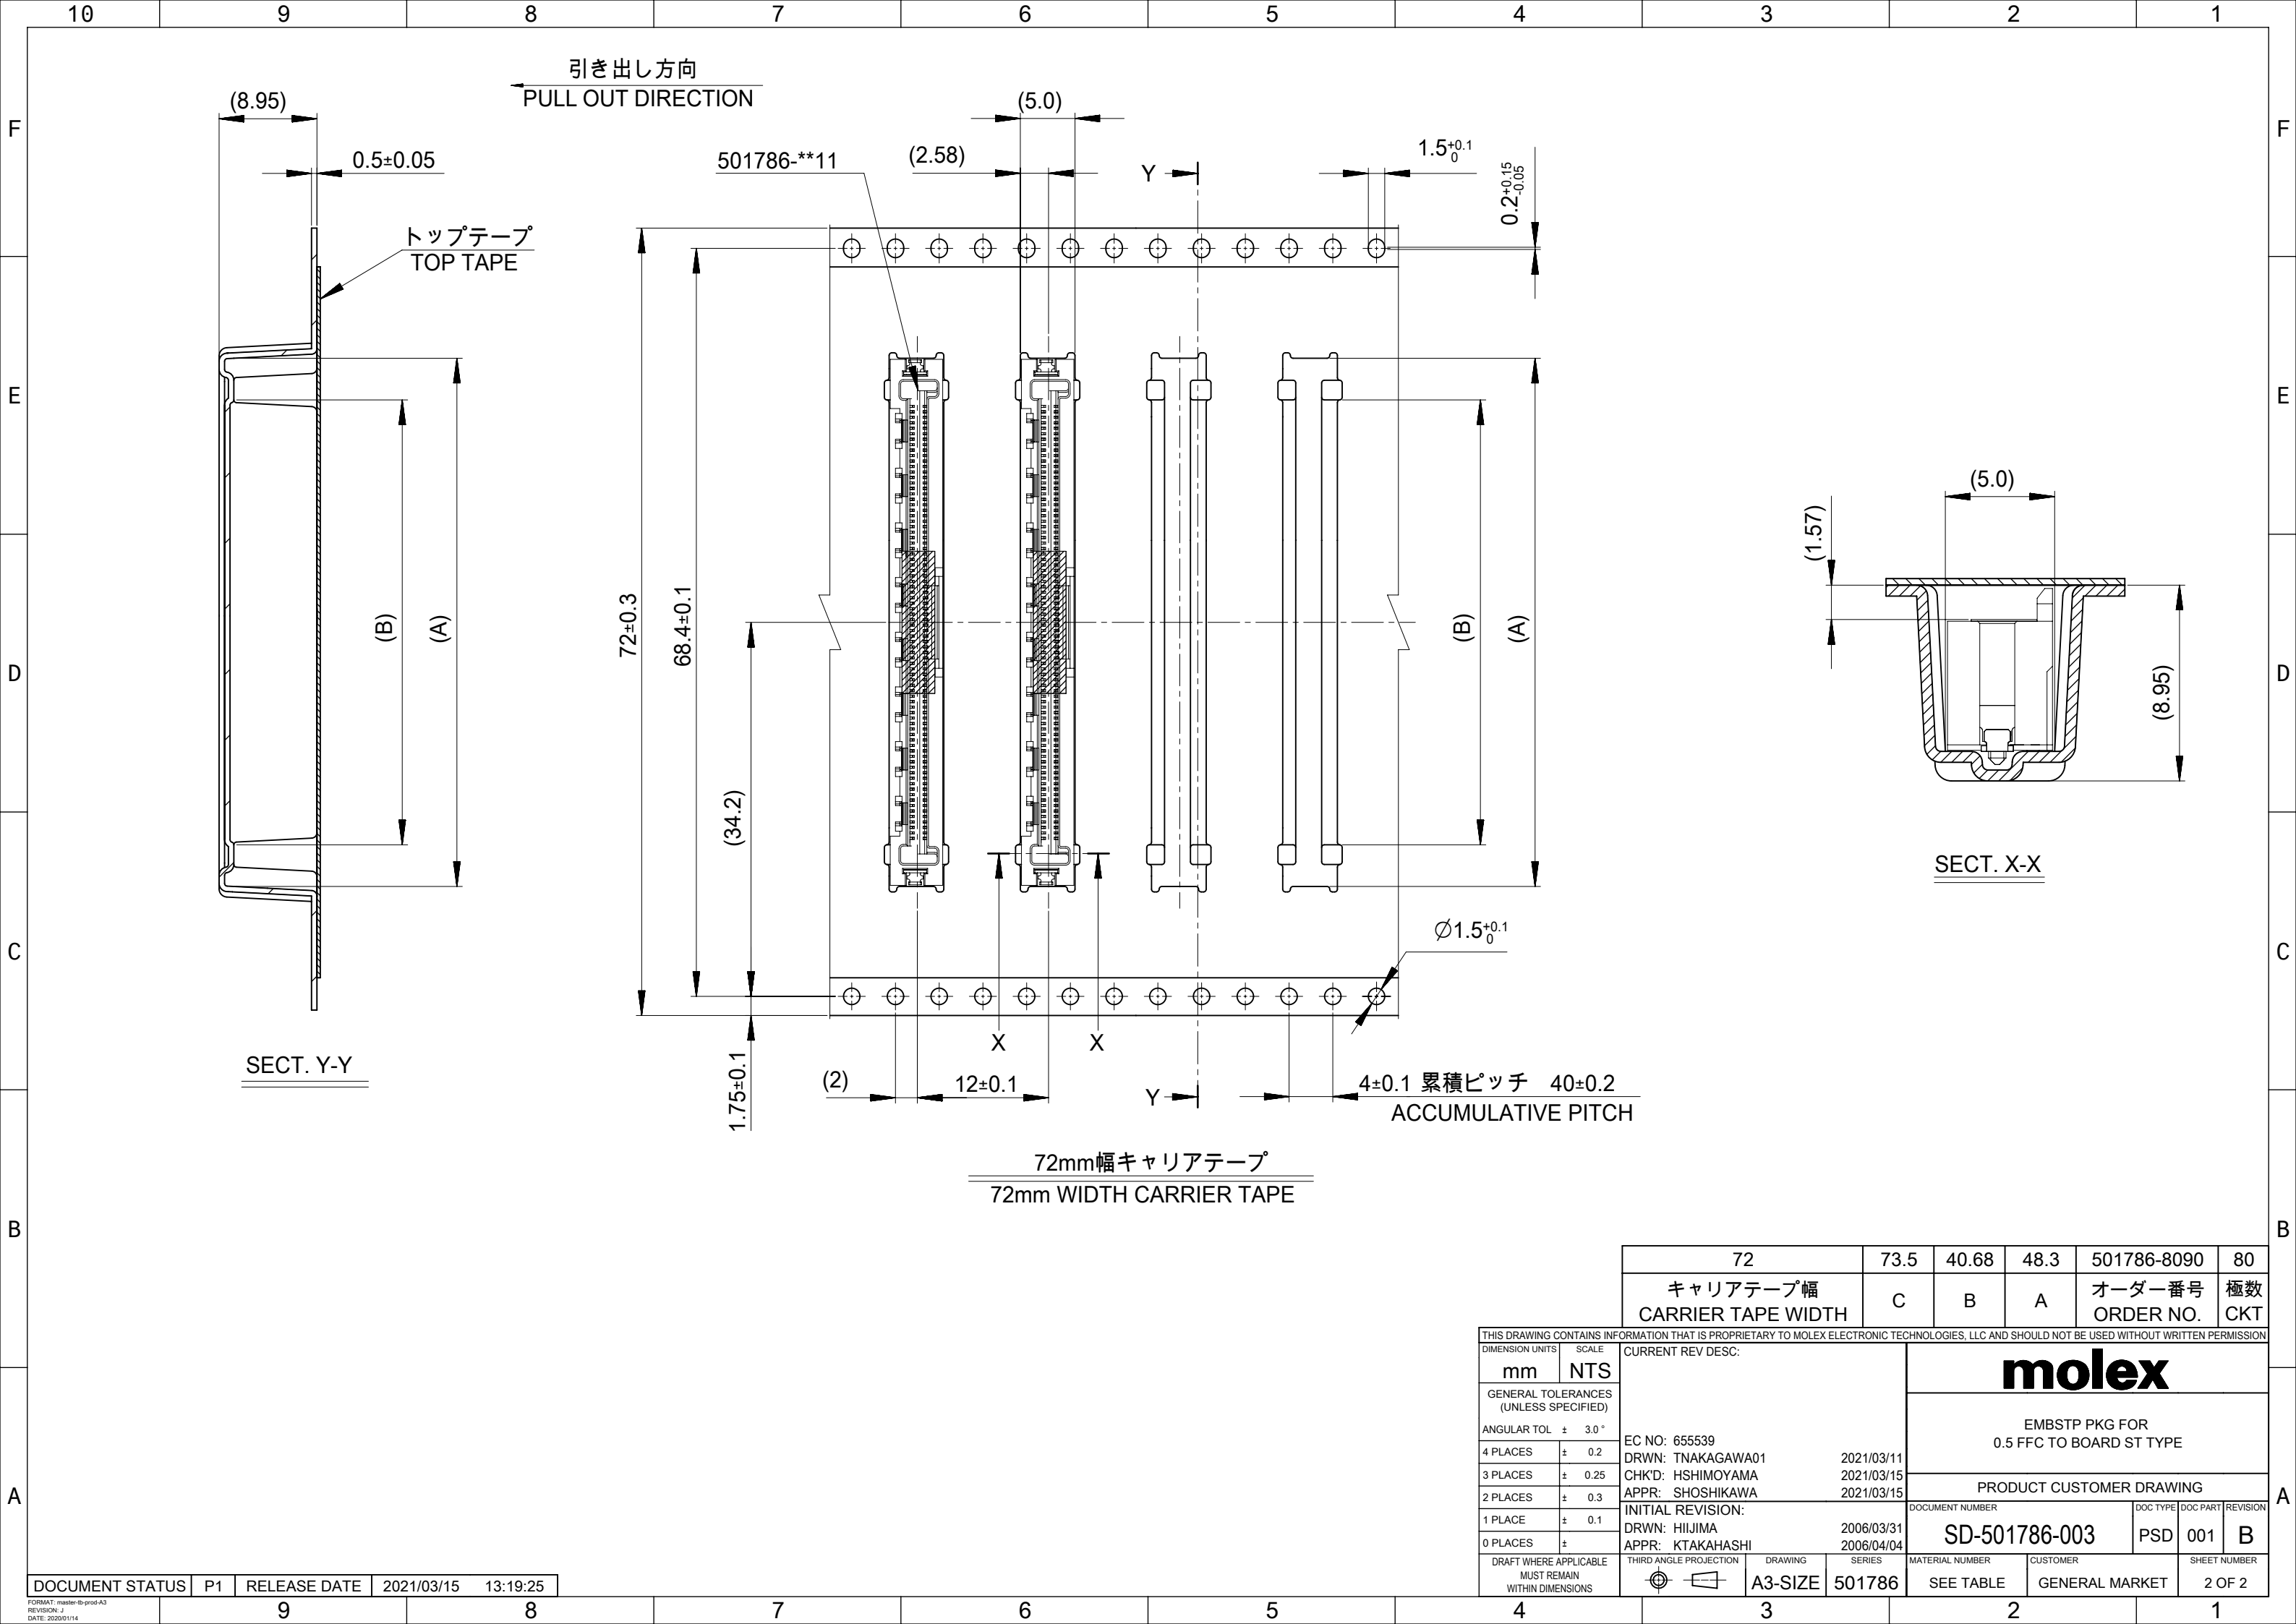

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex							
mm		NTS												
GENERAL TOLERANCES (UNLESS SPECIFIED)				EMBSTP PKG FOR 0.5 FFC TO BOARD ST TYPE										
ANGULAR TOL ± 3.0 °														
4 PLACES		± 0.2		EC NO: 655539 DRWN: TNAKAGAWA01 2021/03/11 CHK'D: HSHIMOYAMA 2021/03/15 APPR: SHOSHIKAWA 2021/03/15										
3 PLACES		± 0.25												
2 PLACES		± 0.3												
1 PLACE		± 0.1		PRODUCT CUSTOMER DRAWING										
0 PLACES		±												
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				INITIAL REVISION:			DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
				DRWN: HIJIMA 2006/03/31 APPR: KTAKAHASHI 2006/04/04			SD-501786-003		PSD		001		B	
THIRD ANGLE PROJECTION				DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER			SHEET NUMBER	
				A3-SIZE		501786		SEE TABLE		GENERAL MARKET			2 OF 2	