

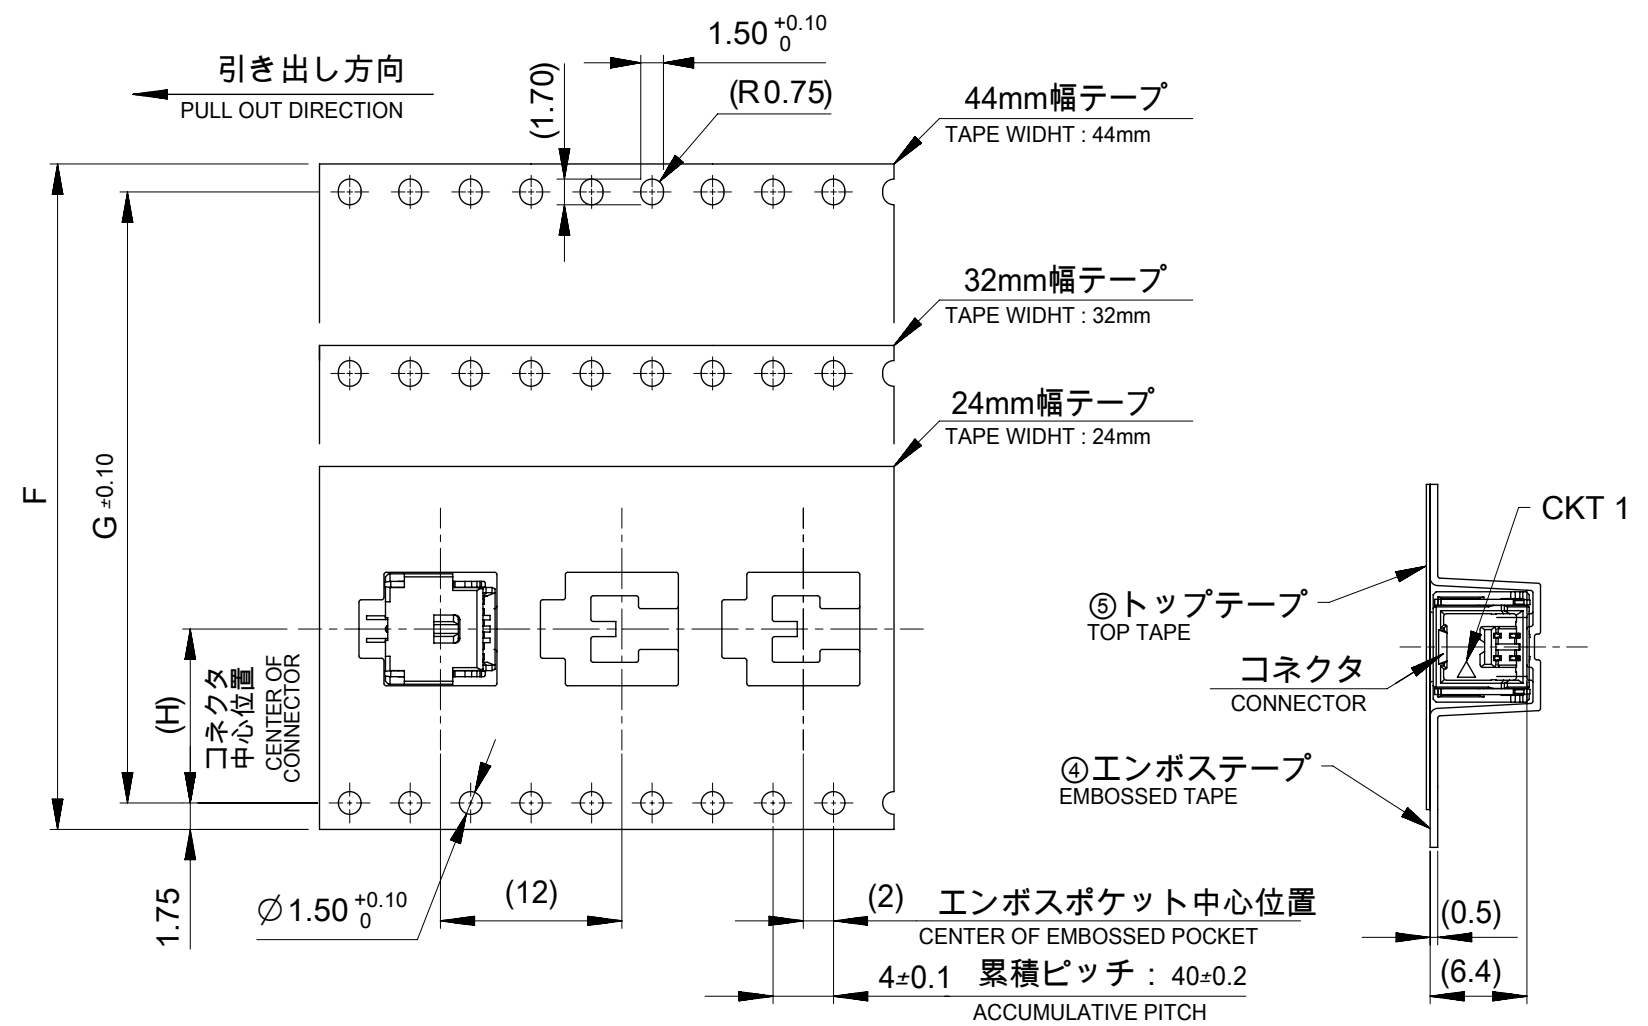


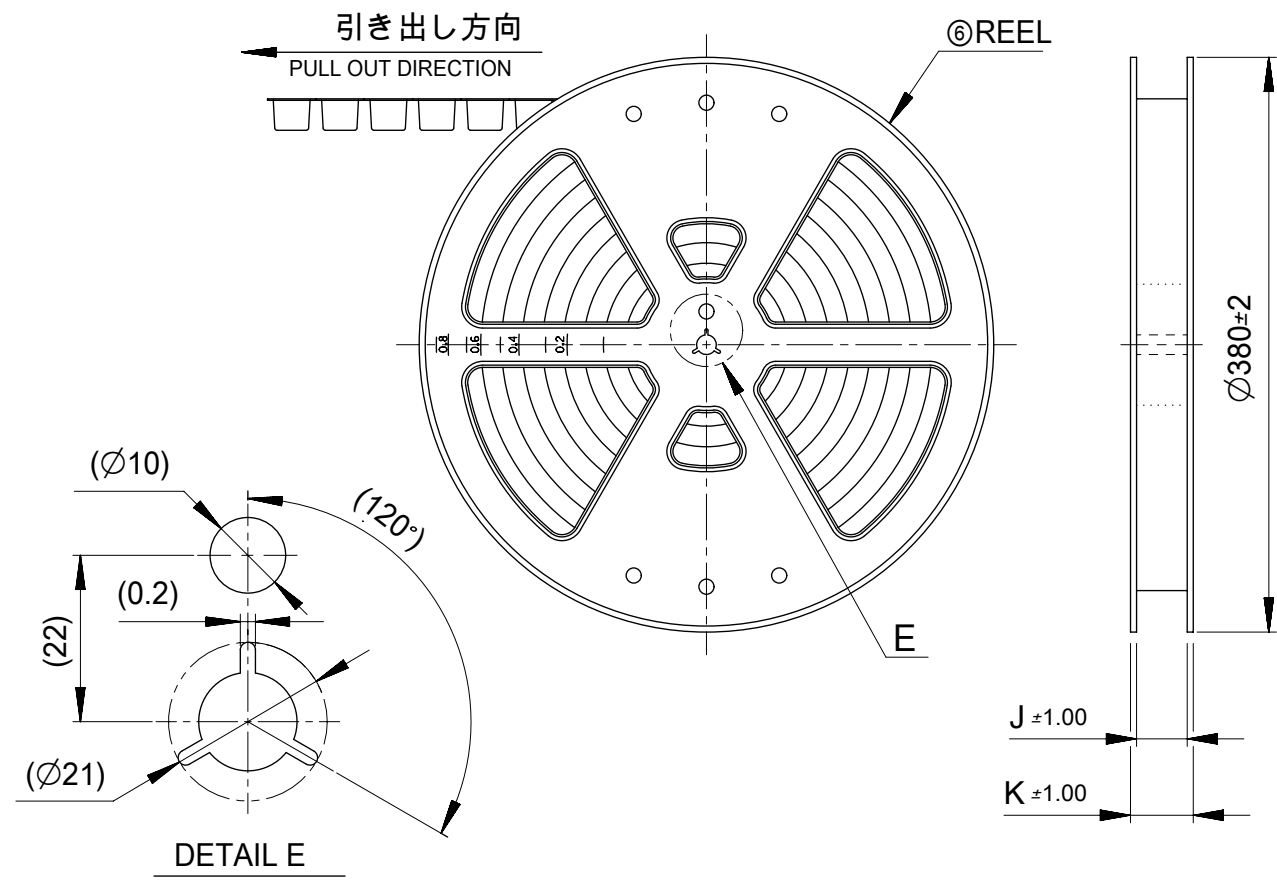

NOTES


5. 梱包数量 : 1,000個/リール
NUMBER OF CONNECTORS: 1,000 PIECES/REEL
6. リードテープ長さ
LEAD TAPE LENGTH

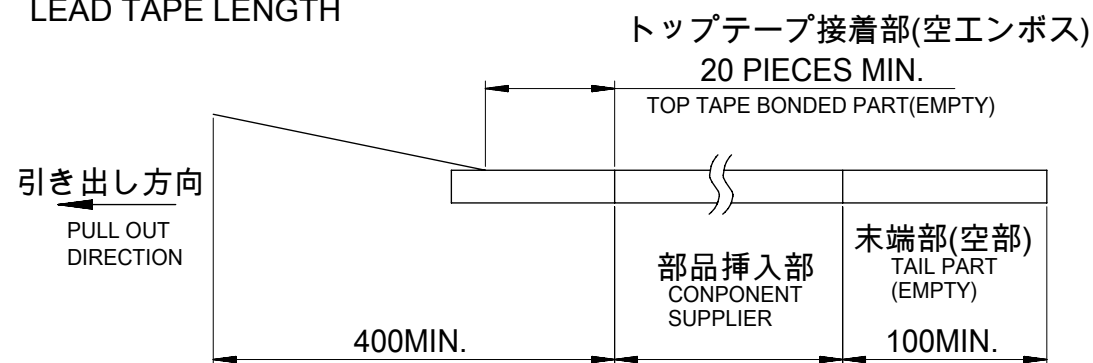

7. トップテープの剥離強度はJIS C0806-3に準拠
TOP TAPE PEELING FORCE IS DEFINED BY JIS C0806-3.
8. 本製品は乾燥剤入り、ハイバリア梱包による納入である
THIS PRODUCT IS DELIVERED IN A HIGH-BARRIER PACKAGE WITH DESICCANT

49.4	45.4	20.2	40.4	44±0.3	15
					14
					13
					12
					11
					10
37.4	33.4	14.2	28.4	32±0.3	9
					8
					7
					6
29.4	25.4	11.5	-	24 ^{+0.3} _{-0.1}	5
					4
					3
					2
K	J	H	G	エンボステープ幅F WIDTH OF TAPE	極数 CIRCUIT NO


番号 No.	部品 PART	材質 MATERIAL
④	エンボステープ EMBOSSSED TAPE	ポリスチレン(PS) POLYSTYLENE
⑤	トップテープ TOP TAPE	ポリエチレン、ポリエチレンテレフタレート POLYETHYLENE (PE), POLYETHYLENE TELEPHTHALATE(PET)
⑥	リール REEL	ポリスチレン (リサイクル材を含む) POLYSTYLENE (CONTAINED RECYCLED MATERIAL)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex				
mm		NTS									
GENERAL TOLERANCES (UNLESS SPECIFIED)							CLIK-MATE 1.5 SINGLE ROW SMT R/A TYPE REC ASSY TIN PLATING				
ANGULAR TOL ± 3.0°											
4 PLACES		± 0.2		EC NO: 638332			PRODUCT CUSTOMER DRAWING				
3 PLACES		± 0.2		DRWN: MIKEDA01 2020/05/26							
2 PLACES		± 0.2		CHK'D: SAKIYAMA 2020/05/27							
1 PLACE		± 0.2		APPR: KOMURAKAMI 2020/05/28			DOCUMENT NUMBER 5025850000-SD				
0 PLACES		± 0.2		INITIAL REVISION: DRWN: MIKEDA01 2019/04/08 APPR: KOMURAKAMI 2020/03/03							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER	
						A3-SIZE		502585		CUSTOMER	
								GENERAL		3 OF 5	

△ 3 適用製品及び各種仕様書
APPLICABLE PRODUCTS AND VARIOUS SPECIFICATIONS

梱包仕様書 PACKAGING SPECIFICATION	PART NUMBER	DOCUMENT NUMBER
	502585 **7*	SPK-502585-001

適用嵌合相手 MATE WITH	HOUSING	TERMINAL (TIN PLATING)	
		#24-28	#26-30
シリーズ番号 SERIES NUMBER	502578	502579 0000	503429 0000
製品仕様書 PRODUCT SPECIFICATION	5025780000-PS		
アプリケーション仕様書 APPLICATION SPECIFICATION	AS-502578-001		

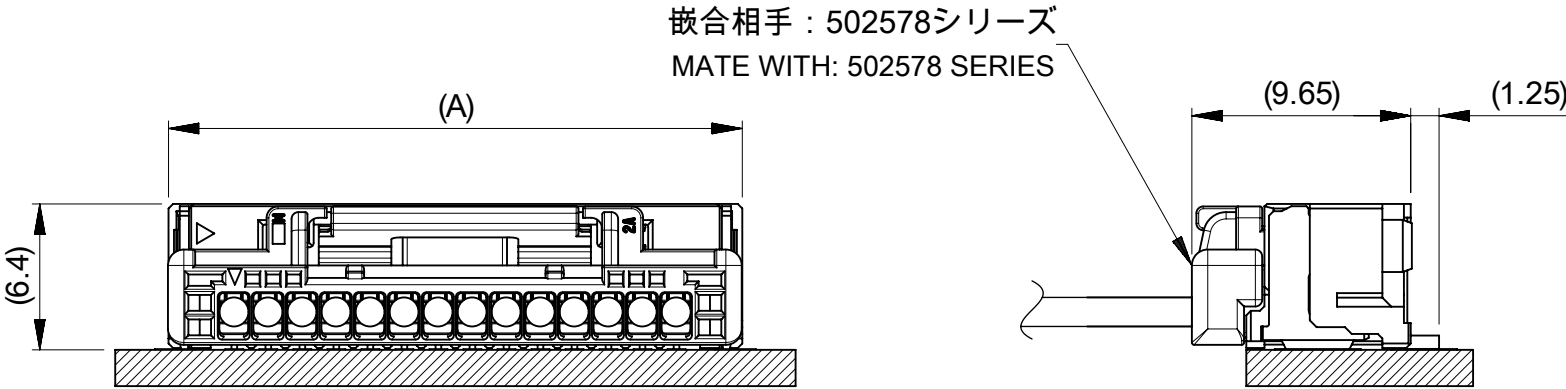

嵌合図
MATED CONNECTORS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																			
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex											
mm		NTS																	
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 638332 DRWN: MIKEDA01 2020/05/26 CHK'D: SAKIYAMA 2020/05/27 APPR: KOMURAKAMI 2020/05/28 INITIAL REVISION: DRWN: MIKEDA01 2019/04/08 APPR: KOMURAKAMI 2020/03/03						CLIK-MATE 1.5 SINGLE ROW SMT R/A TYPE REC ASSY TIN PLATING									
ANGULAR TOL ± 3.0 °										PRODUCT CUSTOMER DRAWING									
4 PLACES		± 0.2								DOCUMENT NUMBER				DOC TYPE		DOC PART		REVISION	
3 PLACES		± 0.2								5025850000-SD				PSD		000		C	
2 PLACES		± 0.2																	
1 PLACE		± 0.2																	
0 PLACES		± 0.2																	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER					
						A3-SIZE		502585				GENERAL		4 OF 5					

