CUI INC
a bel group

SERIES: PQAE50 | DESCRIPTION: DC-DC CONVERTER

FEATURES

- up to 50 W isolated output
- 2:1 input range (18~36 Vdc, 36~75 Vdc)
- single, regulated output
- 1,500 Vdc isolation
- short circuit, over current, input under, voltage protection
- remote on/off
- wide operating temperature range -40~105°C
- efficiency up to 92%
- EN 62368 certified, meets UL 62368




RoHS CE

MODEL

MODEL	input voltage		output voltage	output current		output power	ripple and noise[2]	efficiency[3]
	typ (Vdc)	range[1] (Vdc)	(Vdc)	min (A)	max (A)	max (W)	max (mVp-p)	typ (%)
PQAE50-D24-S3	24	18~36	3.3	0.5	10.0	33	200	91
PQAE50-D24-S5	24	18~36	5	0.5	10.0	50	200	91
PQAE50-D24-S12	24	18~36	12	0.208	4.167	50	250	91
PQAE50-D24-S15	24	18~36	15	0.167	3.333	50	250	91
PQAE50-D24-S24	24	18~36	24	0.104	2.083	50	300	91
PQAE50-D48-S3	48	36~75	3.3	0	10.0	33	200	91
PQAE50-D48-S5	48	36~75	5	0	10.0	50	200	91
PQAE50-D48-S12	48	36~75	12	0	4.167	50	250	92
PQAE50-D48-S15	48	36~75	15	0	3.333	50	250	92
PQAE50-D48-S24	48	36~75	24	0	2.083	50	350	92

Notes:
1. Minimum input voltage is 1V greater for DIN rail and chassis mount models.
2. Ripple and noise are measured at 20 MHz BW by "parallel cable" method with 1 µF ceramic and 10 µF electrolytic capacitors on the output.
3. Measured at nominal input voltage and full load.

PART NUMBER KEY

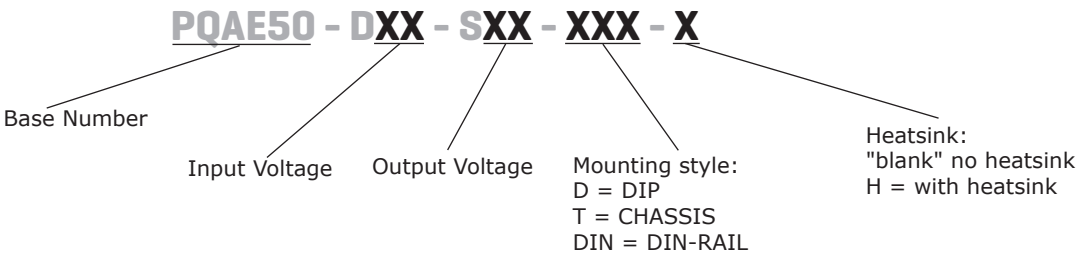

INPUT

parameter	conditions/description	min	typ	max	units
input voltage	24 Vdc input models 48 Vdc input models	18 36	24 48	40 80	Vdc Vdc
start-up voltage	24 Vdc input models 48 Vdc input models			18 36	Vdc Vdc
under voltage protection	24 Vdc input models 48 Vdc input models	11 26	13 30		Vdc Vdc
surge voltage	for maximum of 1 second 24 Vdc input models 48 Vdc input models	 -0.7 -0.7		 50 80	 Vdc Vdc
start-up time	nominal input, constant load		10	120	ms
CTRL[1]	models ON (CTRL open or connect TTL high level, 3~12 Vdc)				
	models OFF (CTRL connect GND or low level, 0~1.2 Vdc)				
	input current (models OFF) 24 Vdc input models 48 Vdc input models		 6 2	 12 12	 mA mA
filter	pi filter				

Note 1. CTRL pin voltage is referenced to GND.

OUTPUT

parameter	conditions/description	min	typ	max	units
line regulation	full load, input voltage from low to high		±0.2	±0.5	%
load regulation	5% to 100% load		±0.5	±1	%
voltage accuracy	5% to 100% load		±1	±3	%
switching frequency	PWM mode		300		kHz
transient recovery time	25% load step change		250	500	µs
transient response deviation	25% load step change 3.3 & 5 Vdc output models other output models		 ±3 ±3	 ±8 ±5	 % %
temperature coefficient	100% load			±0.03	%/°C
trim			±10		%

PROTECTIONS

parameter	conditions/description	min	typ	max	units
over voltage protection[2]	3.3 Vdc output model 5 Vdc output model 12 Vdc output model 15 Vdc output model 24 Vdc ouput model		3.9 6.2 15 18 30		Vdc Vdc Vdc Vdc Vdc
over current protection		120		160	%
short circuit protection	continuous, auto recovery, hiccup				

Note: 2. The module needs to be restarted after output OVP.

SAFETY AND COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output at 1 mA for 1 minute input to output housing at 1 mA for 1 minute	1,500 1,000			Vdc Vdc
isolation resistance	input to output at 500 Vdc	100			MΩ
isolation capacitance	input to output at 100 kHz, 0.1 Vdc		2,200		pF
safety approvals	certified to 62368: EN/IEC				
conducted emissions	CISPR32/EN55032 CLASS B (see Fig.2 for recommended circuit)				
radiated emissions	CISPR32/EN55032 CLASS B (see Fig.2 for recommended circuit)				
ESD	IEC/EN61000-4-2 Contact ±4KV (for 18~36 Vdc) ±6KV (for 36~75 Vdc) perf. Criteria B				
radiated immunity	IEC/EN61000-4-3 10V/m perf. Criteria A				
EFT/burst	IEC/EN61000-4-4 100KHz ±2KV (see Fig.2 for recommended circuit) perf. Criteria B				
surge	IEC/EN61000-4-5 line to line ±2KV (see Fig.2 for recommended circuit) perf. Criteria B				
conducted immunity	IEC/EN61000-4-6 10 Vr.m.s perf. Criteria A				
MTBF	as per MIL-HDBK-217F @ 25°C	1,000,000			hours
RoHS	yes				

ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature	see derating curve	-40		105	°C
storage temperature		-55		125	°C
storage humidity	non-condensing	5		95	%
case temperature	at full load, operating temperature curve range			105	°C
vibration	10~55 Hz, 30 min. along x, y, and z			5	G


MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	without heatsink: horizontal package 50.80 × 25.40 × 11.80 chassis mount 76.00 × 31.50 × 21.20 DIN-Rail mounting 76.00 × 31.50 × 25.80 with heatsink: horizontal package 51.40 × 26.20 × 16.50 chassis mount 76.00 × 31.50 × 25.30 DIN-Rail mounting 76.00 × 31.50 × 29.90				 mm mm mm mm mm mm
case material	aluminum alloy				
weight	without heatsink horizontal package chassis mounting DIN-Rail mounting with heatsink horizontal package chassis mounting DIN-Rail mounting		 42 65 85 50 73 93		 g g g g g g

MECHANICAL DRAWING

units: mm[inch]
pin diameter tolerance: ±0.10[±0.004]
general tolerance: ±0.50[±0.020]


PIN CONNECTIONS	
PIN	Function
1	CTRL
2	GND
3	Vin
4	+Vo
5	0V
6	Trim

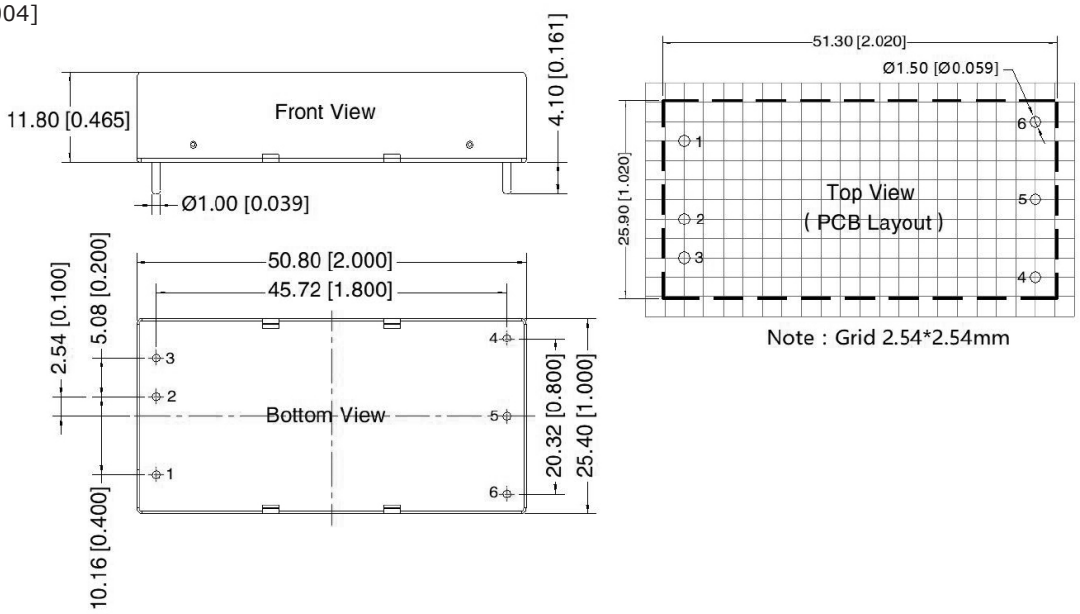

CHASSIS MOUNT

units: mm[inch]
wire range: 24-12 AWG
tightening torque: Max 0.4 N·m
general tolerance: ±1.00[±0.039]


PIN OUT	
PIN	Function
1	CTRL
2	GND
3	Vin
4	+Vo
5	0V
6	Trim

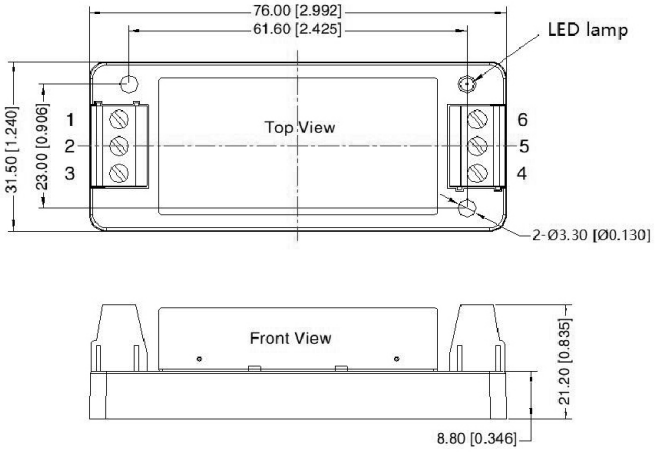

DIN-RAIL MOUNT

units: mm[inch]
mounting rail: TS35
wire range: 24-12 AWG
tightening torque: Max 0.4 N·m
general tolerance: ±1.00[±0.039]

PIN OUT	
PIN	Function
1	CTRL
2	GND
3	Vin
4	+Vo
5	0V
6	Trim

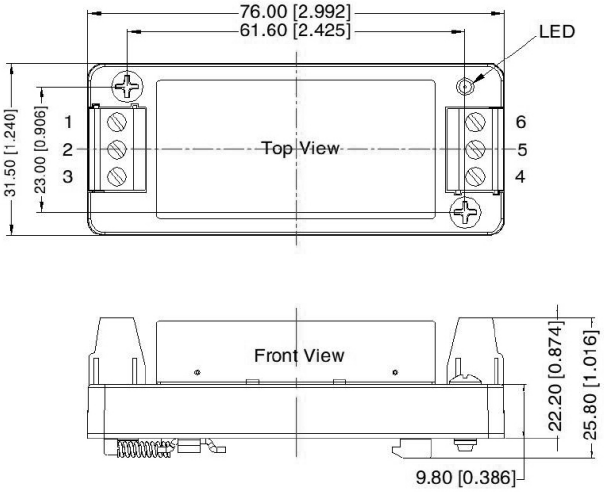



MECHANICAL DRAWING (CONTINUED)

WITH HEATSINK

units: mm[inch]
pin diameter tolerance: ±0.10[±0.004]
general tolerance: ±0.50[±0.020]

PIN CONNECTIONS	
PIN	Function
1	CTRL
2	GND
3	Vin
4	+Vo
5	0V
6	Trim

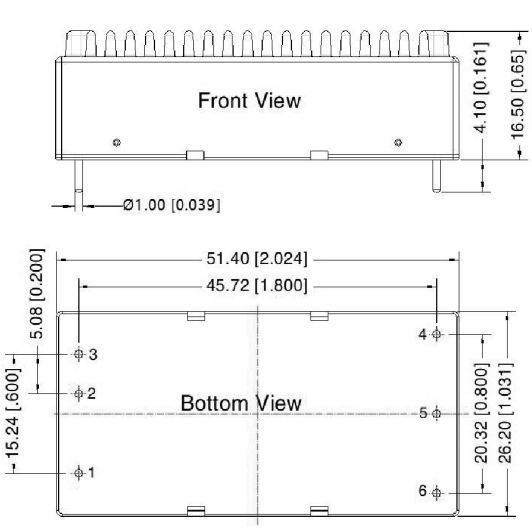

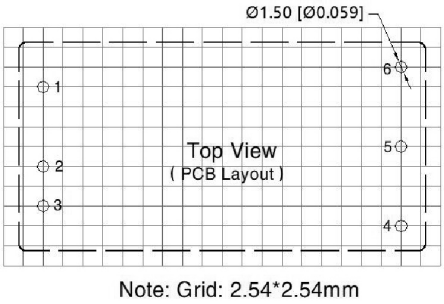


Note: Grid: 2.54*2.54mm

CHASSIS MOUNT WITH HEATSINK

units: mm[inch]
wire range: 24-12 AWG
tightening torque: Max 0.4 N·m
general tolerance: ±1.00[±0.039]


PIN OUT	
PIN	Function
1	CTRL
2	GND
3	Vin
4	+Vo
5	0V
6	Trim

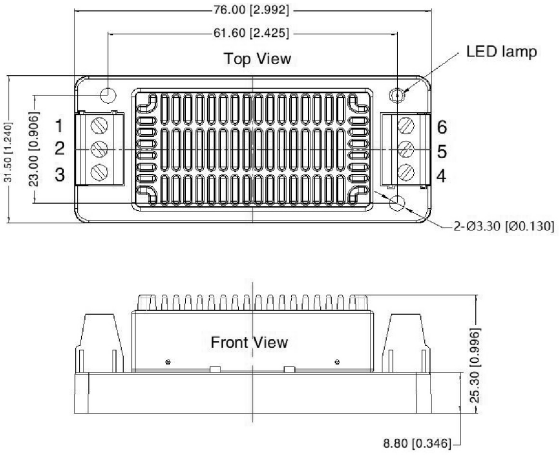

DIN-RAIL MOUNT WITH HEATSINK


units: mm[inch]
mounting rail: TS35
wire range: 24-12 AWG
tightening torque: Max 0.4 N·m
general tolerance: ±1.00[±0.039]

PIN OUT	
PIN	Function
1	CTRL
2	GND
3	Vin
4	+Vo
5	0V
6	Trim

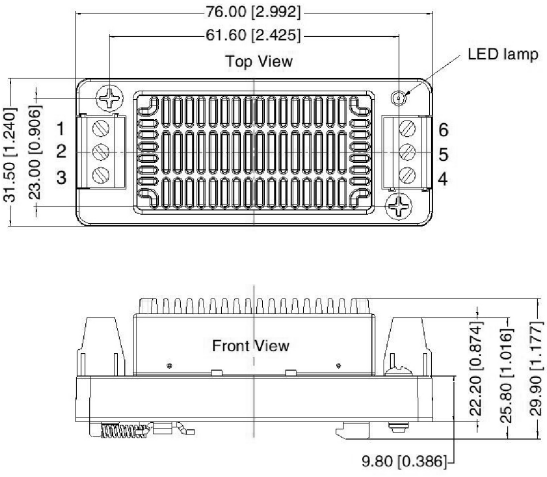


DERATING CURVES


TEMPERATURE DERATING CURVE

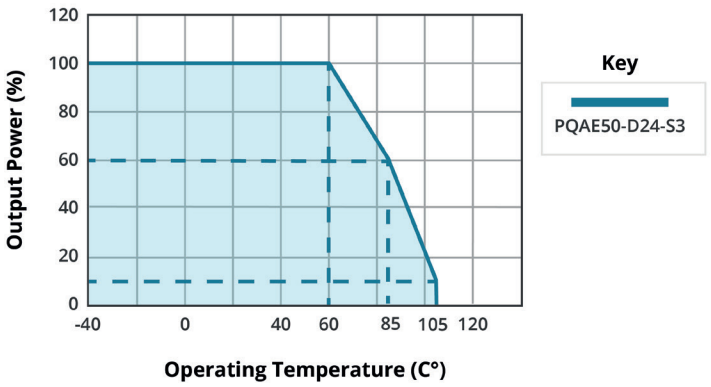


TEMPERATURE DERATING CURVE

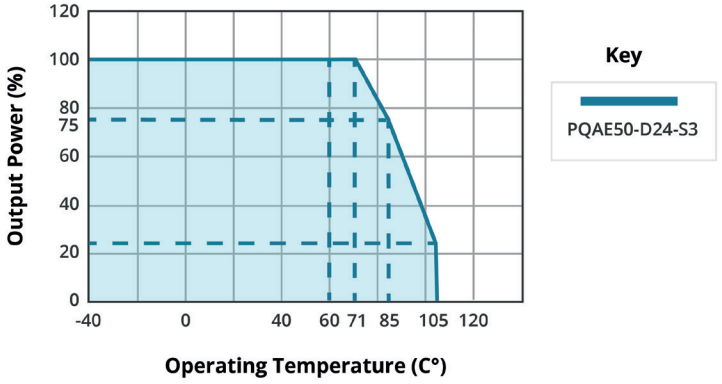

TEMPERATURE DERATING CURVE
3.3 Vdc & 5 Vdc output
48 Vdc input

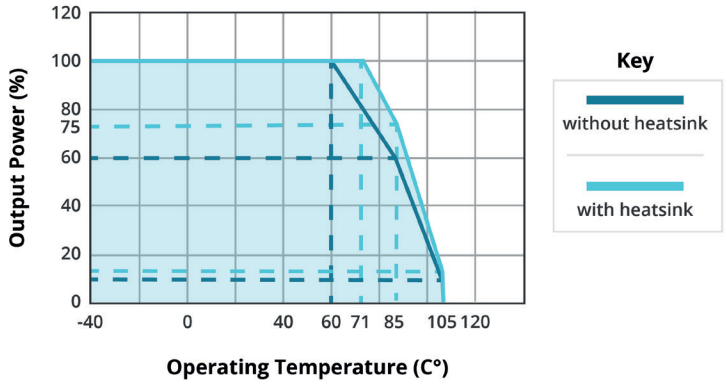

TEMPERATURE DERATING CURVE
12 Vdc, 15 Vdc & 24 Vdc output
48 Vdc input

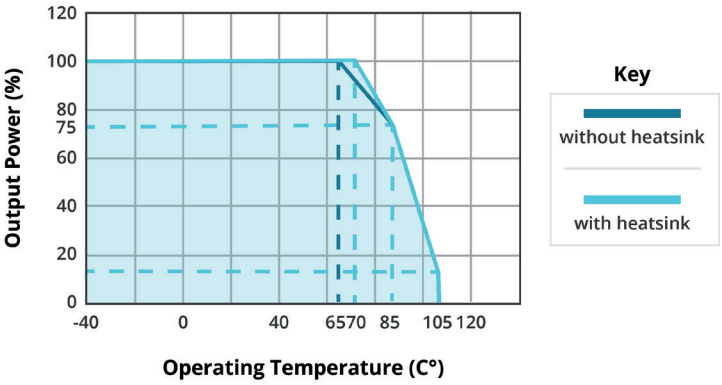

APPLICATION DESIGN REFERENCE

If you want to further reduce the input and output ripple, a filter capacitor may be connected to the input and output terminals (Figure 1) provided that the capacitance is less than the maximum capacitive load of the model, otherwise start-up problems may be caused if the capacitance is too large.

Figure 1

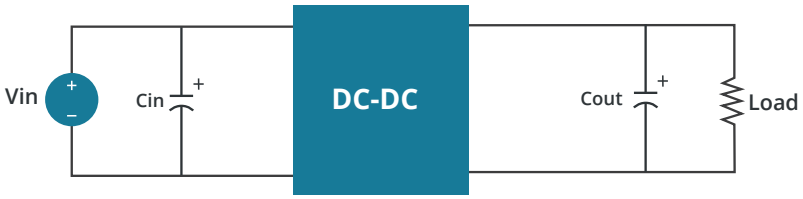


Table 1

Vout (Vdc)	Cin (μF)	Cout (μF)
3.3	100μF	470μF/10V
5		470μF/10V
12		100μF/25V
15		100μF/25V
24		47μF/50V

EMC RECOMMENDED CIRCUIT

Figure 2

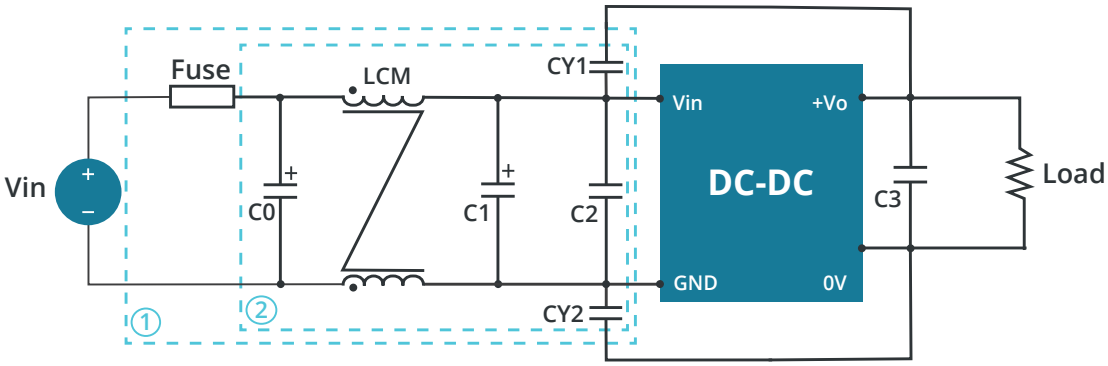


Table 2


MODEL	Vin: 24V	Vin: 48V
FUSE	T/4A/250Vac	T/2A/250Vac
C0	680μF/50V	330μF/100V
LCM	2.2mH	2.2mH
C1	330μF/50V	330μF/100V
C2	4.7μF/50V	2.2μF/100V
CY1, CY2	Y1 Safety capacitor 2.2nF/250Vac	Y1 Safety capacitor 3.3nF/250Vac
C3	refer to Cout in Fig. 1	refer to Cout in Fig. 1

APPLICATION DESIGN REFERENCE (CONTINUED)


TRIM FUNCTION FOR OUTPUT VOLTAGE ADJUSTMENT (OPEN IF UNUSED)

Figure 3

Trim up

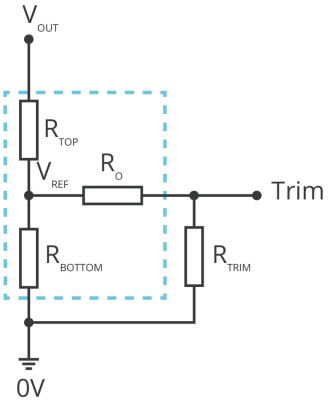

Trim down

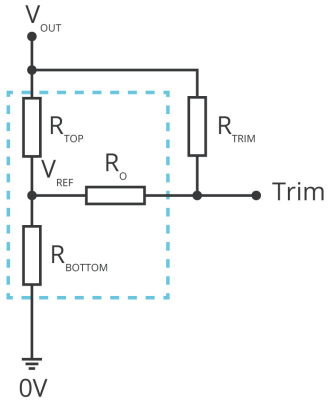

$$R_{TRIM} = \frac{a\ R_{BOTTOM}}{R_{BOTTOM} - a} - R_O \qquad a = \frac{V_{REF}}{V_O - V_{REF}} \bullet R_{TOP}$$

Formula for Trim up

$$R_{TRIM} = \frac{a\ R_{TOP}}{R_{TOP} - a} - R_O \qquad a = \frac{V_O - V_{REF}}{V_{REF}} \bullet R_{BOTTOM}$$

Formula for Trim down

Note: Trim resistor connection (dashed line shows internal resistor network).

Table 3

Model number	Vout adjustable value	RT	R1	R2	R3	Vref
	(V)	(KΩ)	(KΩ)	(KΩ)	(KΩ)	(V)
PQAE50-D24-S3	Up: 3.63 Down: 2.97	15.0 18.7	4.83 4.83	2.87 2.87	4.7 4.7	1.24 1.24
PQAE50-D24-S5	Up: 5.5 Down: 4.5	13.3 5.4	2.97 2.97	2.87 2.87	4.7 4.7	2.5 2.5
PQAE50-D24-S12	Up: 13.2 Down: 10.8	7.6 60.7	10.90 10.90	2.87 2.87	15 15	2.5 2.5
PQAE50-D24-S15	Up: 16.5 Down: 13.5	8.9 90.2	14.35 14.35	2.87 2.87	15 15	2.5 2.5
PQAE50-D24-S24	Up: 26.4 Down: 21.6	21.6 185.9	24.77 24.77	2.87 2.87	5.1 5.1	2.5 2.5
PQAE50-D48-S3	Up: 3.63 Down: 2.97	10 13.5	4.83 4.83	2.87 2.87	10 10	1.24 1.24
PQAE50-D48-S5	Up: 5.5 Down: 4.5	4.3 1.5	2.87 2.87	2.87 2.87	10 10	2.5 2.5
PQAE50-D48-S12	Up: 13.2 Down: 10.8	7.6 60.7	10.90 10.90	2.87 2.87	15 15	2.5 2.5
PQAE50-D48-S15	Up: 16.5 Down: 13.5	8.9 90.2	14.35 14.35	2.87 2.87	15 15	2.5 2.5
PQAE50-D48-S24	Up: 26.4 Down: 21.6	21.6 185.9	48.77 48.77	2.87 2.87	5.1 5.1	2.5 2.5

Note: Value for R_{TOP}, R_{BOTTOM}, R_O, and V_{REF} refer to Table 3 (fixed internal values).
R_{TRIM}: Trim resistance
a: User-defined parameter, no actual meanings
V_{OUT}: Nominal output voltage

REVISION HISTORY

rev.	description	date
1.0	initial release	11/16/2020
1.01	part number key updated	12/14/2020
1.02	mechanical drawings updated	01/12/2021
1.03	datasheet updated	07/29/2021
1.04	updated notes in model table	10/01/2021
1.05	application design reference section updated	02/24/2022
1.06	protections updated, application design reference section updated	07/22/2022

The revision history provided is for informational purposes only and is believed to be accurate.

CUI INC
a bel group

Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.