



1

2

3

4

5

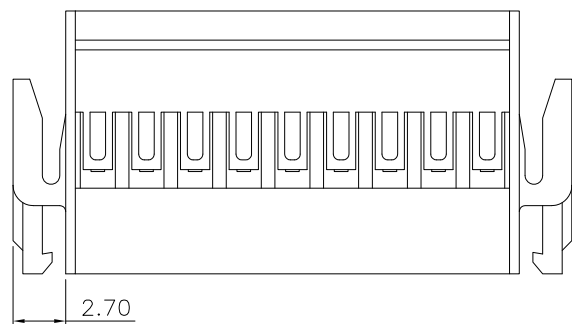



Specifications:

Current Rating: 3.0A AC,DC
 Voltage Rating: 250V AC,DC
 Contact Resistance: 20m ohm.Max
 Insulation Resistance: 1000M ohm.Min
 Withstanding Voltage: 1000V AC/Minute
 Operating Temperature Range: -25°C ~ +85°C

Material:

Insulator: Nylon 66 (UL94V-0)
 Insulator Color: White
 Mates with 53325 Terminal

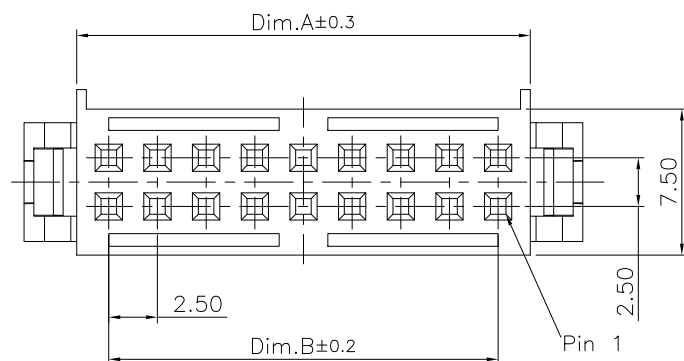

Dimension Information:

Circuits	Dim.A	Dim.B
8	10.80	7.50
10	13.30	10.00
12	15.80	12.50
14	18.30	15.00
16	20.80	17.50
18	23.30	20.00
20	25.80	22.50

RoHS Compliant

DRAWN:

GENERAL TOLERANCE:

.X=±0.20

.XX=±0.15

CHECKED:


UNIT: MM

SCALE:1:1

APPROVAL:

SHEET: 1 / 2

PROJECTION:



CnC Tech

Industrial Cable and Connector Technology

DESCRIPTION: WIRE-TO BOARD HOUSING, 2.5mm,
SIDE LOCK

PART NO:

53025-XX

SIZE

A4

REV

DATE

FILE

BY

17-Nov-2020