

IP67 Sealed Toggle Switches

Highest quality for the most demanding applications



3100 Series

Standard 15/32" diameter bushing. Standard Bat length is .560".

| Current Rating | Catalog No. | | Action | Termination |
|-----------------------|-------------|-------|------------------|--------------------------|
| 6A -125VAC, 3A-250VAC | 3105C | Fig 1 | SPST on-none-off | .250" QC |
| 6A -125VAC, 3A-250VAC | 3105D | Fig 2 | SPST on-none-off | 6" Wire Leads, #16 Gauge |
| 6A -125VAC, 3A-250VAC | 3101C | Fig 1 | SPDT on-none-on | .250" QC |
| 6A -125VAC, 3A-250VAC | 3101D | Fig 2 | SPDT on-none-on | 6" Wire Leads, #16 Gauge |
| 6A -125VAC, 3A-250VAC | 3102C | Fig 1 | SPDT on-off-on | .250" QC |
| 6A -125VAC, 3A-250VAC | 3102D | Fig 2 | SPDT on-off-on | 6" Wire Leads, #16 Gauge |

3100 Series Toggle

Electrical Rating: 6A - 125 VAC , 3A - 250 VAC

Life Cycles: 25,000 **Electrical** (Optional 75,000 with silver rocker) 50,000 **Mechanical** (Optional 100,000 with silver rocker)


Operating Temp: -10 °C to +65 °C

Sealing: seal tested per IP67 standards to withstand submersion in water to a depth of 1 meter for 30 minutes, Meets IP68

UL Recognized File No. E66512, Vol 1, Sec.12

Dielectric Strength 1000 Volts RMS Minimum

Mounting Means 15/32" Bushing, Keyway .078 - .083 Wide X .037 - .043 Deep, Standard Hardware supplied

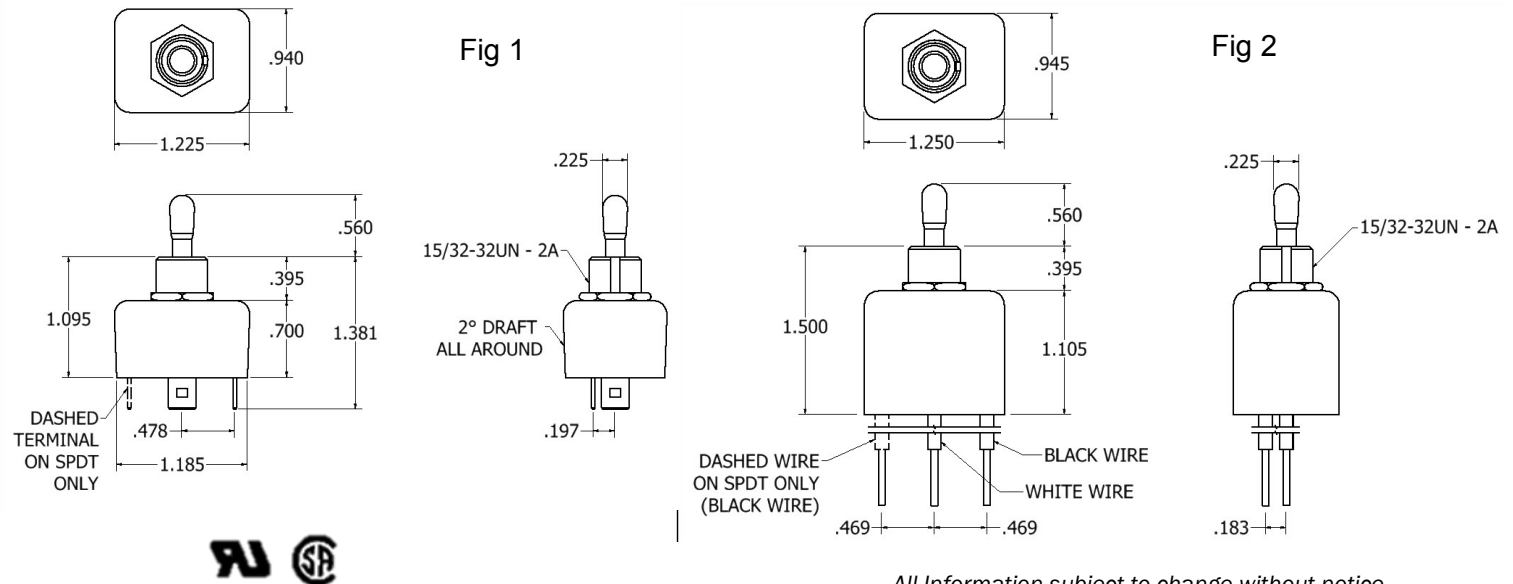

All Information subject to change without notice