
PROPRIETARY INFORMATION:
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

REVISION

REV	DESCRIPTION	DATE	APPROVED
C	INITIAL RELEASE	12/14/00	PS
D	REDRAW TO NEW FORMAT, ADD cUL, RFS.4855, DMR	11/02/04	BS

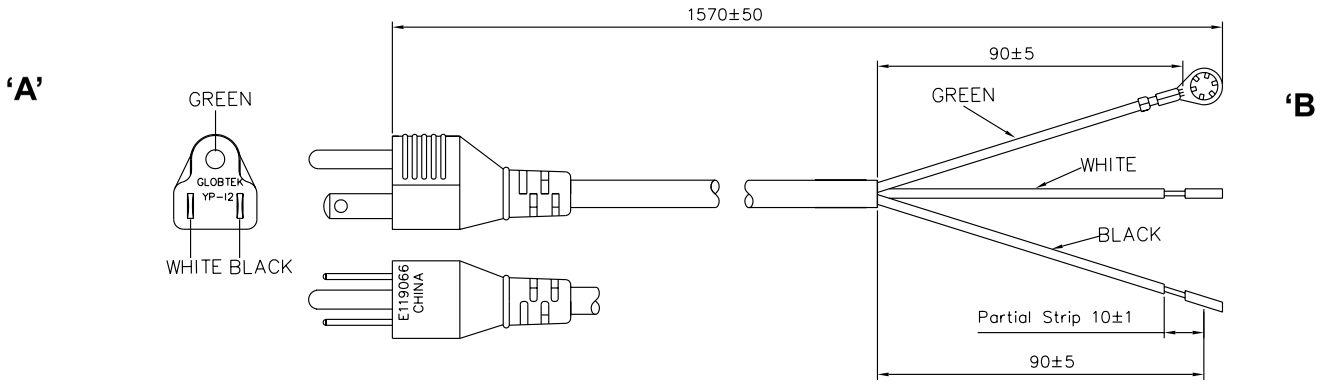

1.GENERAL SPECIFICATIONS:

RATING:	10A / 125V AC
CABLE TYPE / SIZE:	SVT, # 18 AWG, 3 CONDUCTOR
TEMPERATURE RATING:	60° C MIN.
CONDUCTOR COLORS:	BLACK / WHITE / GREEN
CABLE JACKET COLOR:	BLACK
OVERALL LENGTH (L):	1570 ± 50 mm (5 FT)
CABLE OUTER DIAMETER:	6.3 ± 0.1 mm
END 'A' PLUG;	NEMA 5-15P
END 'B'	SEE TERMINATION TABLE
APPROVALS PLUG:	UL, CSA OR cUL
APPROVALS CABLE:	UL, CSA OR cUL

2.PACKING:

BULK PACKED, BUNDLES OF 25.
MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

3.NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

OR

2. CABLE STRANDING IS 41/34.

CONDUCTOR TERMINATION TABLE:

Wire	Color	ROJ± 5 mm	PARTIALSTRIP	TERMINATION
NEUTRAL	WHT	90	10	PARTIAL STRIP
LINE	BLK	90	10	PARTIAL STRIP
GROUND	GRN	90	-	# 6 RING (SERRATED) TYPE T-6895/ J6176BS-2 OR EQUIVALENT

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES

TABULATION BLOCK

REV.	D								
SHEET	1								

TOLERANCES:
DECIMALS .xx +/- 0.1 .xxx +/- .005 ANGULAR +/- 1°
MILLIMETERS .xx +/- 0.3 .xxx +/- .013 ANGULAR +/- 1°

GlobTek, Inc.
www.globtek.com
186 Veterans Dr. Northvale, NJ 07647
Tel. 201-784-1000 Fax 201.784.0111

INIT.BY: DMR	DATE: 11/02/04	DWG TITLE: NORTH AMERICAN NON-DETACHABLE CORDSET	
DRAWN: NF	DATE: 11/02/04	FSCN No.: G, YL / SIZE: A	REV. D
APRVD: DMR	DATE: 11/02/04	SCALE: NONE	PART NO: **3021445F200T** / SHEET 1/1

Contents of this document are subject to change without prior notice

Foot Note:
Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL,CSA or EN Standards for proper installation instruction.

Limitation of Use:
Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.