

| TITLE: | BOOT ,ATM ,6 WAY ,PLUG | DWG NO: | ATM6S-BT-XX | REV: | A1 | SH: | 1 | OF: | 1 |
|---|---|---|---|---|---|---|---|---|---|

| REVISIONS | | | | | |
|---|---|---|---|---|---|
| REV | ECO | DESCRIPTION | DATE | BY | APPR |
| A1 | - | RELEASE NUMBER | 13MAR20 | BROOK | TOMMY |

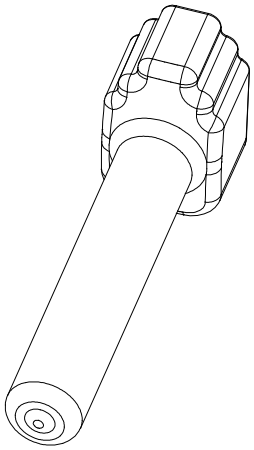

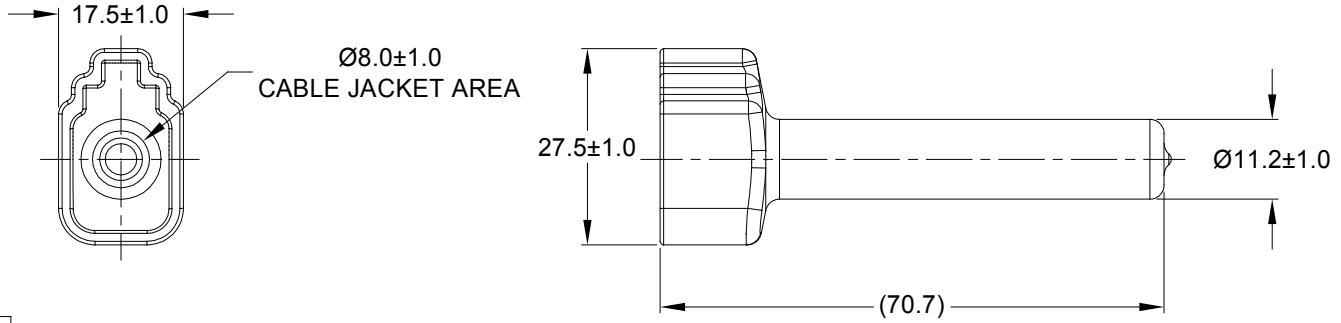


| PART NUMBER CHART | |
|---|---|
| COLOR | PART NUMBER |
| GREY | ATM6S-BT |
| BLACK | ATM6S-BT-BK |
| YELLOW | ATM6S-BT-YW |

NOTES: UNLESS OTHERWISE SPECIFIED

1. THIS PART IS USED ON ATM06-6S PLUG WITH ANY MODIFICTION THAT DOES NOT INCLUDE AN END CAP.

2. TEMPERATURE RATING : -29°C TO +100°C [-20°F TO +212°F]

3. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

| | SEE PART NUMBER CHART | REF : DTM6S-BT , DTM6S-BT-BK , STM6S-BT-YW | |
|---|---|---|---|
| | PART NUMBER | DESCRIPTION | ITEM |
| QUANTITY | MATERIALS LIST | | |

**UNLESS OTHERWISE SPECIFIED**
1) All dimensions are in metric(mm).
2) Tolerances are as follows:
1 PL DEC ±0.30 | Fractions ±1/64
2 PL DEC ±0.15 | Angles ±1°
3 PL DEC ±0.08
3) Note reference = X

MATERIAL SPECIFICATIONS: PVC

PROCESS SPECIFICATIONS:

NEXT ASS'Y:

| SIGNATURES | | DATE |
|---|---|---|
| DRAWN: | BROOK.DING | 13MAR20 |
| CHECKED: | ORION.LI | 16MAR20 |
| ENGINEER: | | |
| APPROVAL: | TOMMY.XIE | 17MAR20 |
| CUSTOMER: | | |

THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.

Amphenol
Sine Systems - www.amphenol-sine.com
44724 Morley Drive
Clinton Township, MI 48036

BOOT ,ATM ,6 WAY ,PLUG

| SIZE | TYPE | DWG NO: | REVISION |
|---|---|---|---|
| A | C- | ATM6S-BT-XX | A1 |

SCALE: NONE SHEET 1 OF 1