EPC2069 – Enhancement Mode Power Transistor

V_{DS}, 40 V
$R_{DS(on)}$, 2.25 mΩ
I_D, 80 A



EFFICIENT POWER CONVERSION

RoHS Halogen-Free

Gallium Nitride's exceptionally high electron mobility and low temperature coefficient allows very low $R_{DS(on)}$, while its lateral device structure and majority carrier diode provide exceptionally low Q_G and zero Q_{RR}. The end result is a device that can handle tasks where very high switching frequency, and low on-time are beneficial as well as those where on-state losses dominate.

Maximum Ratings			
PARAMETER		VALUE	UNIT
V_{DS}	Drain-to-Source Voltage (Continuous)	40	V
	Drain-to-Source Voltage (up to 10,000 5 ms pulses at 150°C)	48	
I_D	Continuous (T_A = 25°C)	80	A
	Pulsed (25°C, T_{PULSE} = 300 µs)	422	
V_{GS}	Gate-to-Source Voltage	6	V
	Gate-to-Source Voltage	-4	
T_J	Operating Temperature	–40 to 150	°C
T_{STG}	Storage Temperature	–40 to 150	

Thermal Characteristics			
PARAMETER		TYP	UNIT
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	0.35	°C/W
$R_{\theta JB}$	Thermal Resistance, Junction-to-Board	1.1	
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient (Note 1)	46	

Note 1: $R_{\theta JA}$ is determined with the device mounted on one square inch of copper pad, single layer 2 oz copper on FR4 board.
See https://epc-co.com/epc/documents/product-training/Appnote_Thermal_Performance_of_eGaN_FETs.pdf for details.



EPC2069 eGaN® FETs are supplied only in passivated die form with solder bars.
Die Size: 3.25 x 3.25 mm

Applications

- High frequency DC-DC Converters
- BLDC Motor Drives
- Sync Rectification for AC-DC and DC-DC

Benefits

- High Power Density
- High Efficiency
- No Reverse Recovery
- Ultra Low Q_G
- Small Footprint
- High Frequency Capability

Static Characteristics (T_J = 25°C unless otherwise stated)						
PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
BV_{DSS}	Drain-to-Source Voltage	V_{GS} = 0 V, I_D = 0.7 mA	40			V
I_{DSS}	Drain-Source Leakage	V_{GS} = 0 V, V_{DS} = 32 V		0.01	0.7	mA
I_{GSS}	Gate-to-Source Forward Leakage	V_{GS} = 5 V		0.01	4	
	Gate-to-Source Forward Leakage#	V_{GS} = 5 V, T_J = 125°C		0.05	9	
	Gate-to-Source Reverse Leakage	V_{GS} = -4 V		0.01	0.8	
$V_{GS(TH)}$	Gate Threshold Voltage	V_{DS} = V_{GS}, I_D = 14 mA	0.8	1.4	2.5	V
$R_{DS(on)}$	Drain-Source On Resistance	V_{GS} = 5 V, I_D = 30 A		1.6	2.25	mΩ
V_{SD}	Source-Drain Forward Voltage#	I_S = 0.5 A, V_{GS} = 0 V		1.6		V

#Defined by design. Not subject to production test.

Dynamic Characteristics (T_J = 25°C unless otherwise stated)						
PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
C_{ISS}	Input Capacitance	V_{DS} = 20 V, V_{GS} = 0 V		1351	2027	pF
C_{RSS}	Reverse Transfer Capacitance			32		
C_{OSS}	Output Capacitance			1044	1566	
$C_{OSS(ER)}$	Effective Output Capacitance, Energy Related (Note 2)	V_{DS} = 0 to 20 V, V_{GS} = 0 V		1465		
$C_{OSS(TR)}$	Effective Output Capacitance, Time Related (Note 3)			1647		
R_G	Gate Resistance			0.4		Ω
Q_G	Total Gate Charge	V_{DS} = 20 V, V_{GS} = 5 V, I_D = 30 A		12.5	16.2	nC
Q_{GS}	Gate-to-Source Charge	V_{DS} = 20 V, I_D = 30 A		3.9		
Q_{GD}	Gate-to-Drain Charge			2.4		
$Q_{G(TH)}$	Gate Charge at Threshold			2.9		
Q_{OSS}	Output Charge	V_{DS} = 20 V, V_{GS} = 0 V		32	48	
Q_{RR}	Source-Drain Recovery Charge			0		

Note 2: $C_{OSS(ER)}$ is a fixed capacitance that gives the same stored energy as C_{OSS} while V_{DS} is rising from 0 to 50% BV_{DSS}.
Note 3: $C_{OSS(TR)}$ is a fixed capacitance that gives the same charging time as C_{OSS} while V_{DS} is rising from 0 to 50% BV_{DSS}.

Figure 1: Typical Output Characteristics at 25°C

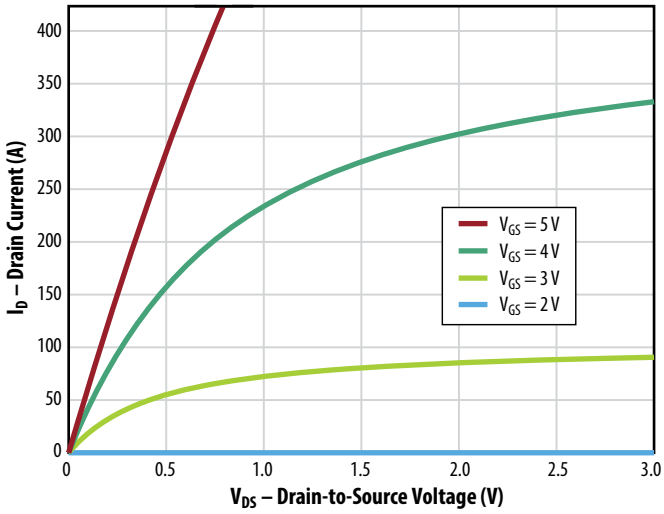

Figure 2: Typical Transfer Characteristics

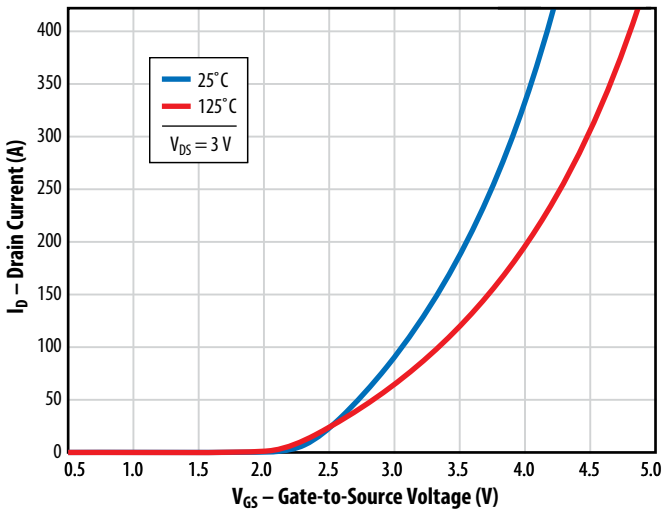

Figure 3: $R_{DS(on)}$ vs. V_{GS} for Various Drain Currents

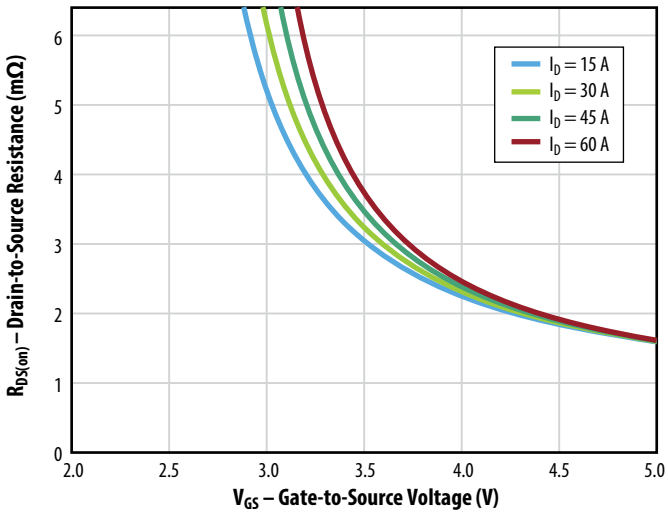

Figure 4: $R_{DS(on)}$ vs. V_{GS} for Various Temperatures

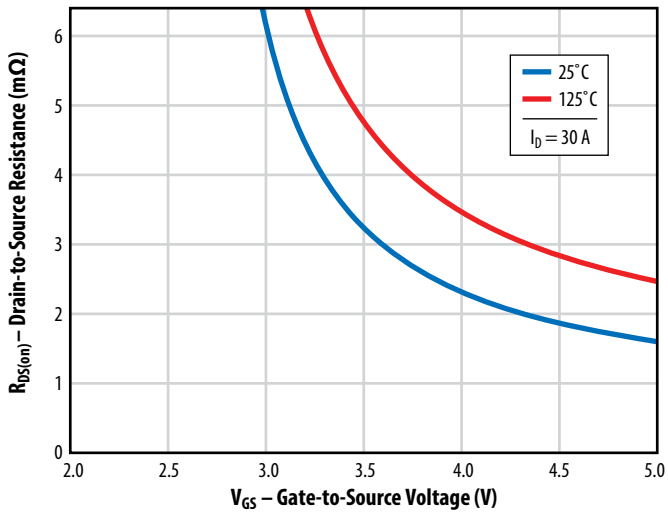

Figure 5a: Capacitance (Linear Scale)

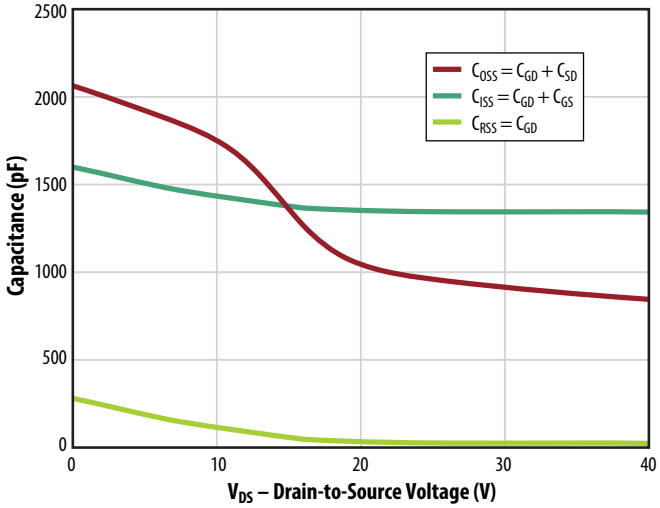

Figure 5b: Capacitance (Log Scale)

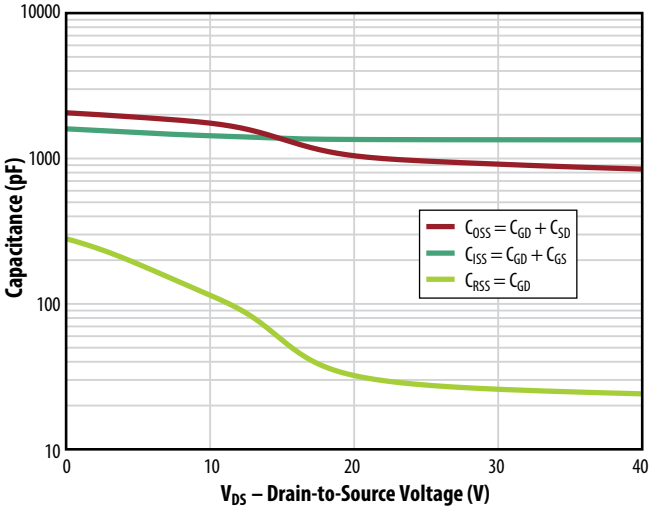

Figure 6: Output Charge and C_{OSS} Stored Energy

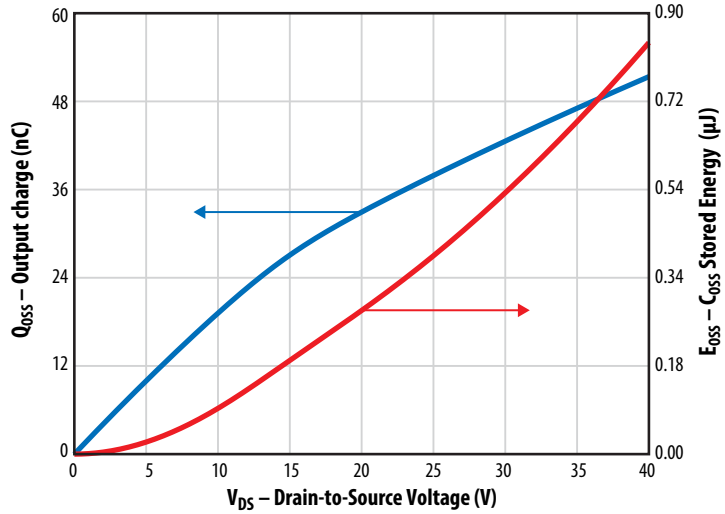

Figure 7: Gate Charge

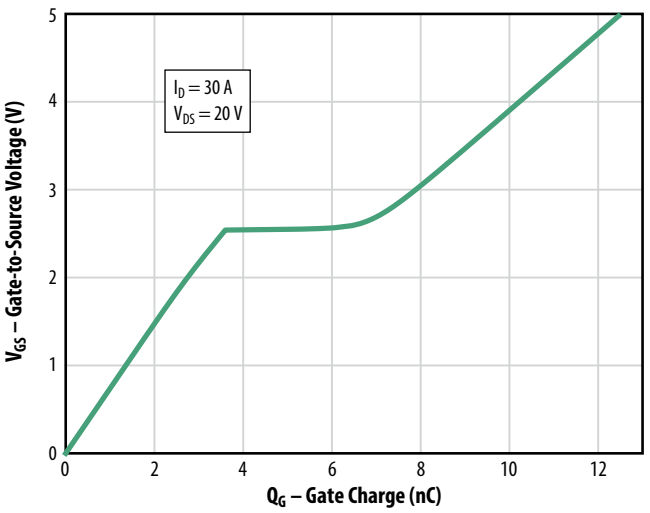

Figure 8: Reverse Drain-Source Characteristics

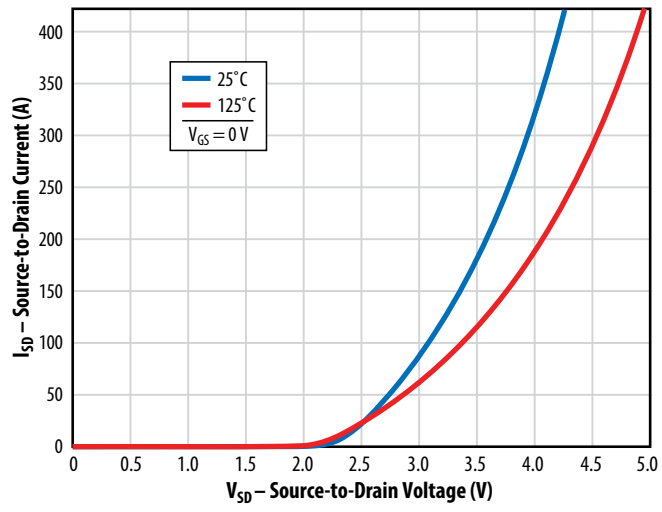

Figure 9: Normalized On-State Resistance vs. Temperature

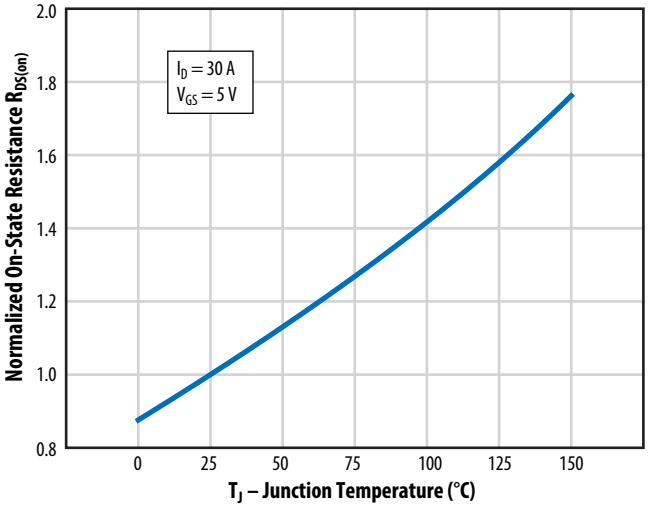

Figure 10: Normalized Threshold Voltage vs. Temperature

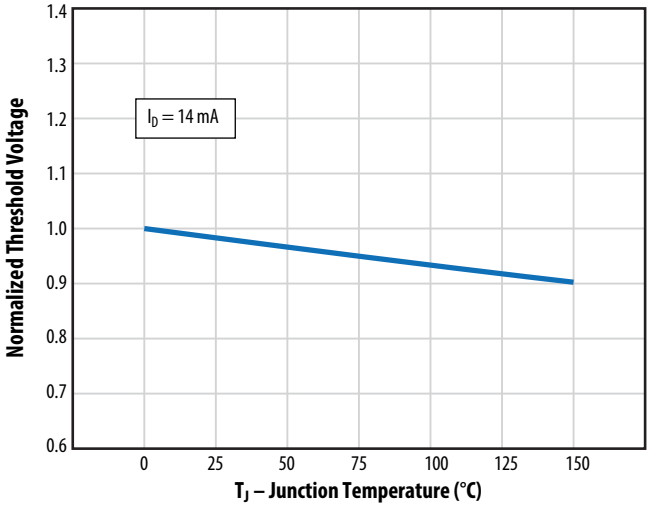

Figure 10: Transient Thermal Response Curves

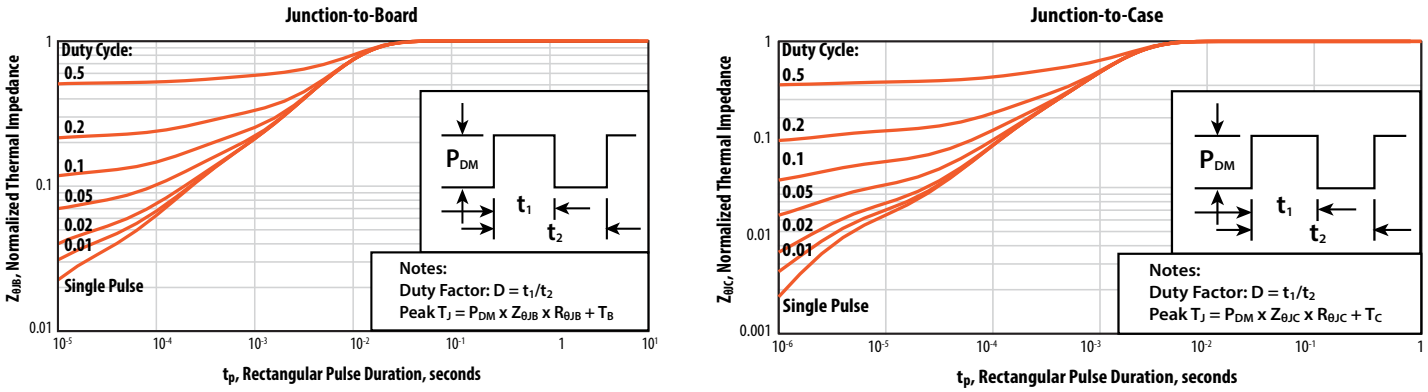

Figure 11: Safe Operating Area

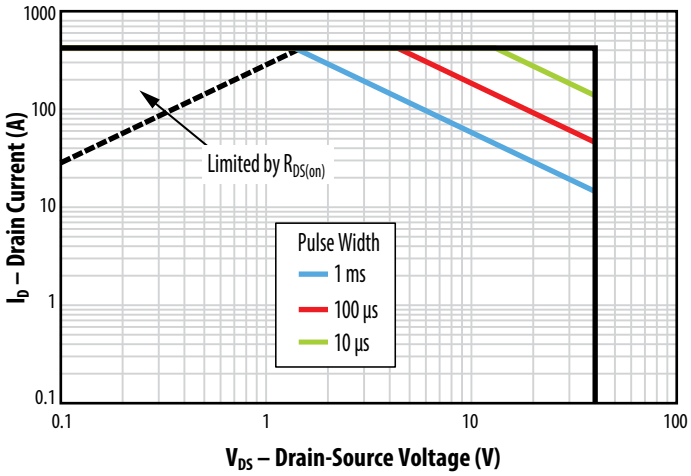

TAPE AND REEL CONFIGURATION

8 mm pitch, 12 mm wide tape on 7" reel

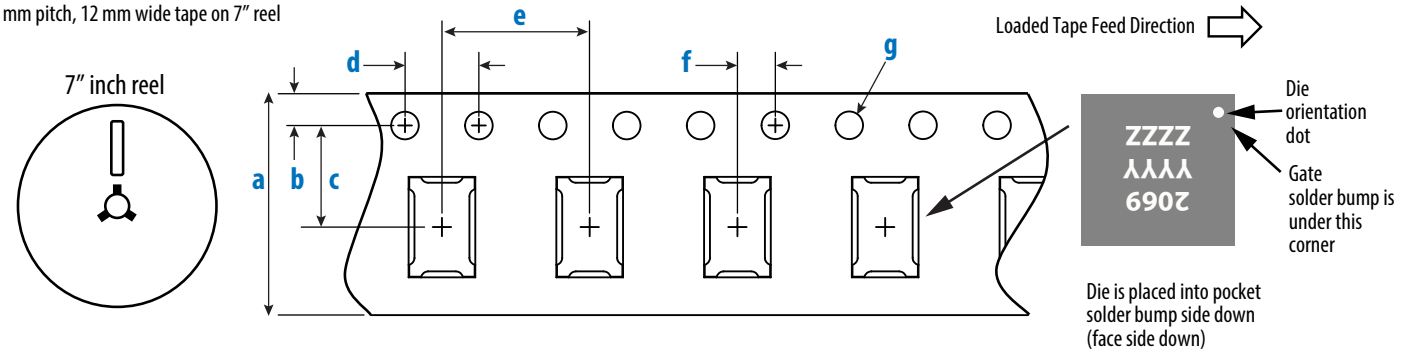

EPC2069 (Note 1)	Dimension (mm) Target	MIN	MAX
a	12.00	11.90	12.30
b	1.75	1.65	1.85
c (Note 2)	5.50	5.45	5.55
d	4.00	3.90	4.10
e	8.00	7.90	8.10
f (Note 2)	2.00	1.95	2.05
g	1.50	1.50	1.60

Note 1: MSL 1 (moisture sensitivity level 1) classified according to IPC/JEDEC industry standard.

Note 2: Pocket position is relative to the sprocket hole measured as true position of the pocket, not the pocket hole.

DIE MARKINGS

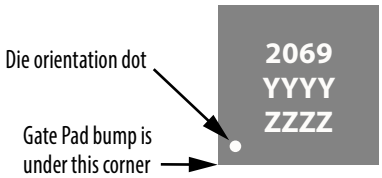

Part Number	Laser Markings Part # Marking Line 1	Lot_Date Code Marking Line 2	Lot_Date Code Marking Line 3
EPC2069	2069	YYYY	ZZZZ

DIE OUTLINE

Solder Bump View

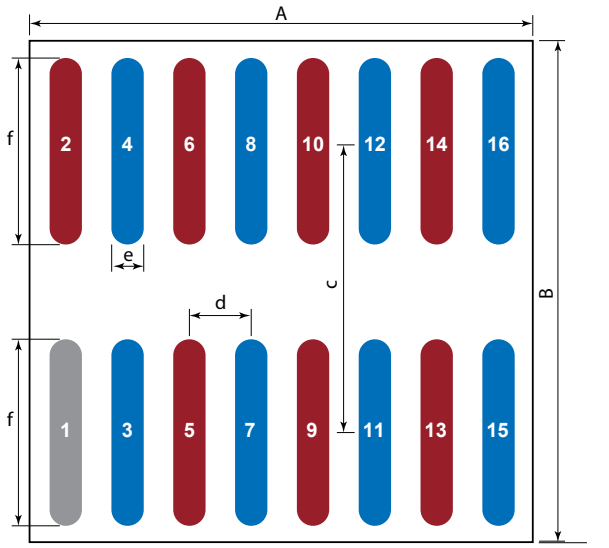

Side View

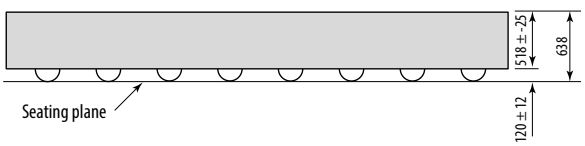

DIM	Micrometers MIN	Nominal	MAX
A	3220	3250	3280
B	3220	3250	3280
c		1805	
d		400	
e	180	200	220
f	1175	1195	1215

Pad 1 is Gate;

Pads 2,5,6,9,10,13,14 are Source;

Pads 3,4,7,8,11,12,15,16 are Drain

RECOMMENDED LAND PATTERN

(units in µm)

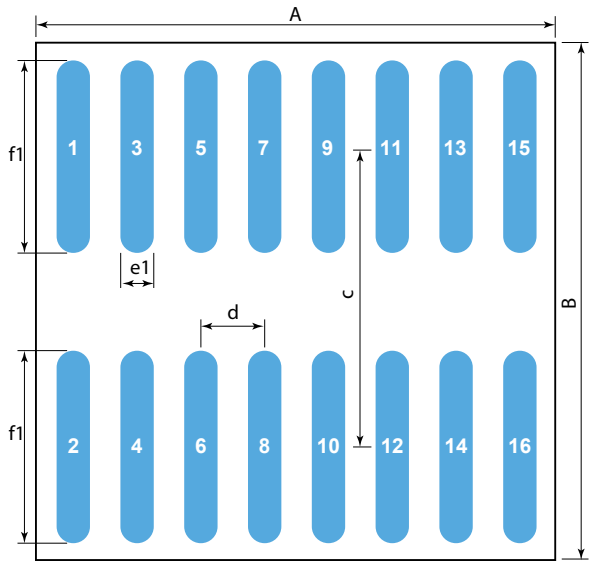

Land pattern is solder mask defined

Solder mask opening is 10 µm

Pad 1 is Gate;

Pads 2,5,6,9,10,13, 14 are Source;

Pads 3,4,7,8,11,12, 15,16 are Drain

DIM	Micrometers
A	3250
B	3250
c	1805
d	400
e1	180
f1	1175

RECOMMENDED STENCIL DRAWING

(units in µm)

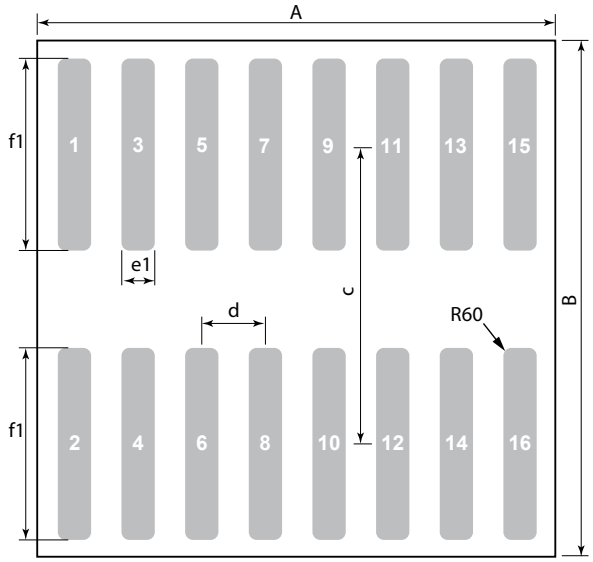

DIM	Micrometers
A	3250
B	3250
c	1805
d	400
e1	180
f1	1175

Recommended stencil should be 4 mil (100 µm) thick, must be laser cut, openings per drawing.

The corner has a radius of R60.

Intended for use with SAC305 Type 4 solder, reference 88.5% metals content.

Additional assembly resources available at https://epc-co.com/epc/DesignSupport/AssemblyBasics.aspx

Efficient Power Conversion Corporation (EPC) reserves the right to make changes without further notice to any products herein to improve reliability, function or design. EPC does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

eGaN® is a registered trademark of Efficient Power Conversion Corporation.

EPC Patent Listing: epc-co.com/epc/AboutEPC/Patents.aspx

Information subject to change without notice.

Revised June 2022