

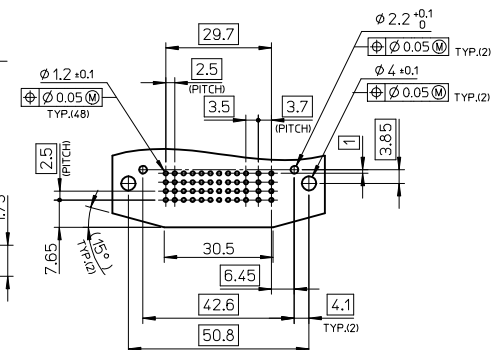



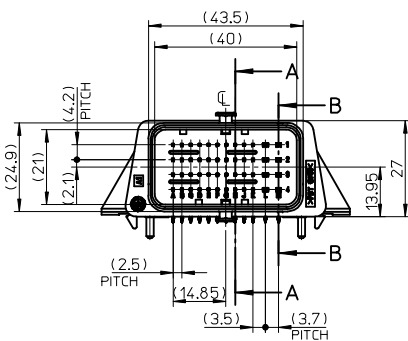

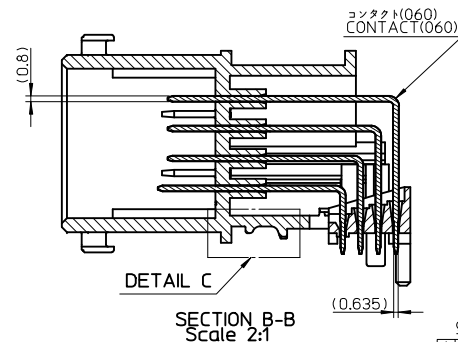
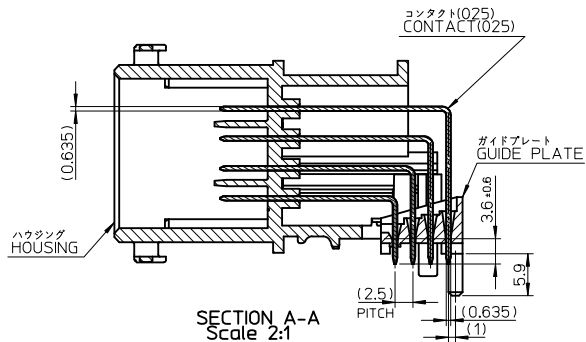



13 12 11 10 9 8 7 6 5 4 3 2 1



基板穴推寸法 (部品実装面)
RECOMMENDED PCB LAYOUT (COMPONENT SIDE)




ガイドプレート位置
GUIDE PLATE POSITION

DETAIL D
Scale 5:1

注記 NOTES

- ハウジング, ガイドプレート材料: PBT-GF30% (黒色)
HOUSING, GUIDE PLATE MATERIAL: PBT-GF30%(BLACK)
- 端子(025,060)材料: 銅合金
CONTACT(025,060) MATERIAL: COPPER ALLOY
- 端子(025,060)のめっき処理: 銅めっき (接点部, テール部), 下地Niめっき
CONTACT(025,060) PLATING: Sn PLATING (CONTACT, SOLDERING AREA), OVER Ni PLATING
- 推奨基板厚: 1.6±0.1mm
RECOMMENDED P.C.B. THICKNESS: 1.6±0.1mm
- 製品仕様書: PS-64319-001参照
PRODUCT SPECIFICATION: REFER TO PS-64319-001





KEY OPTION

BLACK

BROWN

500762-0481

500762-0483



GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3

ANGULAR ±2 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

REVISED
EC NO: 2013/08/23
DRAWN: INQUE02
CHKD: SANDO
APPR: YAMAMOTO
2013/08/29
2014/04/30

DESCRIPTION

DIMENSION STYLE MM ONLY

DRAWN BY	DATE
H. TANAKA	2006/5/22
CHECKED BY	DATE
MA. YAMAMOTO	2006/5/22
APPROVED BY	DATE
A. KANESHIGE	2006/5/22
MATERIAL NO.	

SCALE 1:1

DESIGN UNITS METRIC

THIRD ANGLE PROJECTION

CMC HEADER 48PIN

molex

SEE TABLE

DOCUMENT NO. SD-500762-001

SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

12 11 10 9 8 7 6 5 4 3 2 1