




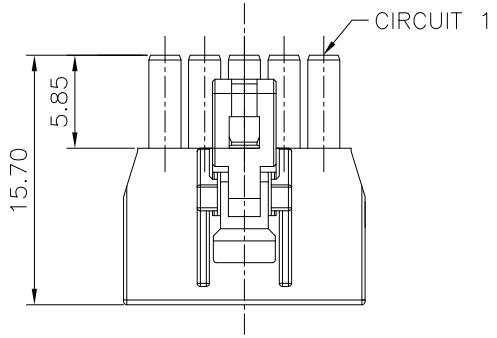

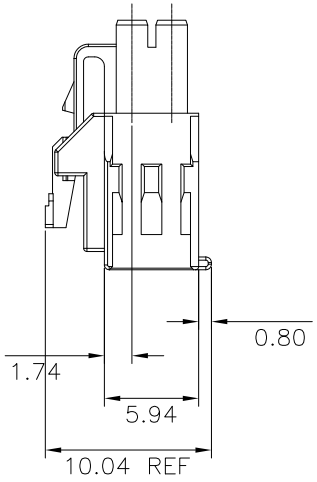


Specifications:
Current Rating:6.5A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:10m ohm. Max.
Insulation Resistance:1000M ohm. Min.
Withstanding Voltage:1500V DC For One Minute
Operating Temperature Range:−40°C To +105°C

Material and Finish
Insulator:PA4T (UL94V−0)
Insulator Color:White&Black



Dimension:

Pos.	Dimension: A
04	7.70
06	10.20
08	12.70
10	15.20
12	17.70
14	20.20
16	22.70
18	25.20

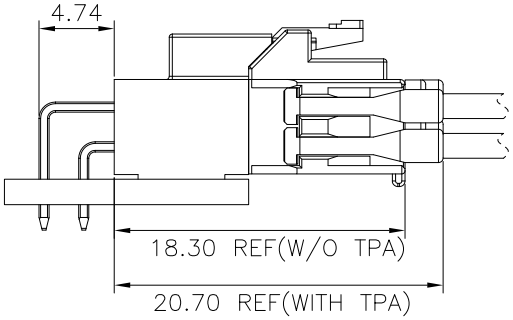

RoHS Compliant

REV	DATE	FILE	BY
	17−Nov−2020		

DRAWN:

CHECKED:

APPROVAL:

GENERAL TOLERANCE:
.X=±0.20
.XX=±0.15

UNIT: MM

SCALE:1:1

SHEET: 1 / 2


PROJECTION:

CnC Tech
Industrial Cable and Connector Technology


DESCRIPTION: 2.5mm Power Housing Double Rows

PART NO: 54025-XX


SIZE A4




BLACK




WHITE




4P




6P




8P




10P




12P




14P




16P



18P





RoHS Compliant

REV	DATE	FILE	BY
	17-Nov-2020		

DRAWN:

CHECKED:

APPROVAL:

GENERAL TOLERANCE:
.X=±0.20
.XX=±0.15

UNIT: MM

SCALE:1:1

SHEET: 2 / 2

PROJECTION:

CnC Tech
Industrial Cable and Connector Technology

DESCRIPTION: 2.5mm Power Housing Double Rows

PART NO: 54025-XX

SIZE A4